

PARTIAL SPECIFICATIONS

I. CODES AND SPECIFICATIONS

- A. GENERAL BUILDING CODE...2018 IBC
- B. CONCRETE CODES...318-14
- C. STRUCTURAL STEEL CODES...AISC 360-16
- D. LIGHT GAUGE STEEL CODES...AISII 300-16
- E. WOOD CODES - N/A
- F. MASONRY CODES - N/A

G. WIND AND SEISMIC CODES - ASCE 7-16

All Codes and Specifications listed above shall include all amendments and addenda in force at the date of the contract documents.

H. CONFLICTS IN STRUCTURAL REQUIREMENTS

Where conflict exists between the various publications as specified herein, the strictest requirements of the various publications shall govern unless noted otherwise. Where conflict exists among the various parts of the Structural Contract Documents, Structural Drawings, General Notes, Specifications) the strictest requirements shall govern.

II. TYPICAL DETAILS

Details labeled "Typical Details" on the drawings shall apply to all situations occurring on the project that are the same or similar to those specifically detailed. Such details shall apply whether or not they are keyed in at each location. Questions regarding applicability of Typical Details shall be determined by the Engineer.

III. DESIGN CRITERIA

A. DEAD LOADS

1. Dead Loads. Dead load materials assumed in the design are shown on the Architectural and Structural Drawings. Any changes in construction materials from those shown on the architectural or structural drawings shall be reported by the General Contractor to the Structural Engineer for verification of load carrying capacity of the structure.

B. LIVE LOADS

Live loads assumed for each area of the structure are shown on the structural drawings. ive loads have been reduced on members supporting the roof based on their tributary area in accordance the building code.

C. BUILDING MOVEMENT AND DEFLECTIONS

1. Roof members. Span over 240 for total loads.
2. Floor members. Span/360 for live loads.
3. Member supporting plaster or masonry. Span over 600 and less than 5/8" for total loads.
4. Drift - Mean roof height over 400 for 10 year wind loads.

IV. FOUNDATION - GENERAL

A. GEOTECHNICAL REPORT

Foundation design is based on the geotechnical investigation provided by Terradyne (H241016) dated April 18, 2024.

B. FOUNDATION APPROVAL AND INSPECTION BY AUTHORIZED INSPECTOR

Unless authorized otherwise by the Owner or Architect, the General Contractor shall notify the Geotechnical Engineer or other authorized inspector for review of foundation bearing surface, inspection of foundation installation, and foundation installation methods and shall not place concrete prior to inspector's approval.

C. FOUNDATION REINFORCING STEEL INSPECTION BY STRUCTURAL ENGINEER

1. The Contractor shall notify the Engineer 72 hours in advance of any major foundation pour.
2. The Contractor shall not pour any foundation concrete without inspection and approval of all reinforcing steel placement by the Structural Engineer or Owner's special inspector.

D. SLAB-ON-GRADE CONSTRUCTION

1. Specification. Unless specified otherwise, slab on grade construction shall follow the recommendations of Guide for Concrete Floor and Slab Construction ACI 302.1R-06.
2. Subgrade Preparation.
- a. Remove all existing pavements, surface vegetation, trees and associated root mats, and any other deleterious material a minimum 5' min beyond the building perimeter.
- b. Remove the top 4 feet of existing soils. The subgrade shall be proof rolled using rubber-tired equipment with a gross vehicle weight not less than 30,000 pounds, such as a fully loaded water truck. A minimum of three passes shall be made. Areas with excessive deformation or pumping shall be removed and replaced to achieve a stable subgrade.
- c. After proof-rolling, the subgrade soil shall be scarified to a depth of 9 inches, moistured conditioned, and compacted to 95% std proctor density at -2% to +2%.
- d. The pad shall be constructed of 6 feet of select fill. Placed fill shall extend to an elevation of 4" below bottom of slab.
- e. A final 4" lift of aggregate base (TxDot item 247, type A, grade 1-2) shall be placed at 95%-98% std. proctor density.
- f. A 10 mil vapor barrier shall be placed directly below the slab. All joints shall be lapped 6" minimum and shall be sealed.
- g. Slab on grade concrete shall not be poured against a final prepared subgrade containing free water, ice, frost, mud or other unsuitable material.
3. Select Fill.
- a. Material designated in these General Notes, drawings, or specifications as select fill shall be free of organics, construction debris, and shall be free rocks larger than 2" in diameter, with plasticity index between 5 and 15, and a liquid limit less than 35. Select fill shall be placed in loose lifts not exceeding 8" and compacted to at least 95% std proctor density with moisture content -2% to +2%.
- b. The General Contractor shall submit to the Architect, Structural Engineer, and Geotechnical Engineer, the source of all fill material with samples to be tested by the Owner's testing laboratory for approval prior to placement on the job. Verification will be required by the testing laboratory each time the source or character of the material changes.
4. Reinforcing Steel.
- a. See the drawings for typical slab reinforcement requirements.
- b. All welded wire fabric shall be furnished in flat sheets. Lap ends and sides one cross wire spacing plus 4" at splices.
- c. Lap continuous slab on grade reinforcing steel 30 bar diameters at splices but not less than 12".
- d. Steel for slabs on grade shall be chaired with slab bolsters designed for support on soil to provide specified cover to reinforcing steel.
5. Construction and Control Joints. See details on the drawings for requirements of construction joints, control joints, and pour size and sequence for slab-on-grade construction.

V. FOUNDATION CONSTRUCTION

A. SPECIFICATION

Spread footing construction shall conform to the requirements of the Standard Building Code Requirements for structural concrete (ACI 318) published by the American Concrete Institute, except as modified hereafter by these General Notes, the structural drawings, or the specifications.

B. DESIGN SOIL PRESSURES

All foundation grade beams and footings shall bear on an approved building pad. Design soil pressure is 3000psf for continuous footings and 3000psf for individual footings.

C. CONCRETE COVER

1. The minimum protection for reinforcement shall be 3" clear from face of soil.

D. TOP ELEVATION

The top elevation of each footing is shown on the drawings. The elevations are minimum and are intended for bid purposes only. The actual required bearing elevation may vary as required to provide proper bearing capacity in a bearing stratum as determined by the Geotechnical Engineer or Engineer of Record.

E. TEMPLATES FOR ANCHOR BOLTS

Vertical reinforcing steel and anchor bolts for column base plates shall be accurately set in footing and pedestal tops using 3/4" plywood or 5/8" steel templates. Such templates shall be detailed and submitted with concrete reinforcing steel shop drawings.

VI. CONCRETE

A. CLASSES OF CONCRETE

All concrete shall conform to the requirements as specified in the table below unless noted otherwise on the drawings:

	Usage	28-day PSI	Slump	Max Agg.	Max w/c	Notes
1	Structural Slab At Grade	4000	4"	1"	.49	No Air
2	Foofings, Beams, & Retaining Wall	3500	3"	1 1/2"	0.45 MAX	
3	Elevated Slab	3000	3"	1"	.52	No Air
4	Elevator Pit & Walls	3500	3"	1 1/2"	0.45 MAX	Add Xypex

B. CONCRETE MIX DESIGNS

1. Engineer Approval. Concrete mix designs must be submitted a minimum of 15 days prior to the start of the work for Engineer and Owner's testing laboratory approval prior to placement of concrete in the plant or field. Any adjustments in approved mix designs including changes in admixtures must be submitted in writing to the Engineer and Owner's testing laboratory for approval prior to use in the field.
2. Pumped Concrete. Concrete designed to be pumped shall be so noted on the mix designs and shall have mix proportions compatible with the pumping process.
3. Calcium Chloride and/or fly ash is strictly prohibited.

VII. CONCRETE FORMWORK

A. RESPONSIBILITY

The design, construction, and safety of all formwork shall be the responsibility of the General Contractor. All forms, shores, backshores, falsework, bracing, and other temporary supports shall be designed to support all loads imposed including the wet weight of concrete, construction equipment, live loads, lateral loads due to wind and wet concrete imbalance. The Contractor shall also be responsible for determining when temporary supports, shores, backshores, and other bracing may be safely removed.

VIII. CONCRETE FINISH

Refer to the Specifications for concrete finish requirements including concrete surface tolerances (flatness and levelness).

IX. REINFORCING STEEL

A. SPECIFICATION

1. Reinforcing Steel. ASTM A 615 Grade 60 unless noted otherwise on the drawings. Welded Reinforcing Steel - ASTM A 706.
2. Deformed Bar Anchors. ASTM A 496 minimum yield strength 70,000 PSI (reinforcing bars may not be substituted for deformed bar anchors without Engineer approval).
3. Welded Wire Fabric. Welded smooth wire fabric, ASTM A 185, yield strength 65,000 PSI. Welded deformed wire fabric for, ASTM A 497, yield strength 70,000 PSI. All welded wire fabric shall be furnished in flat sheets only.
4. Post tension cables. ASTM A-416, 1/2"Ø, 270 k.s.i., low relaxation, seven strand. Additionally, all post tension cables shall be obtained from a P.T.I. certified plant.

The Contractor shall submit mill certificates of all reinforcing steel products signed by producer and by the Contractor.

B. DETAILING AND BAR SUPPORTS

Detailing of and bar supports for reinforcing steel shall be in accordance with the ACI Standard Details and Detailing of Concrete Reinforcement as reported by ACI Committee 315.

C. MANUAL OF CONCRETE PRACTICE

Unless noted otherwise, methods of estimating, detailing, fabricating, placing and contracting for reinforcing materials shall follow the Manual of Standard Practice as published by the Concrete Reinforcing Steel Institute.

D. SHRINKAGE AND TEMPERATURE REINFORCEMENT

Provide shrinkage and temperature reinforcement at right angles to main top and bottom bars for all slabs unless detailed otherwise on the drawings. See drawings for sizes and spacings.

E. REINFORCING STEEL COVERAGE

Reinforcing steel coverage shall conform to the requirements specified on the plans and specifications. The reinforcing steel detailer shall adjust reinforcing steel cage sizes at intersecting structural members as required to allow clearance for intersecting reinforcing bar layers maintaining minimum specified cover. Cover not indicated on the plans and specifications shall conform to the requirements of ACI 318-II Section 7.7 unless specified otherwise on the drawings.

F. CONCRETE COVER SHALL BE AS FOLLOWS, UNLESS SHOWN OTHERWISE:

1. Concrete cast against earth, 3".
2. Concrete cast against cardboard void boxes, 2".
3. Concrete exposed to weather, 2".
4. All other concrete, 3/4".

X. TILT-UP PANEL CONCRETE: N/A

XI. STRUCTURAL STEEL

A. MATERIAL

1. Hot Rolled Structural Members. All hot rolled steel plates, shapes, sheet piling, and bars shall be new steel conforming to ASTM Specification A6.
2. ASTM Specification and Grade
- Clearly mark the grade of steel on each piece, with a distinguishing mark visible from floor surfaces, for the purpose of field inspection of proper grade of steel. Unless noted otherwise on the drawings, structural steel shall be as follows:
- a. Wide Flange Sections. A992-50
- b. Edge Angles and Bent Plates. A 36.
- c. Tube Sections. ASTM A500, Grade C.
- d. Baseplates. ASTM A36.
- e. Anchor Rods: ASTM F1554-36
- f. Connection Material.
- (1) Beam, Column Stiffener Plates and Doubler Plates. Beam column stiffener plates and doubler plates shall be the grade of steel to which they are connected (highest grade if more than one grade is used).
- (2) All connection material, except as noted otherwise herein or on the drawings, including bearing plates, gusset plates, stiffener plates, filler plates, angles, etc. shall be A36 steel unless a higher or matching grade of steel with the members connected is required by strength or stiffness calculation and provided the resulting sizes are compatible with the connected members.
- g. Other Steel.
- Any other steel not indicated otherwise shall conform to ASTM A36.
- B. CONNECTIONS
1. Typical connection details are indicated on the drawings.
2. Design Procedure.
- a. Connection types to be used are indicated on the drawings.
- b. The design of all steel connections for the project shall be based on standard AISC LRFD tabulated connections.
3. Design Intent. It is the intention of the plans and specifications that shop connections be welded or bolted and that field connections be bolted, unless detailed otherwise on the drawings.
4. a. All typical beam simple connections shall be standard AISC connections.
- b. Seated connections shall not be used unless approved by EOR.
- c. Connections shall be designed to resist one half the total uniform load capacity from the table of Uniform Load Constants in the AISC LRFD Manual for given shape, span, and grade of steel.

XII. ANCHOR BOLTS

A. SPECIFICATION

All anchor bolts shall be made from threaded round stock conforming to ASTM F-1554 grade 36 steel unless otherwise detailed on the drawings.

B. NUTS

All nuts with anchor bolts shall be hex head conforming to ASTM Specification A563.

C. WASHERS

Where indicated, base plates shall have plate washers, 1/4" thick, extending minimum 1" from edge of base plate holes on each side with AISC standard holes. Washers shall conform to ASTM A36 steel.

D. TEMPLATES

All anchor bolts set in concrete shall utilize 3/4" thick plywood templates same size as the base plate. Templates shall be detailed on the concrete shop drawings.

XIII. LIGHT GAUGE STEEL

- A. All light gauge members shall be designed in accordance with American Iron and Steel Institute.
- B. All light gauge metal framing members shall be of the type, size, and gauge as shown on the plans, minimum 43 mil.
- C. All posts, joists, and accessories shall be primed with rust inhibitive paint meeting the performance requirements of TT-P-636C, or shall be formed steel having a G-60 galvanized coating conforming to ASTM A924.
- D. All members shall meet the requirements of ASTM A607 Class 2 Grade 55 with a minimum yield of 55,000 PSI.
- E. Welding, where permitted, is to be done per manufacturer's recommendations on rod type and amperage. Minimum gauge for welding shall be 54 mil. Welds within exterior framing walls shall be touched up with zinc rich primer.
- F. All light gauge metal framing shall be installed per manufacturer's recommendations regarding minimum installation standards for bearing, bridging, and bracing.
- G. Light gauge member designations are per the 2012 AISI North American specifications.
- H. All connections shall be welded, screwed or powder fastened as indicated on these drawings.
- Welds- All welded connections shall be performed in accordance with the last edition of the AWS D1.3 specification for welding sheet steel in structures. All welding shall be performed by AWS certified welders. All welds shall be cleaned and coated with rust inhibitive zinc paint.
- Screws- #10 self drilling screws manufactured by grabber or HILTI and installed per the fastener manufacturer's specifications. Minimum 1/2" length for light gauge to light gauge connections. (Minimum 1 1/2" length for light gauge to timber connections.) Screws shall be spaced at a minimum of 1 1/2" between adjacent screws and from metal edges.
- Powder Activated Fasteners (P.A.F.)- 0.138" minimum shank diameter P.A.F., manufactured by Ramset or HILTI and installed per the fastener manufacturer's specifications.
- Provide minimum 1 1/2" long P.A.F. for light gauge connections to concrete. P.A.F. in concrete shall be spaced a minimum of 4" between adjacent P.A.F. and a minimum of 3" from concrete edges. Minimum P.A.F. embedment in concrete shall be 1 1/2".
- Provide minimum 3/2" long P.A.F. with knurled shanks for light gauge connections to structural steel, P.A.F. Shall be spaced a minimum 1 1/2" between adjacent P.A.F. in structural steel and a minimum of 1/2" from steel edges. The P.A.F. point shall be driven completely through the back side of the structural steel member.

Masonry Anchors- 3/4" diameter x 2" long self-drilling screw anchors manufactured by Ramset (Tapcon) or HILTI (Kwik Con II) and installed per the fastener manufacturer's specifications for light gauge connections to concrete masonry.

Drive-in Expansion Anchors (Mushroom Head)- 3/4" diameter x 1 1/2" long Zamac Nailin by Rawl, metal by HILTI or Hammer Set by Ramset and installed per the manufacturer's specifications. Anchors in concrete shall be spaced a minimum of 4" between adjacent anchors and a minimum of 3" from concrete edges. Minimum anchor embedment in concrete shall be 1 1/2".

Expansion Anchors- Provide minimum 3/2" diameter Kwik Bolt II Expansion anchors by HILTI or equal, with a minimum 2 1/2" embedment into concrete. Minimum spacing between adjacent expansion anchors to be 5". Expansion anchors shall be located a minimum of 3" from concrete edges. Use oversize washers for attaching light gauge with expansion anchors. Install per the manufacturer's specifications for light gauge connections to concrete.

J. All members shall be cut squarely for attachment to perpendicular members or slope cut as required for an angular fit against abutting members.

K. Field cutting of light gauge members shall be done by sawing or shearing. Torch cutting of light gauge members is not permitted.

L. Do not cut or splice light gauge framing members unless indicated by these drawings.

M. Do not bear or connect light gauge members within twelve inches of the punched openings in the member webs unless the members are reinforced with a minimum 18" long unpunched track or stud at the punch opening. The track or stud reinforcing piece shall be the same size and gauge as the punched member. Fasten the reinforcing piece to the member with a minimum of four screws.

N. The light gauge framing has been designed to support the loads indicated in the calculations. Additional temporary bracing and shoring shall be provided as required to stabilize the framing and to support construction loads. Temporary bracing shall remain in place until permanent bracing is installed and/or additional construction loads are removed.

XIV. STRUCTURAL MASONRY - N/A

XV . NON-SHRINK GROUT FOR BASE PLATES AND BEARING PLATES

A. TYPE

Grout for base plates and bearing plates shall be a non-metallic, shrinkage resistant, premixed, non-corrosive, non-staining product containing Portland cement, silica sands, shrinkage compensating agents, and fluidity improving compounds.

B. SPECIFICATIONS

Non-shrink grout shall conform to Corps of Engineers Specification for Non-Shrink Grout, CE-CRD-C621.

C. COMPRESSIVE STRENGTH

Twenty-eight day compressive strength as determined by grout cube tests, shall be: 7,500 PSI.

D. PLACEMENT

Grout shall be placed in a fluid flowable state under baseplates that have a form built around them for grout confinement. Grout shall be cured according to manufacturer's recommendations.

E. MINIMUM THICKNESS

Minimum thickness of grout under all baseplates and bearing plates shall be 1 1/2", unless specified otherwise on the drawings.

STRUCTURAL LOADS

ROOF DESIGN LOADS:

DEAD LOADS:	PSF:	SNOW LOADS:
STANDING SEAM	1.5	5 PSF Ground
INSULATION	1.0	Ce = 0.9
FRAMING	2.5	I = 1.0
		Ct = 1.1

COLLATERAL LOADS:

		WIND:
DUCTING/PIPING	1.5	EXP. C, CAT II
ELECTRICAL	1.5	ENCLOSED (GCpI=±0.18)
SPRINKLER	2	Vult = 122 MPH
		Vasd = 94 MPH

FLOOR DEAD:

SLAB AND DECK	44.5	SEISMIC:
FINISHES	5	Ss = 0.068, S1 = 0.04

FLOOR LIVE LOADS:

OFFICE	50	SITE CLASS D
STORAGE	125	Sds= 0.073, Sd1 = 0.065
		DESIGN CAT A
		BASE SHEAR: 85.5k
		FORCE RESISTING SYSTEM:
		LIGHT FRAME WALLS
		SHEATHED WITH STEEL
		SHEETS
		Os = 0.011
		R = 6.5
		ANALYSIS PROCEDURE:
		EQUIVALENT LATERAL FORCE

ROOF LIVE LOADS:

20 Reducible

PARTITION LOADS:

N/A

ROOF AND FLOOR FRAMING NOTES

1. All point loads on roof purlins shall bear within 24" of support. All point loads not addressed on the drawings (i.e. piping) shall not exceed 100 pounds per joist.
2. All lines of bridging and blocking interrupted by roof penetrations shall be terminated at the penetration point(s). Substitute diagonal bridging in the 2 adjacent panels on either side of the penetration. All locations shall be noted on the shop and erection drawings.
3. All roof top units (RE: mechanical) shall be located within in the areas shown.
4. Components and cladding shall be designed for a net unfactored wind loads as tabulated herein, RE: 2/S1.1.
5. Lateral stability for this structure is provided by the light gauge framed walls sheathed with metal panels (RE: S4). The stability of the structure shall be the responsibility of the general contractor and the steel erector until all wind resisting elements are in place and accepted in writing by the engineer.
6. Typical roof deck shall be 24 gauge, 16" Battenlok HS by MBCI, Re: Arch for finish. Attachment shall be per mfg. but as a minimum: one (1) 24 ga. panel clip each purlin with one (1) #12-14x1" self-tapping hex-head screw.
7. Floor deck shall be 2.0CD-18 composite metal deck as manufactured by New Millennium, or approved equal. Attachment to structure shall be #12 teks on 36/4 pattern with 3-#10 sidelap fasteners. Deck shall be attached with #12 teks @ 6" o.c. @ perimeter and at all deck laps.
8. Interior suspended floor slabs shall be 22" 4000 psi normal weight concrete over 2" metal deck (4 1/2" total thickness). Reinforcement shall be 6x6 W2.1xW2.1, centered between ribs and top of concrete. Slabs shall be placed at the specified thickness. Girder beams may require additional reinforcement, RE: Plan.
9. All elevated slabs shall be placed in one continuous pour. In the event that the concrete cannot be placed in a single monolithic placement, the following shall be performed.
- a. The concrete shall be sawn or broken back to the middle third of the span.
- b. The vertical face of the concrete shall be roughened.
- c. An epoxy bonding agent shall be applied prior to the second pour.

POST INSTALLED ANCHOR NOTES

I. ANCHORAGE TO CONCRETE

- A. Adhesive Anchors for Cracked and Uncracked Concrete Use:
1. HILTI HIT-HY 200 safe set system with the HILTI HIT-Z rod per ICC ESR-3187
2. HILTI HIT-HY 200 safe set system with Hilti hollow drill bit (te-cd or te-yd) and vc 20/40 vacuum (vc 20-u or vc 40-u) system with HAS-E threaded rod per ICC ESR-3187
3. HILTI HIT-RE 500 v3 safe set system with Hilti hollow drill bit (te-cd or te-yd) and vc 20/40 vacuum (vc 20-u or vc 40-u) system with HAS-E threaded rod per ICC ESR-3814
4. HILTI HIT-RE 500 v3 safe set system with hilti roughening tool (te-yrt) with HAS-E threaded rod per ICC ESR-3814 for diamond cored holes.
- B. Medium Duty Mechanical Anchors for Cracked and Uncracked Concrete Use:
1. HILTI KWIK HUS EZ and KWIK HUS EZ-I screw anchors per ICC ESR-3027
2. HILTI KWIK BOLT-TZ2 expansion anchors per ICC ESR-4266
3. HILTI KWIK BOLT 1 expansion anchors per ER-678
- C. Heavy Duty Mechanical Anchors for Cracked and Uncracked Concrete Use:
1. HILTI HDA undercut anchors per ICC ESR 1546
2. HILTI HSL-3 expansion anchors per ICC ESR 1545

II. REBAR DOWELING INTO CONCRETE

- A. Adhesive Anchors for Cracked and Uncracked Concrete Use:
1. HILTI HIT-HY 200 safe set system with hilti hollow drill bit (te-cd or te-yd) and vc 20/40 vacuum (vc 20-u or vc 40-u) system with continuously deformed rebar per ICC ESR-3187
2. HILTI HIT-HY 500 v3 safe set system with hilti hollow drill bit (te-cd or te-yd) and vc 20/40 vacuum (vc 20-u or vc 40-u) system with continuously deformed rebar per ICC ESR-3814
3. HILTI HIT-RE 500 v3 safe set system with hilti roughening tool (te-yrt) with continuously deformed rebar per ICC ESR-3814 in diamond cored holes


III. ANCHORAGE TO SOLID GROUTED MASONRY

A. Adhesive Anchors Use:

1. HILTI HIT-HY 70 masonry adhesive anchoring system (ICC pending).
2. Steel anchor element shall be HILTI HAS-E continuously threaded rod or continuously deformed steel rebar.

B. Mechanical Anchors Use:

1. HILTI Kwik Bolt-TZ2 expansion anchors per ICC ESR 4561
2. HILTI Kwik Bolt 1 expansion anchors per ER - 677

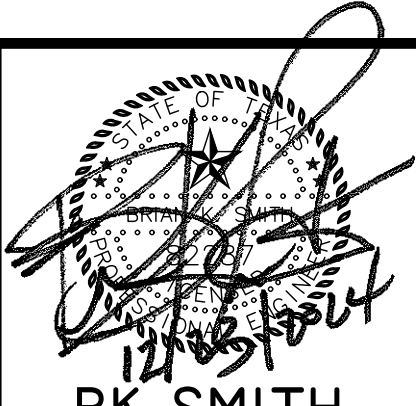

BK SMITH
ENGINEERING CO., INC.
1916 CITIZENS BANK DRIVE
BOSSIER CITY, LOUISIANA
71301-7410
TX FIRM #22371

ISSUE DATE

NO.	DATE	DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group

ARCHITECTURE

9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co

SHEET TITLE

GENERAL NOTES
AND SPECIFICATIONS

SHEET NUMBER

S1

OF SHEETS

ISSUED FOR PERMIT

SPECIAL INSPECTIONS


SOILS - SECTION 1705.6			
SPECIAL INSPECTION	REFERENCED STANDARD	MARK IF REQ'D	CONT./ PERIODIC "C" OR "P"
1. VERIFY MATERIALS BELOW SHALLOW FOUNDATION ARE ADEQUATE TO ACHIEVE THE DESIGN BEARING CAPACITY		☒	P
2.VERIFY EXCAVATIONS ARE EXTENDED TO PROPER DEPTH AND HAVE REACH PROPER MATERIAL		☒	P
3. PERFORM CLASSIFICATION AND TESTING OF COMPACTED FILL MATERIALS		☒	P
4. VERIFY USE OF PROPER MATERIALS, DENSITIES AND LIFT THICKNESSES DURING PLACEMENT AND COMPACTION OF COMPACTED FILL		☒	C
5. PRIOR TO PLACEMENT OF COMPACTED FILL, INSPECT SUBGRADE AND VERIFY THAT SITE HAS BEEN PREPARED PROPERLY		☒	P
CONCRETE - SECTION 1705.3			
SPECIAL INSPECTION	REFERENCED STANDARD	MARK IF REQ'D	CONT./ PERIODIC "C" OR "P"
1. INSPECT REINFORCEMENT, INCLUDING PRESTRESSING TENDONS, AND VERIFY PLACEMENT	ACI 318 CH. 20, 25.2, 25.3, 26.6.1-26.6.3 IBC 1908.4	☒	P
2. REINFORCING BAR WELDING:			
a. VERIFY WELDABILITY OF REINFORCING BARS OTHER THAN ASTM A706;	AWS D1.4; ACI 318: 26.6.4	☐	P
b. INSPECT SINGLE-PASS FILLET WELDS, MAXIMUM 3/16"; AND	AWS D1.4; ACI 318: 26.6.4		P
c. INSPECT ALL OTHER WELDS.	AWS D1.4; ACI 318: 26.6.4	☐	C
3. INSPECT ANCHORS CAST IN CONCRETE	ACI 318: 17.8.2	☒	P
4. INSPECT ANCHORS POST-INSTALLED IN HARDENED CONCRETE MEMBERS.	ACI 318:17.8.4	☐	C
a. ADHESIVE ANCHORS INSTALLED IN HORIZONTALLY OR UPWARDLY INCLINED ORIENTATIONS TO RESIST SUSTAINED TENSION LOADS.	ACI 318:17.8.2	☒	P
b. MECHANICAL ANCHORS AND ADHESIVE ANCHORS NOT DEFINED IN 11.a	ACI 318: CH. 19, 26.4.3, 26.4.4 IBC 1904.1, 1904.2, 1908.2, 1908.3	☒	P
5. VERIFY USE OF REQUIRED DESIGN MIX	ACI 318: CH. 19, 26.4.3, 26.4.4 IBC 1904.1, 1904.2, 1908.2, 1908.3	☒	P
6. PRIOR TO CONCRETE PLACEMENT, FABRICATE SPECIMENS FOR STRENGTH TESTS, PERFORM SLUMP AND AIR CONTENT TESTS, AN DETERMINE THE TEMPERATURE OF THE CONCRETE.	ASTM C172; ASTM C31; ACI 318: 26.4, 26.12	☒	C
7. INSPECT CONCRETE AND SHOTCRETE PLACEMENT FOR PROPER APPLICATION TECHNIQUES	ACI 318: 26.5 IBC 1908.6, 1908.7, 1908.8	☒	C
8. VERIFY MAINTENANCE OF SPECIFIED CURING TEMPERATURE AND TECHNIQUES	ACI 318: 26.5.3 - 26.5.5 IBC 1908.9	☒	P
9. INSPECT PRESTRESSED CONCRETE FOR:			
a. APPLICATION OF PRESTRESSING FORCES; AND	ACI 318: 26.10	☐	C
b. GROUTING OF BONDED PRESTRESSING TENDONS	ACI 318: 26.10	☐	C
10. INSPECT ERECTION OF PRECAST CONCRETE MEMBERS	ACI 318: 26.8	☐	P
11. VERIFY IN-SITU CONCRETE STRENGTH, PRIOR TO STRESSING OF TENDONS IN POST-TENSIONED CONCRETE AND PRIOR TO REMOVAL OF SHORES AND FORMS FROM BEAMS AND STRUCTURAL SLABS.	ACI 318: 11.2	☐	P
12. INSPECT FORMWORK FOR SHAPE, LOCATION AND DIMENSIONS OF THE CONCRETE MEMBER	ACI 318: 11.1.2 (b)	☒	P
STEEL-SECTION 1705.2M			
SPECIAL INSPECTION	REFERENCED STANDARD	MARK IF REQ'D	CONT./ PERIODIC "C" OR "P"
1. STRUCTURAL STEEL: SPECIAL INSPECTION AND NONDESTRUCTIVE TESTING OF STRUCTURAL STEEL ELEMENTS IN BUILDINGS, STRUCTURES AN DPORTIONS THEREOF SHALL BE IN ACCORDANCE WITH THE QUALITY ASSURANCE INSPECTION REQUIREMENTS OF AISC 360	AISC 360 CHAPTER N	☒	PER REF. STANDARD
a. MATERIAL VERIFICATION OF STRUCTURAL STEEL SHALL COMPLY WITH THE REQUIREMENTS OF SECTION 6.1 OF THE CODE OF STANDARD PRACTICE.	SECTION 6.1 OF THE CODE OF STANDARD PRACTICE	☒	
b. WELDING, HIGH STRENGTH BOLTING, AND DETAILS IN ACCORDANCE WITH SECTION N5	AISC 360 SECTION N5	☒	PER REF. STANDARD
c. STEEL DECK AND HEADED STEEL STUD ANCHOR PLACEMENT AND ATTACHMENT IN ACCORDANCE WITH SECTION N6	AISC 360 SECTION N6	☒	PER REF. STANDARD
d. CUT SURFACES IN ACCORDANCE WITH SECTION M2.2	AISC 360 SECTION M2.2	☒	
e. HEATING FOR STRAIGHTENING IN ACCORDANCE WITH SECTION M2.1	AISC 360 SECTION M2.1	☐	
f. TOLERANCES FOR FIELD ERECTION IN ACCORDANCE WITH SECTION 7.13 OF THE CODE OF STANDARD PRACTICE	SECTION 7.13 OF THE CODE OF STANDARD PRACTICE	☒	
2. COLD-FORMED STEEL DECK	SDIQA/QA	☐	
3. COLD-FORMED STEEL TRUSSES SPANNING 60 FEET OR GREATER		☐	
FIRE - RESISTANT PENETRATIONS AND JOINTS - SECTION 1705.17			
SPECIAL INSPECTION	REFERENCED STANDARD	MARK IF REQ'D	CONT./ PERIODIC "C" OR "P"
1. PENETRATION FIRESTOPS: INSPECTIONS OF PENETRATION FIRESTOP SYSTEMS THAT ARE TESTED AND LISTED IN ACCORDANCE WITH SECTIONS 714.3.1.2 AND 471.4.4.2 SHALL BE CONDUCTED BY AN APPROVED INSPECTION AGENCY IN ACCORDANCE WITH ASTM E2174		☒	
2. FIRE - RESISTANT JOINT SYSTEMS: INSPECTION OF FIRE - RESISTANT JOINT SYSTEMS THAT ARE TESTED AND LISTED IN ACCORDANCE WITH SECTIONS 715.3 AND 715.4 SHALL BE CONDUCTED BY AN APPROVED INSPECTION AGENCY IN ACCORDANCE WITH ASTM E2393		☒	

2

DESIGN ULTIMATE WIND PRESSURES, W FOR COMPONENTS AND CLADDING (psf) - ASCE 7-10

	ZONE*	EFFECTIVE WIND AREA (sqft)	POSITIVE PRESSURE	NEGATIVE PRESSURE
ROOF	1	10	16.2	-63.6
	1	25	16.0	-49.7
	1	50	16.0	-45.5
	1	100	16.0	-39.9
	1'	10	16.2	-36.5
	1'	25	16.0	-36.5
	1'	50	16.0	-24.7
	1'	100	16.0	-19.6
	2	10	16.2	-83.9
	2	25	16.0	-66.0
	2	50	16.0	-60.6
	2	100	16.0	-53.5
WALLS	3	10	16.2	-114.4
	3	25	16.0	-78.5
	3	50	16.0	-67.7
	3	100	16.0	-53.5
	4	10	36.5	-39.6
	4	50	32.8	-35.8
	4	200	29.5	-32.6
	4	500	27.4	-30.4
	5	10	36.5	-48.7
	5	50	32.8	-41.2
	5	200	29.5	-34.7
	5	500	27.4	-30.4

* REFERENCE FIGURE BELOW FOR LOCATIONS OF ZONES 1,2, AND 3. ZONE 4 INCLUDES THOSE WALL ELEMENTS LOCATED OUTSIDE OF 15 FEET OF A BUILDING CORNER, AND ZONE 5 INCLUDES THOSE WALL ELEMENTS LOCATED WITHIN 15 FEET OF A BUILDING CORNER.

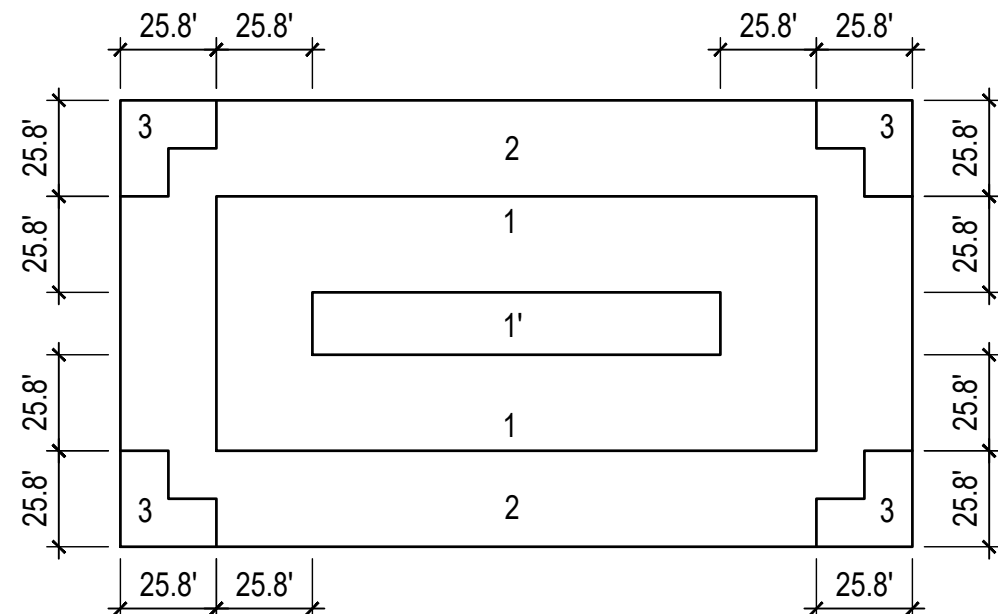

3

LAP SCHEDULES

TENSION SPLICES (IN.)			
3,000 psi CONCRETE			
NORMAL REBAR			
BAR SIZE	TOP BARS		OTHER BARS
	A	B	A B
#3	22	28	17 22
#4	29	38	22 29
#5	36	47	28 36
#6	43	56	33 43
#7	63	81	48 63
#8	72	93	55 72
#9	81	105	62 81
#10	91	118	70 91
#11	101	131	78 101
TENSION SPLICES (IN.)			
4,000 psi CONCRETE			
NORMAL REBAR			
BAR SIZE	TOP BARS		OTHER BARS
	A	B	A B
#3	19	25	15 19
#4	25	33	19 25
#5	31	41	24 31
#6	37	49	29 37
#7	54	71	42 54
#8	62	81	48 62
#9	70	91	54 70
#10	79	102	61 79
#11	87	114	67 87


4

STRUCTURAL ABBREVIATIONS

NS - NEAR SIDE OF
DETAIL AS PICTURED
FS - FAR SIDE OF
DETAIL AS PICTURED
T/D - TOP OF DECK
T.O.P. - TOP OF PARAPET
T.O.F. - TOP OF FOOTING
T.O.B. - TOP OF BEAM
T.O.S. - TOP OF STEEL
PAF - POWDER ACTUATED
FASTENERS


5

STRUCTURAL LEGEND

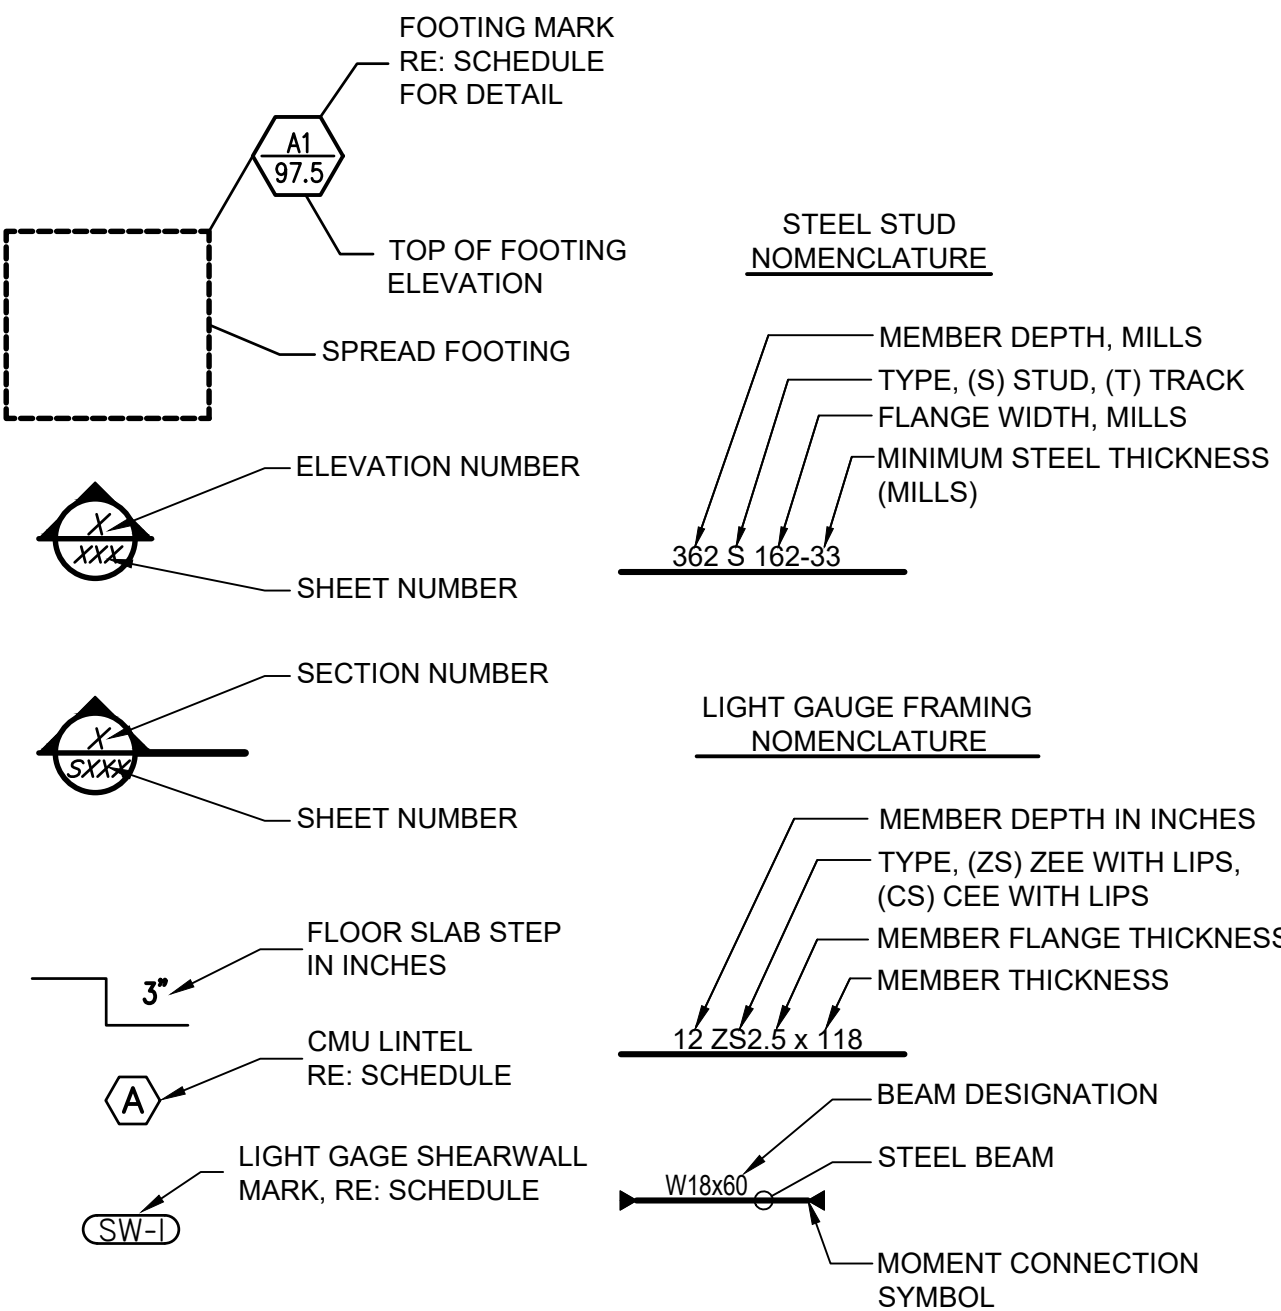


6

TENSION DEVELOPMENT (EMBEDMENT) LENGTH FOR STANDARD END HOOKS (GRADE 60 BARS-NORMAL WEIGHT CONCRETE-GENERAL USE)

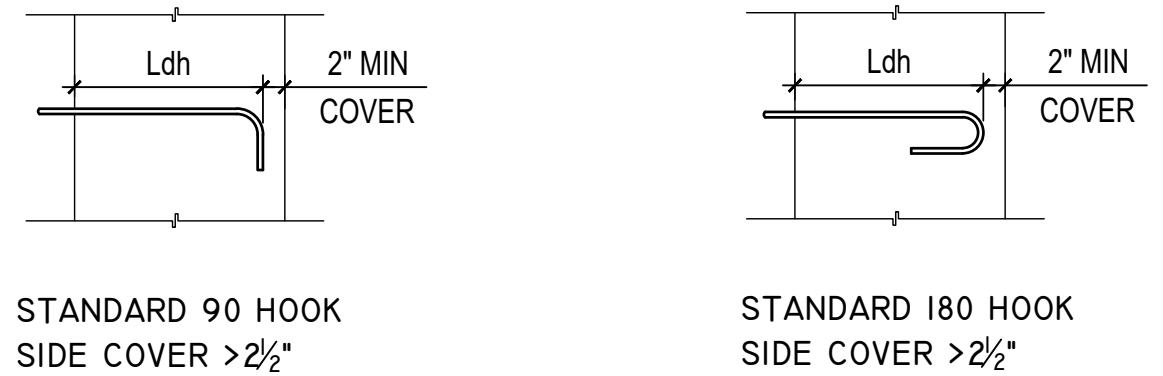

BAR SIZE	f'c=3000 psi	f'c=4000 psi	f'c=5000 psi	f'c=6000 psi
	Ldh	Ldh	Ldh	Ldh
#3	9"	7"	7"	6"
#4	11"	10"	9"	8"
#5	1'-2"	1'-0"	11"	10"
#6	1'-5"	1'-3"	1'-1"	1'-0"
#7	1'-7"	1'-5"	1'-3"	1'-2"
#8	1'-10"	1'-7"	1'-5"	1'-4"
#9	2'-1"	1'-10"	1'-7"	1'-6"
#10	2'-4"	2'-0"	2'-10"	1'-8"
#11	2'-6"	2'-2"	2'-0"	1'-10"

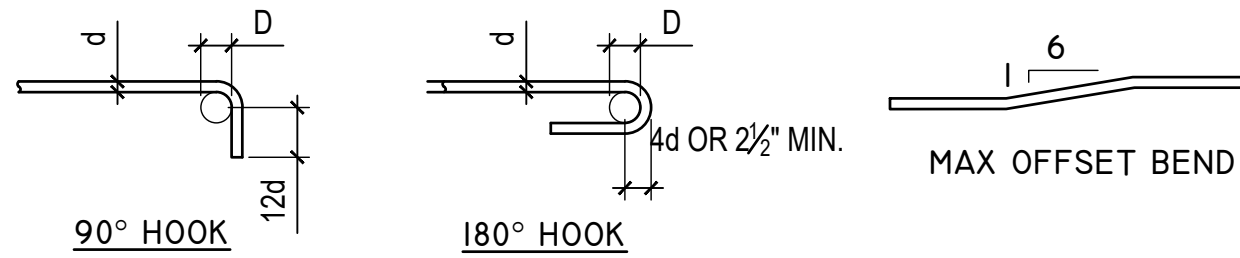

NOTE: FOR 'D' ETC SEE CRSI HANDBOOK GOVERNING EDITION.

PRINCIPAL REINFORCING

BAR DIA	MIN "D"
#3	2 3/4"
#4	3"
#5	5 3/4"
#6	4 5/8"
#7	5 3/4"
#8	6"
#9	9"
#10	10 3/4"
#11	11 1/2"

DETAIL NOTES:

- BENDS SHALL BE MADE COLD.
- #14 AND #18 BARS SHALL BE BEND-TESTED AND APPROVED PRIOR TO BENDING.



1916 CITIZENS BANK DRIVE
BOSSIER CITY, LOUISIANA
318-741-0127
TX FIRM #22371

ISSUE DATE

NO.	DATE	DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group

ARCHITECTURE

9415 E. HARRY ST.
SUITE 405
WICHITA,KS 67207
(316) 618-0448
sally@kgdinc.co

SHEET TITLE
GENERAL NOTES
AND SPECIFICATIONS

SHEET NUMBER

S1.1

OF SHEETS

ISSUED FOR PERMIT

ISSUE		DATE
NO.	DATE	DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

**Kaufman
Design
Group**


ARCHITECTURE

9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co

SHEET TITLE
FOUNDATION PLAN

SHEET NUMBER

S2
OF SHEETS

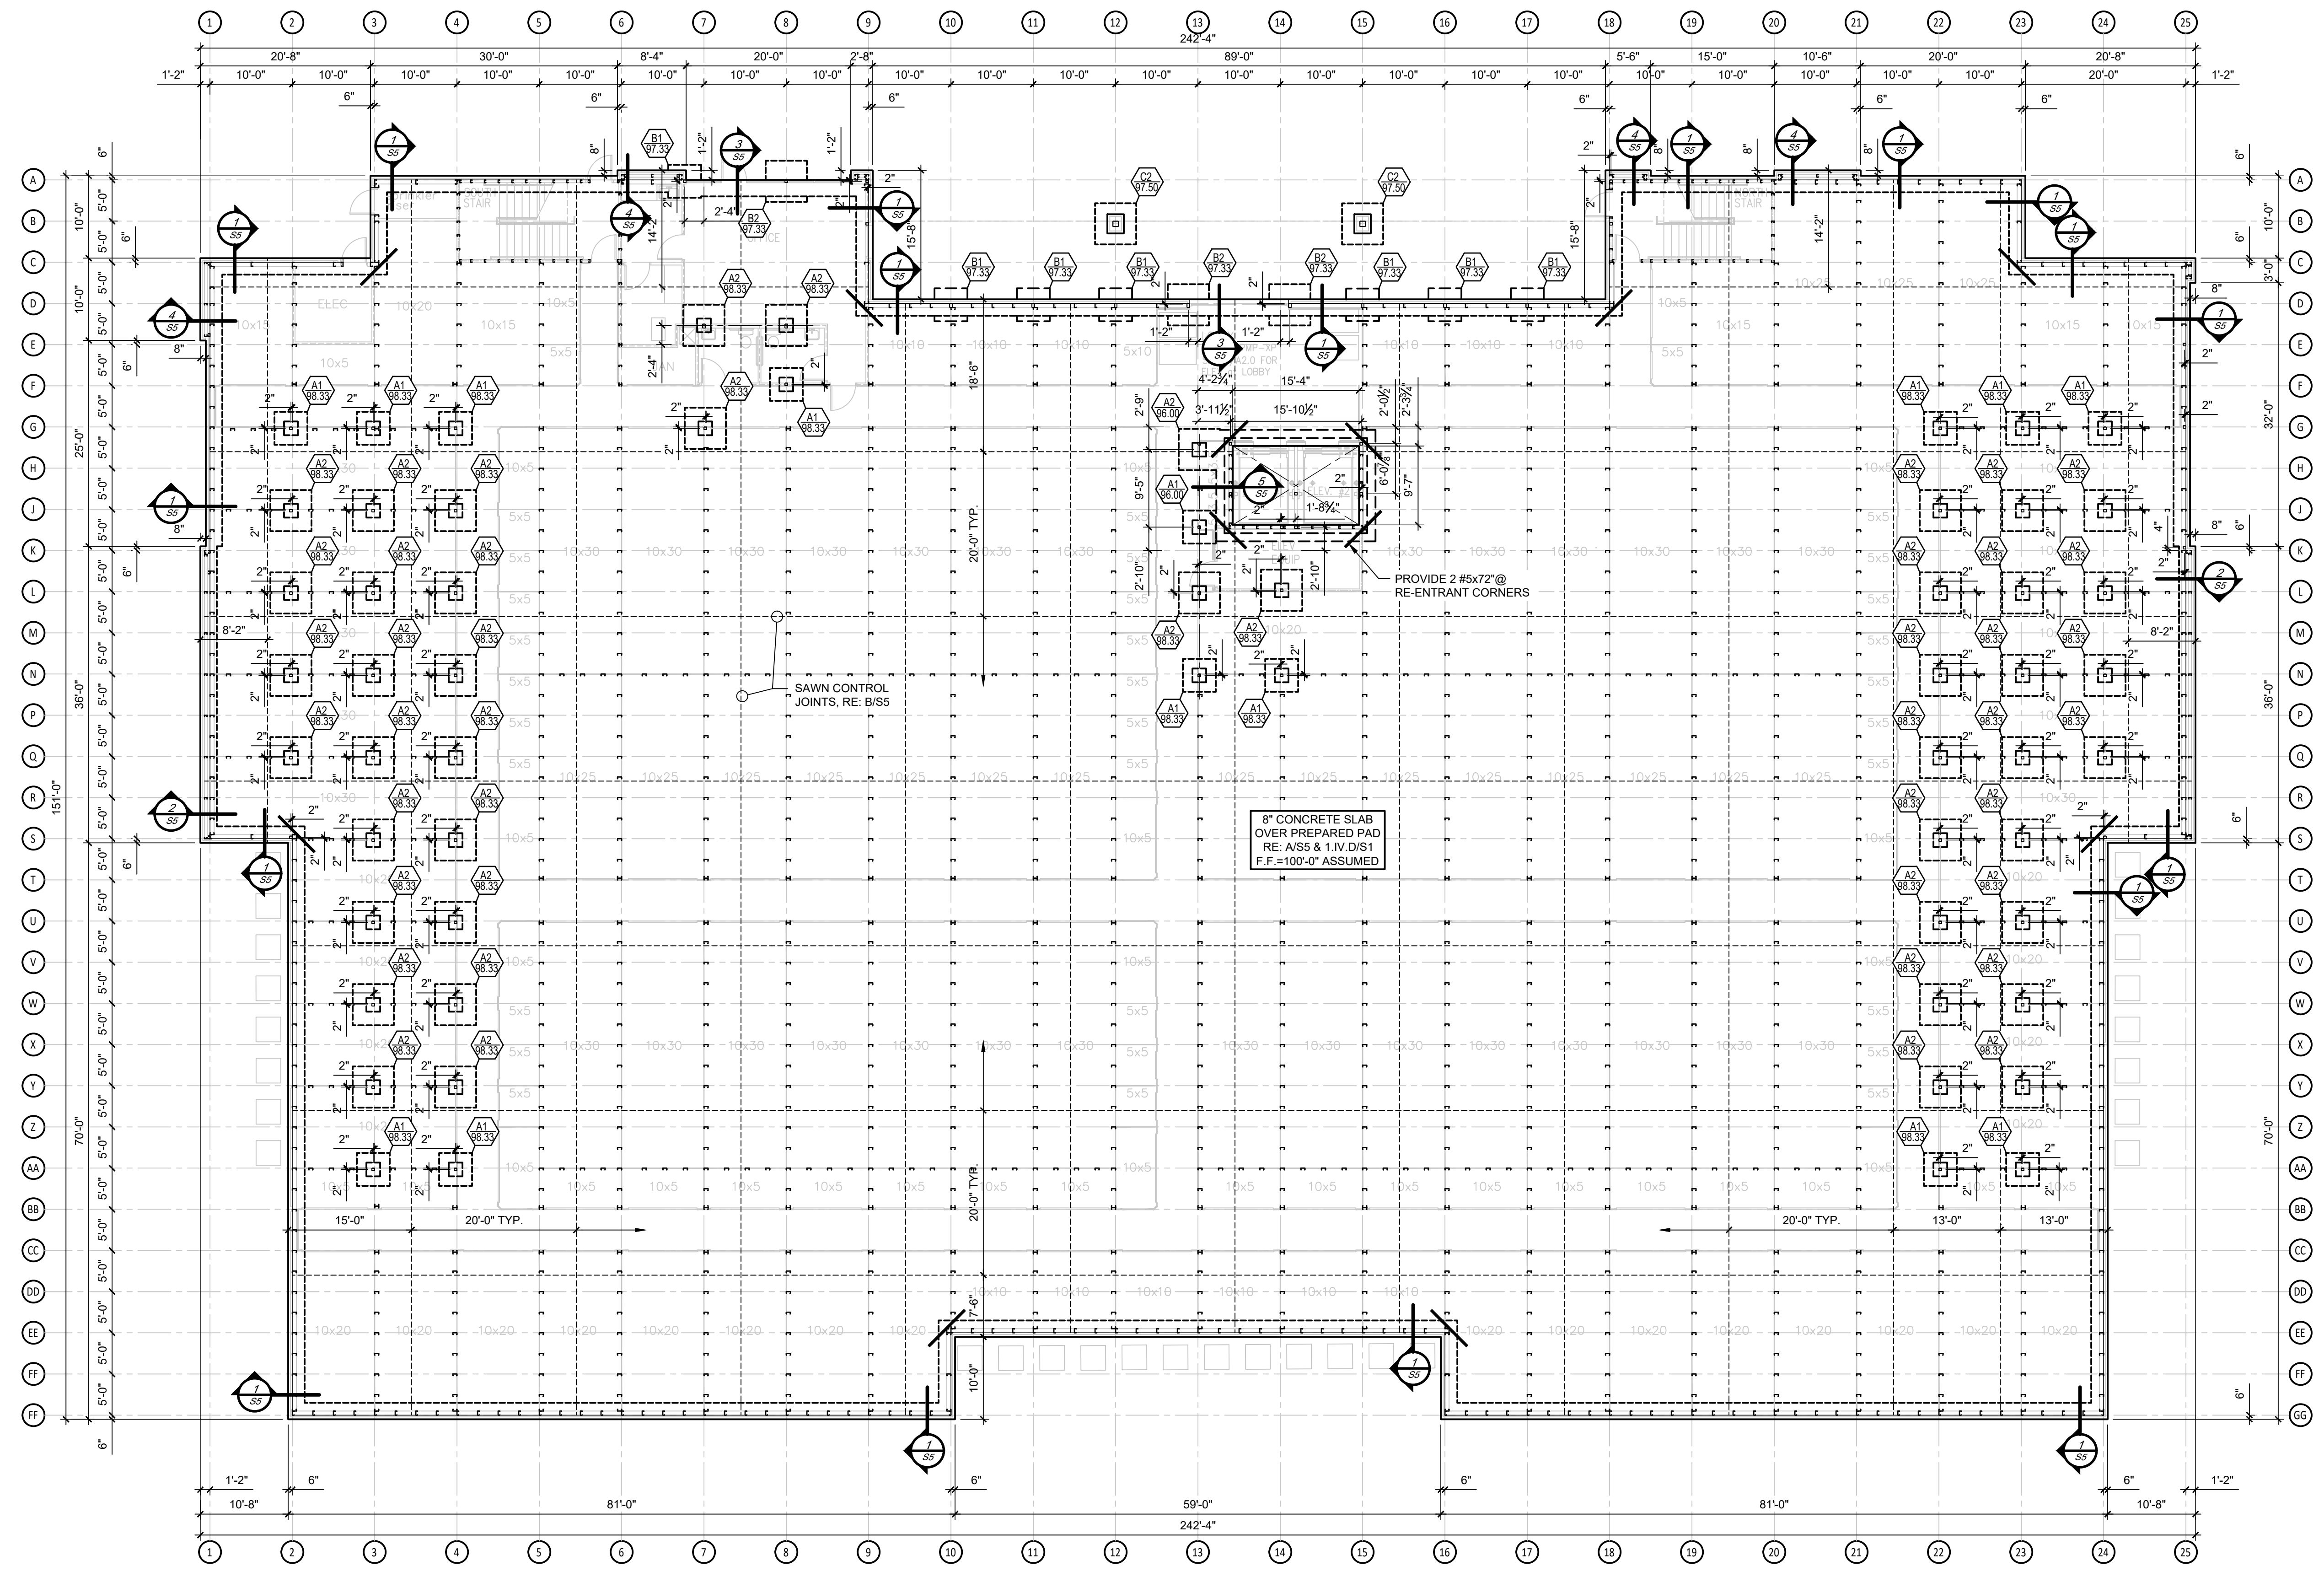

FOUNDATION PLAN
SCALE: 3/32" = 1'-0"

- 2 FOUNDATION NOTES**
- CONTROL JOINTS SHALL BE 20' O.C.E.W. MAX LOCATE MIN 1'-0" FROM POSTS, RE: B/SS.1
 - CONTRACTOR SHALL PLACE SLAB IN SUCH A MANNER TO PROVIDE THE FOLLOWING FINISHED TOLERANCES: FF/FL=25/18.
 - SLAB SHALL BE PLACED MONOLITHIC OR IN STRIPS, CHECKERBOARD PLACEMENT NOT ALLOWED.
 - SAND CUSHION SHALL BE DAMPENED BUT NOT SATURATED PRIOR TO CONCRETE PLACEMENT.
 - ALL JOINTS SHALL BE SEALED WITH A SELF LEVELING POLYURETHANE.
 - WHERE SLAB PLACEMENT OPERATIONS ARE INTERRUPTED FOR MORE THAN 45 MINUTES, CONTRACTOR SHALL REMOVE CONCRETE TO THE NEAREST SCHEDULED CONTROL JOINT & INSTALL A CONSTRUCTION JOINT, RE: D/SS.1
 - ALL SAWN JOINTS SHALL BE CUT USING THE SOFF-CUT SYSTEM & SHALL BE CUT AS SOON AS THE SLAB WILL SUPPORT THE WEIGHT OF THE EQUIPMENT BUT IN NO CASE BEYOND 4 HOURS.
 - ALL FOOTINGS SHALL BEAR ON NATIVE SOILS OR SELECT FILL AT A DEPTH OF 24" MINIMUM BELOW EXISTING GRADE.
 - ALL FOOTINGS SHALL BE CENTERED ON HSS COLUMNS UNLESS OTHERWISE NOTED.

3 FOOTING SCHEDULE				
MARK	SIZE		REINFORCEMENT	
	BxW	T	TOP	BOTTOM
A1	4'-0"x4'-0"	1'-3"	5-#5s EA WAY	5-#5s EA WAY
A2	5'-0"x5'-0"	1'-3"	6-#5s EA WAY	6-#5s EA WAY
B1	4'-0"x4'-0"	1'-3"	5-#5s EA WAY	5-#5s EA WAY
B2	5'-0"x5'-0"	1'-3"	6-#5s EA WAY	6-#5s EA WAY
C2	5'-0"x5'-0"	1'-3"	6-#5s EA WAY	6-#5s EA WAY



ISSUE DATE

DATE	DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP

MAGNOLIA VILLAGE STORAGE

38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group

ARCHITECTURE

415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
ally@kgdinc.co


SHEET	TITLE
-------	-------

2nd FLOOR FRAMING PLAN AND SCHEDULES

SHEET NUMBER

S3

OF SHEETS

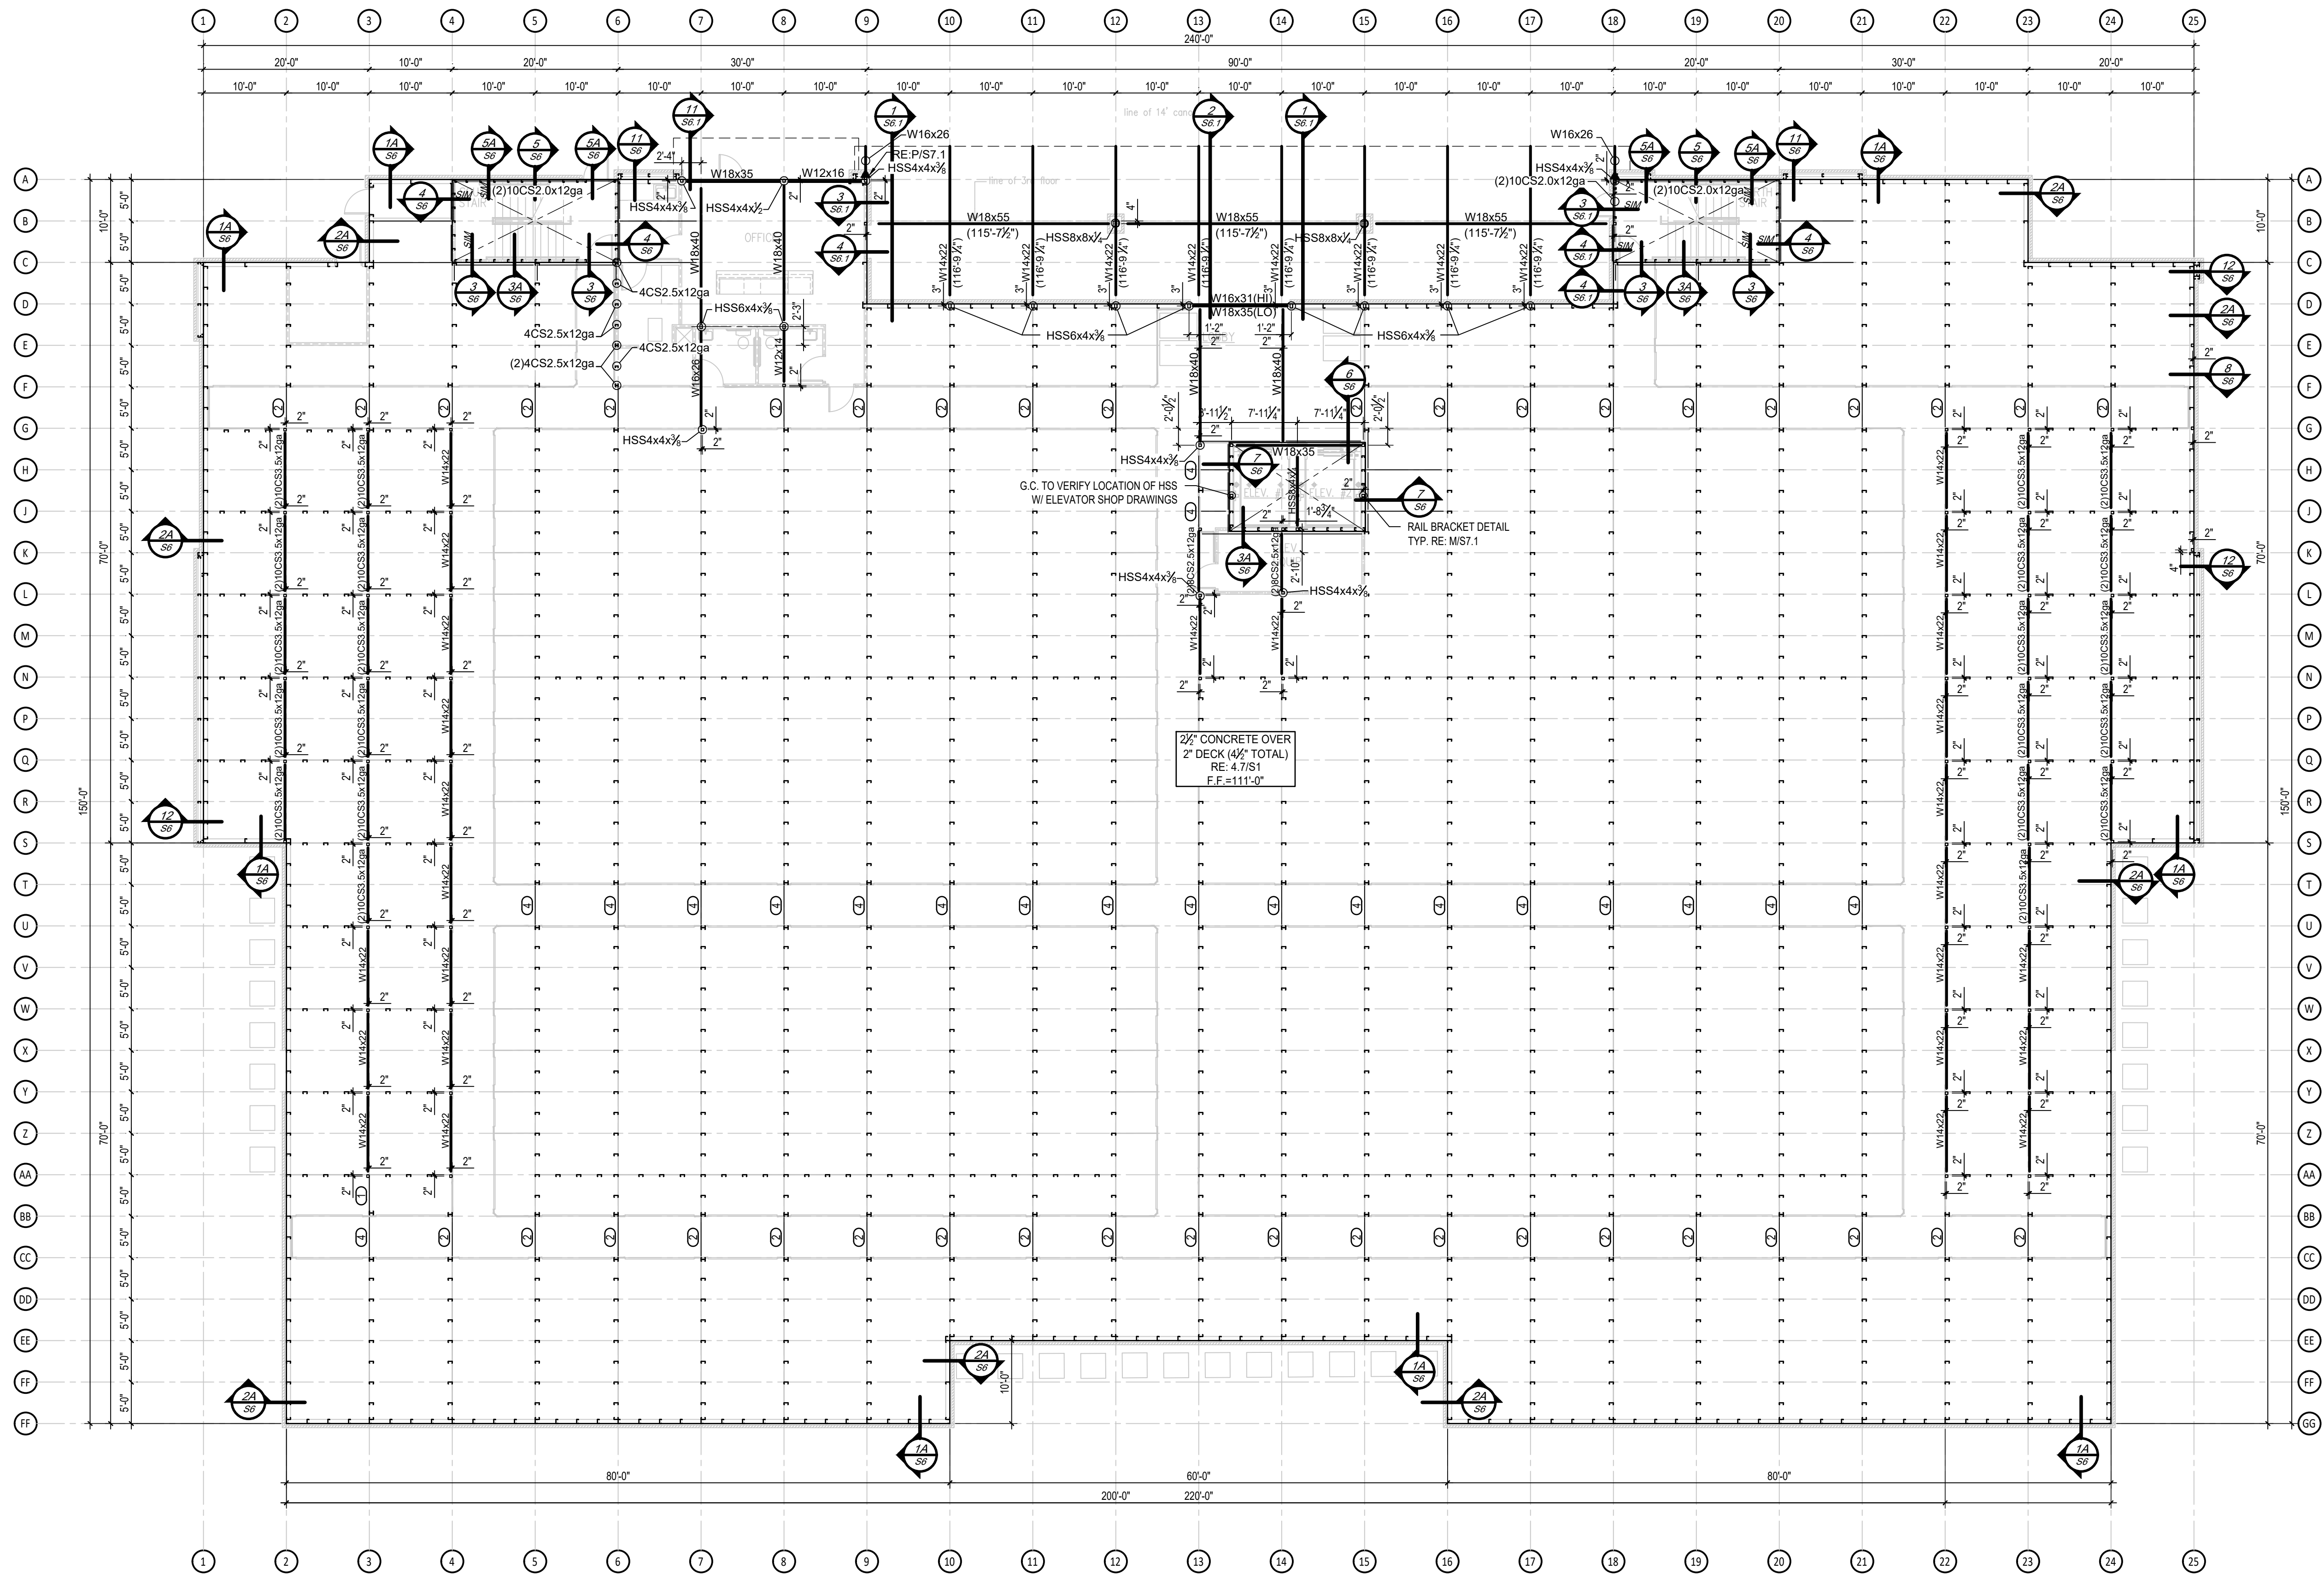

2ND FLOOR FRAMING PLAN

SCALE: 3/32" = 1'-0"

NOTE:

ALL POST SHOWN ARE SUPPORTING THE FRAMING SHOWN HEREON.

- * INTERIOR POST: 6CSx2.5x14ga. @ 2'-6" o.c. U.N.O. W/ 3rd POINT BRACING
- * EXTERIOR POST: 6CSx2.5x12ga. @ 5'-0" o.c. U.N.O. W/ MIDSPAN BRACING
- * STAIR & ELEVATOR POST: 4CSx2.5x12ga @ 20" o.c. U.N.O. FULLY BRACED
- * AT STUCCO, BLOCK, & BRICK VENEER LOCATIONS, INFILL W/ 6CS2.5x16ga @ 24" o.c.
- * AT BUMP OUT LOCATIONS: 4CS2.5x12ga @ 60" o.c.

NOTE:

STAIRS ARE A DEFERRED SUBMITTAL. PROVIDE SIGNED AND SEALED
DRAWINGS AND CALCULATIONS

FRAMING NOTES:

- ALL COLUMNS SHALL BE HSS4x4 $\frac{1}{4}$ EXCEPT AS NOTED.
- ALL COLUMNS SHALL BE CONTINUOUS. STEEL TO STEEL SPLICING AT FLOORS IS ACCEPTABLE. RE: P&Q/S7
- INFILL CEE POSTS FOR SHEAR WALLS SPACED @ 2'-6" o.c. AT THE NON-LOADING BEARING WALL LOCATIONS SHALL BE INSTALLED AFTER ELEVATED SLAB HAS BEEN PLACED.

2 BEAM SCHEDULE


MARK	SIZE	END STUDS
①	(2)6CS2.5x14ga	(2)4CS2.5x16ga
②	(2)10CS2.5x12ga	(2)6CS2.5x14ga
③	(2)6CS2.5x14ga	(2)4CS2.5x12ga
④	(2)6CS2.5x14ga	(2)6CS2.5x14ga
⑤	6CS2.5x14ga	4CS2.5x16ga

3 LOOSE LINTEL SCHEDULE




SPAN	TYPE	MEMBER	BRG	NOTES
0 < L ≤ 48"	A	L4x4 x/8	6	
42" < L ≤ 72"	A	L5x5 x/8	8	
L > 72"	REFERENCE FRAMING SECTIONS			


ISSUED FOR PERMIT

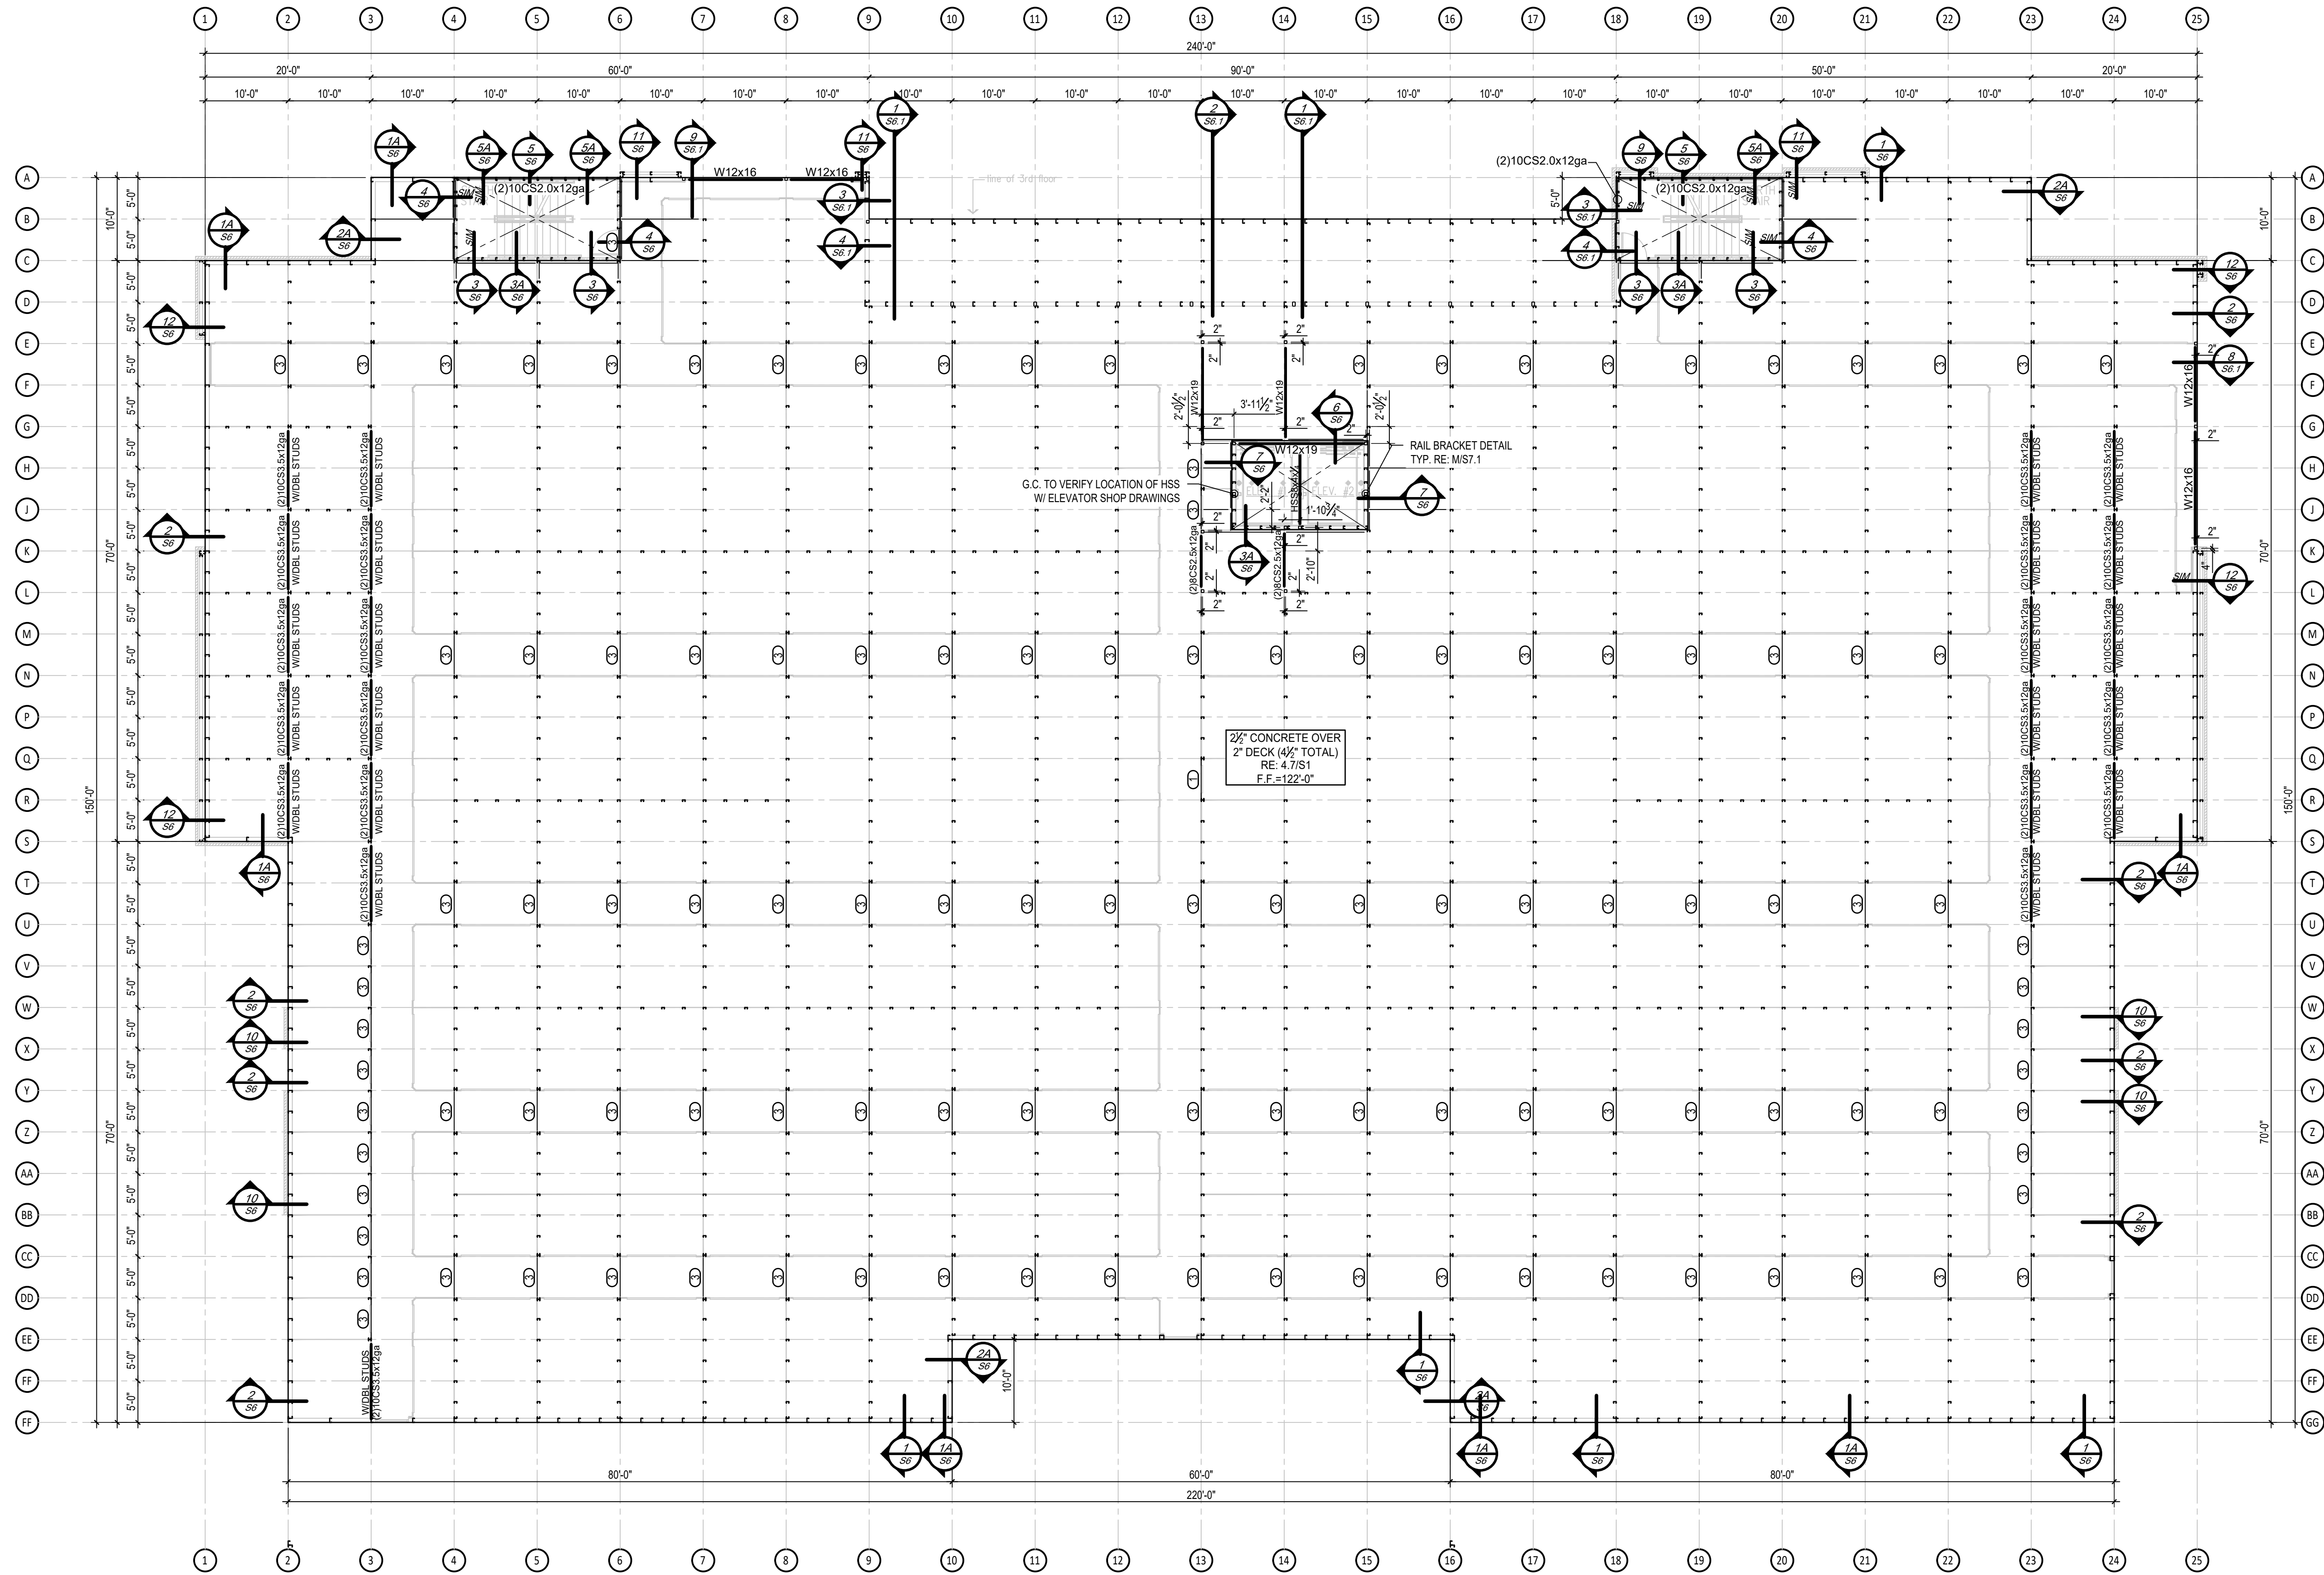

ISSUED FOR PERMIT

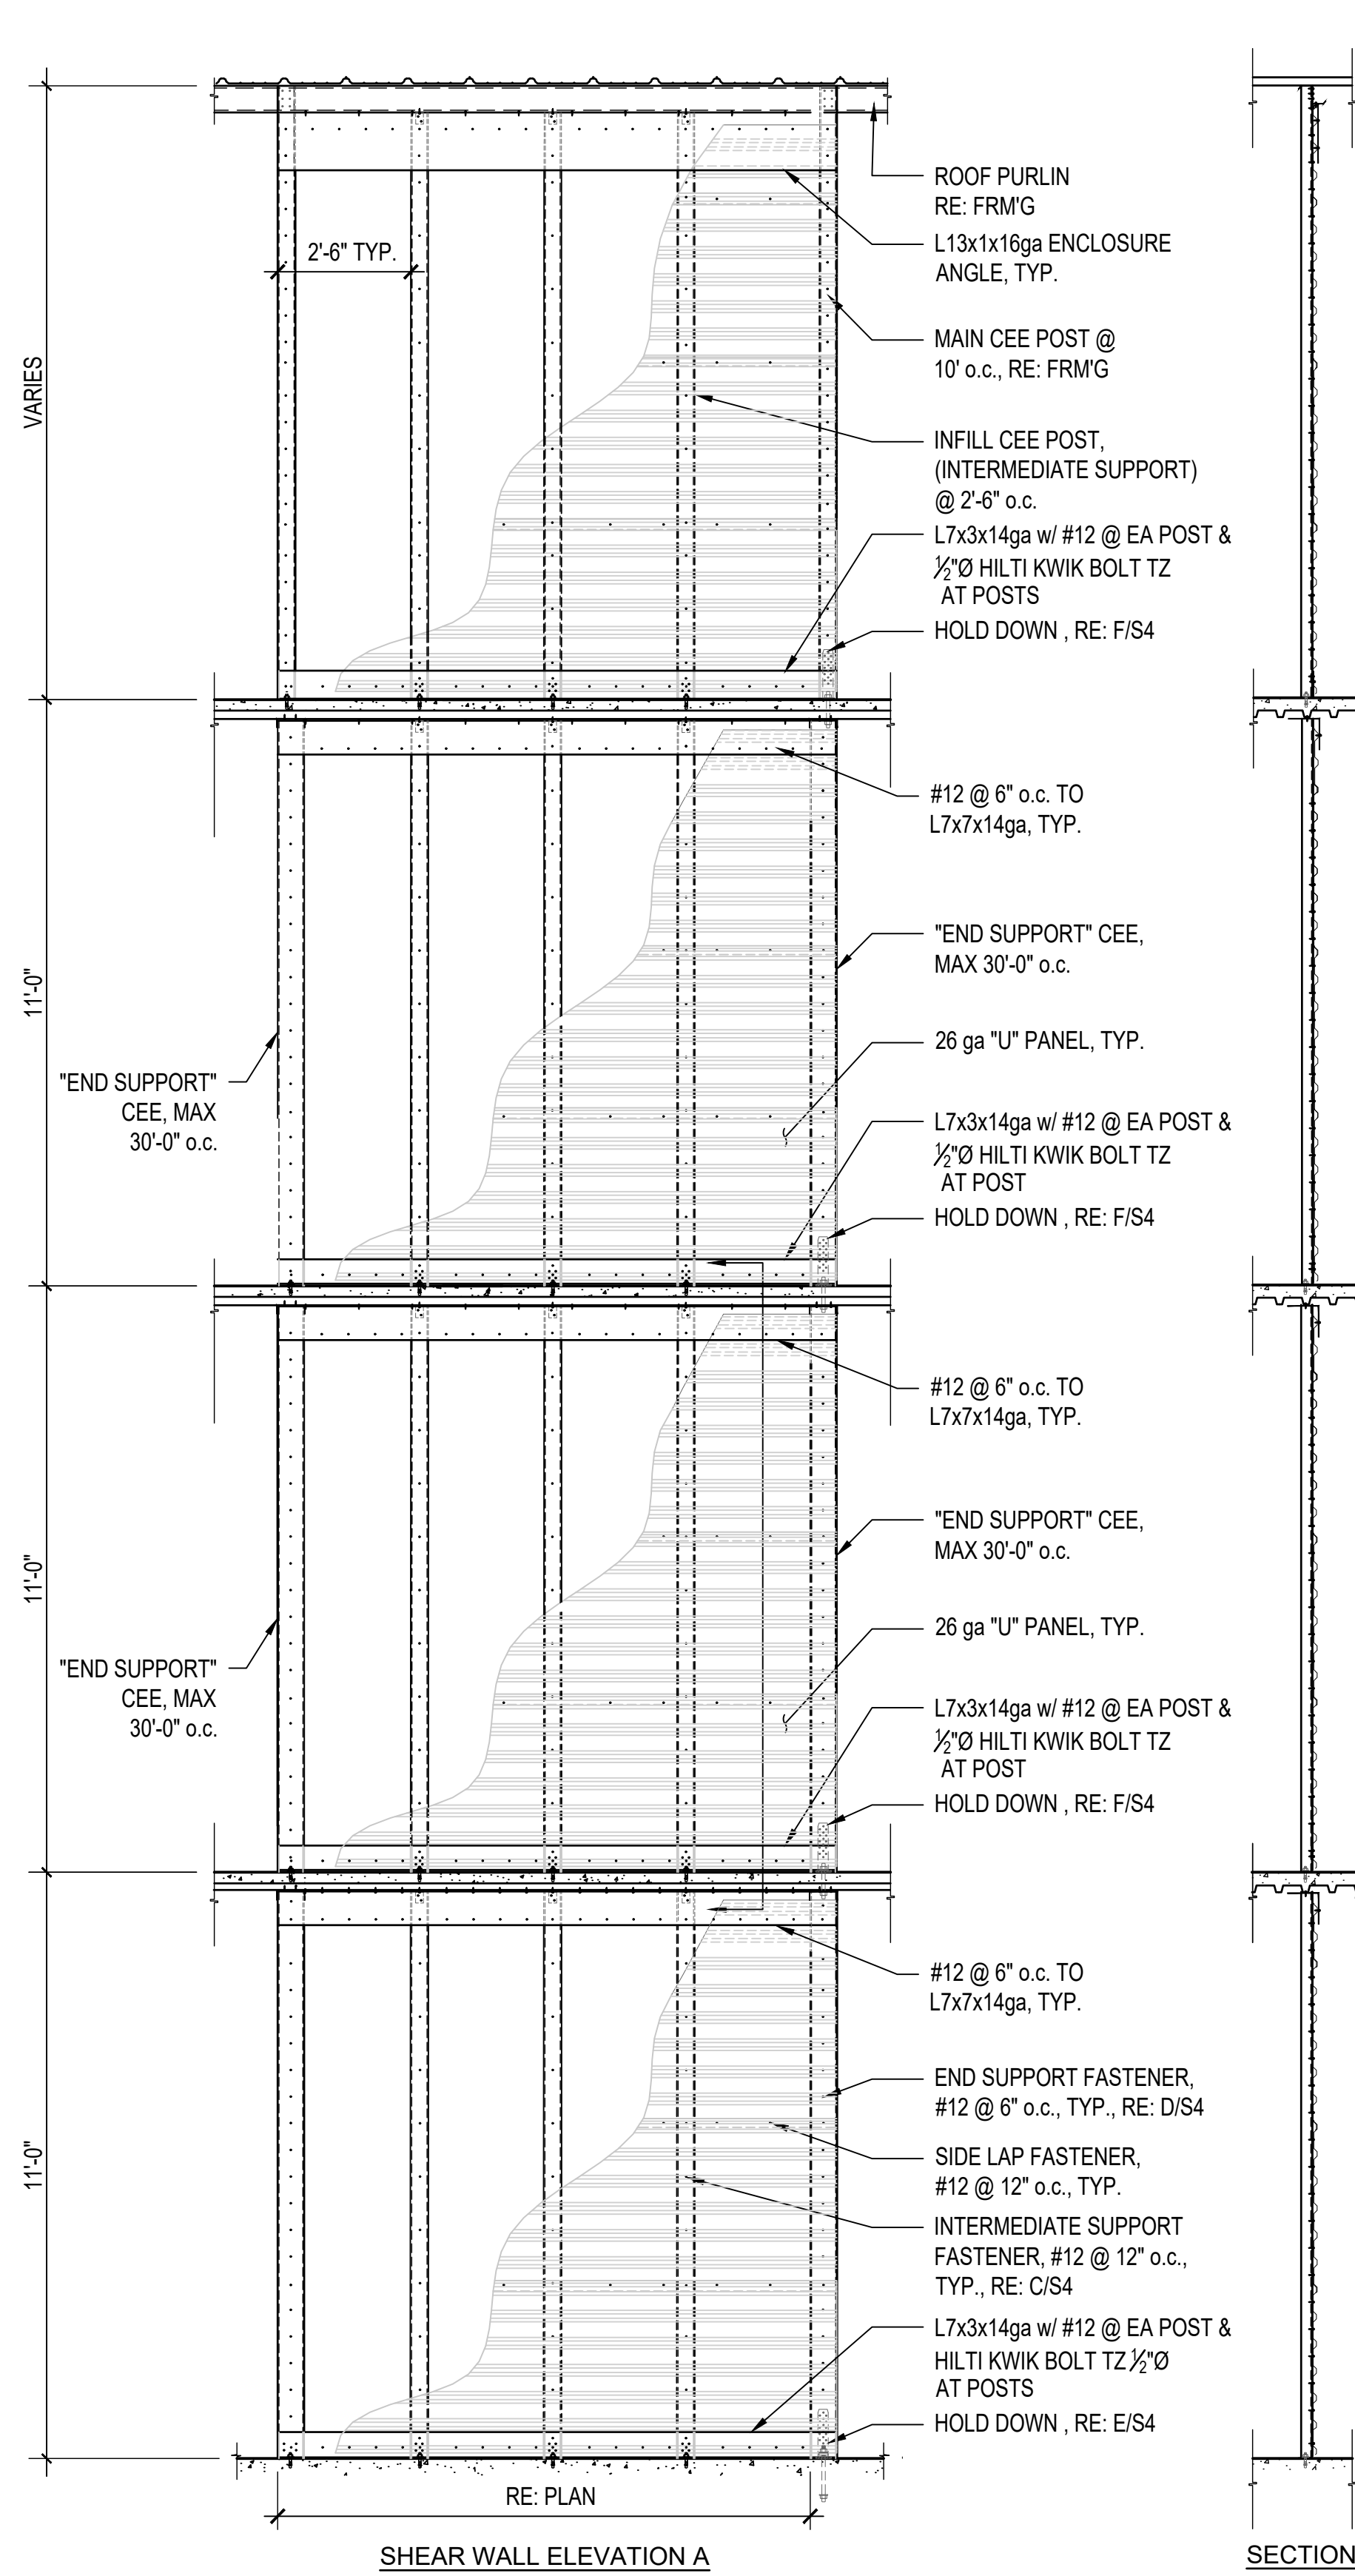


DETAIL A
SCALE: 3/8" = 1'-0"

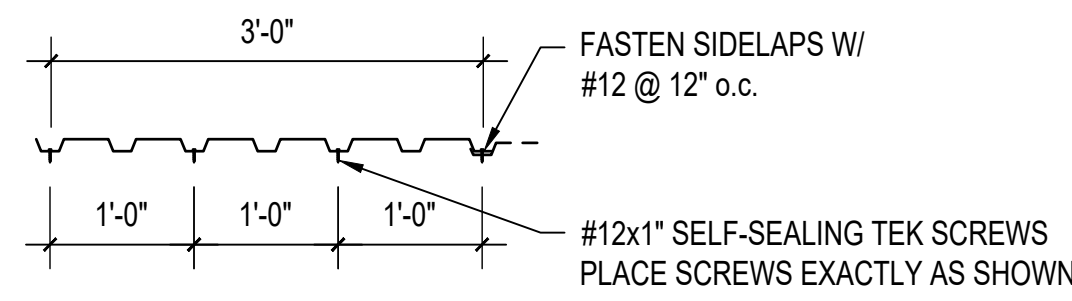


DETAIL C
SCALE: 3/4" = 1'-0"

SHEARWALL U-PANEL ATTACHMENT
PATTERN @ INTERMEDIATE SUPPORT

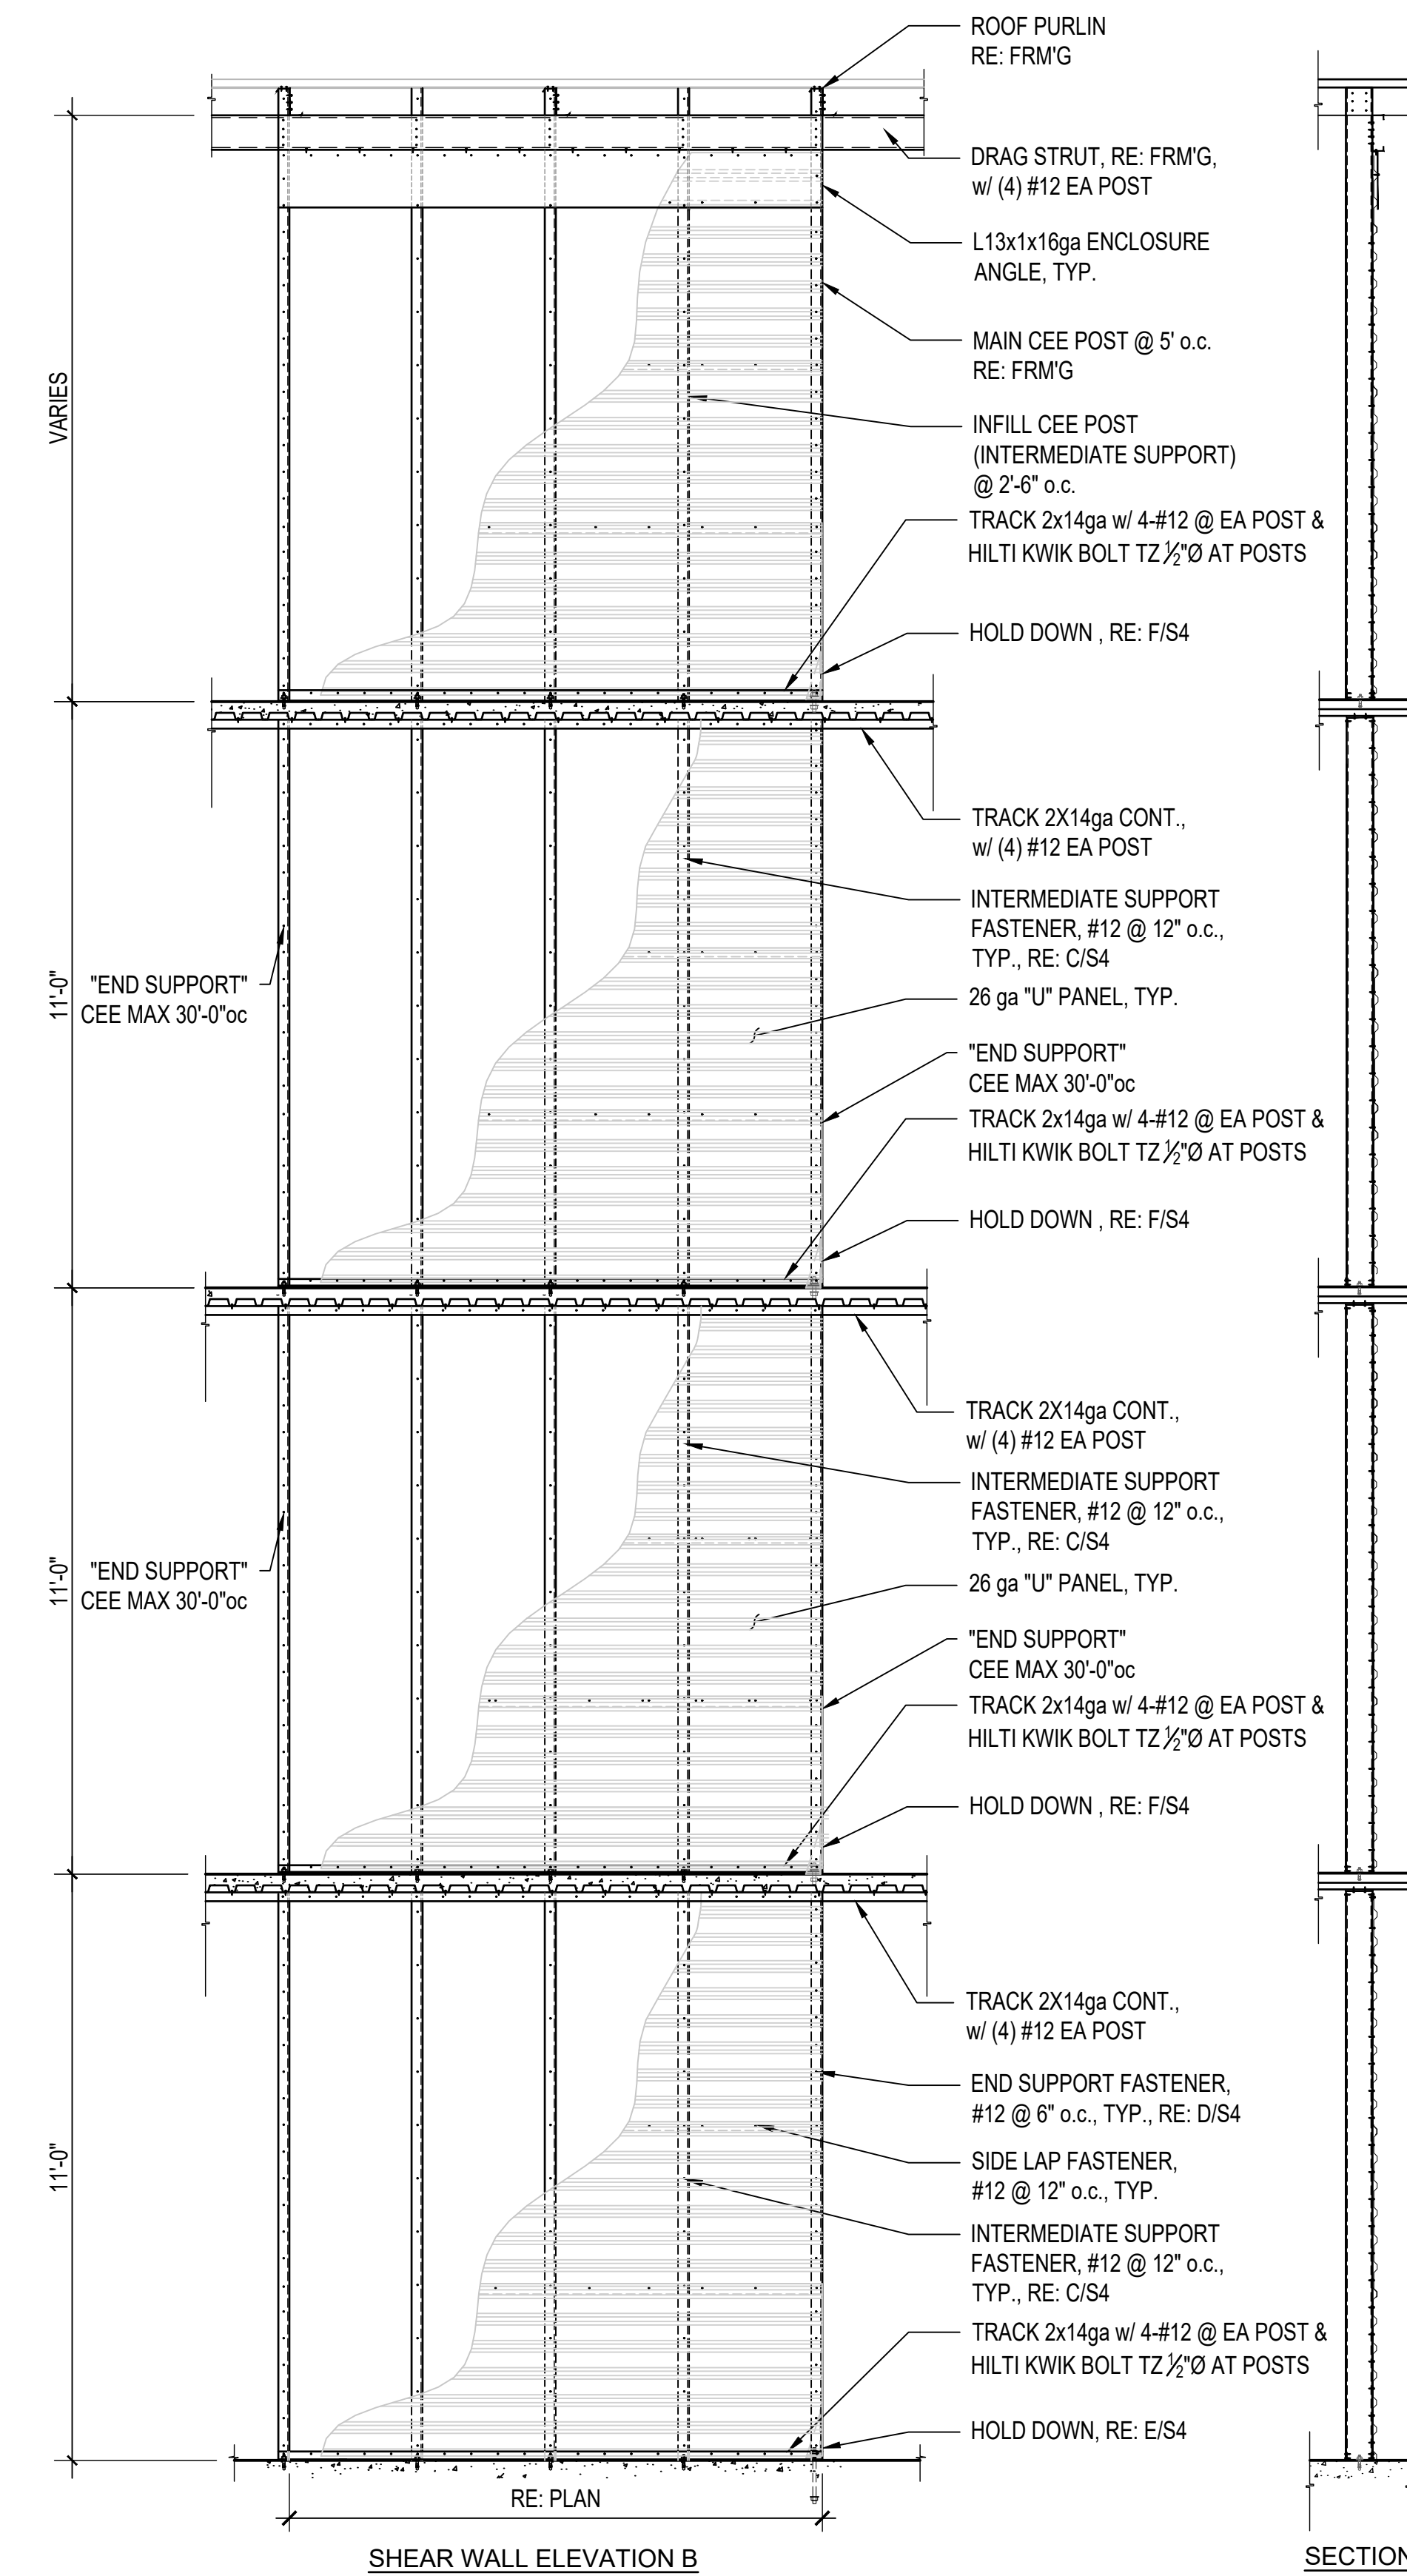


DETAIL B
SCALE: 3/8" = 1'-0"

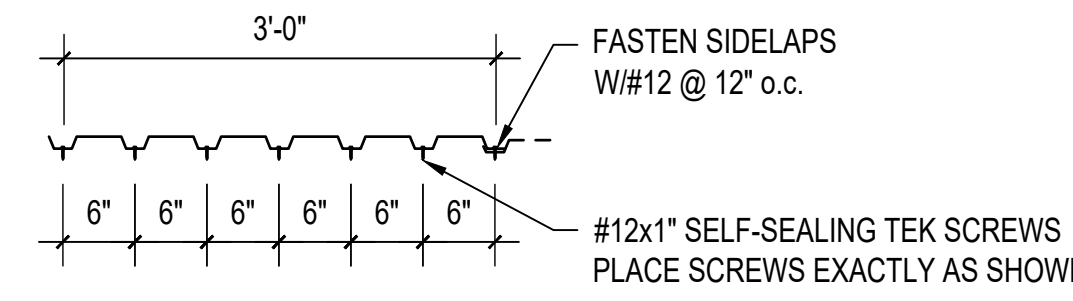


DETAIL D
SCALE: 3/4" = 1'-0"

SHEARWALL U-PANEL ATTACHMENT
PATTERN @ END SUPPORT

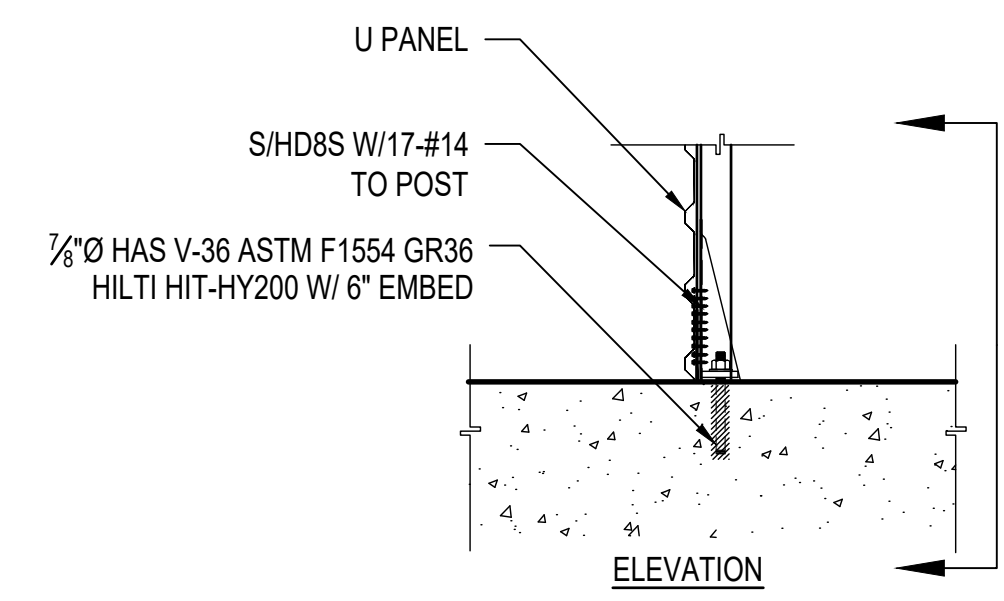


HOLD DOWN DETAIL

DETAIL E
SCALE: 3/4" = 1'-0"

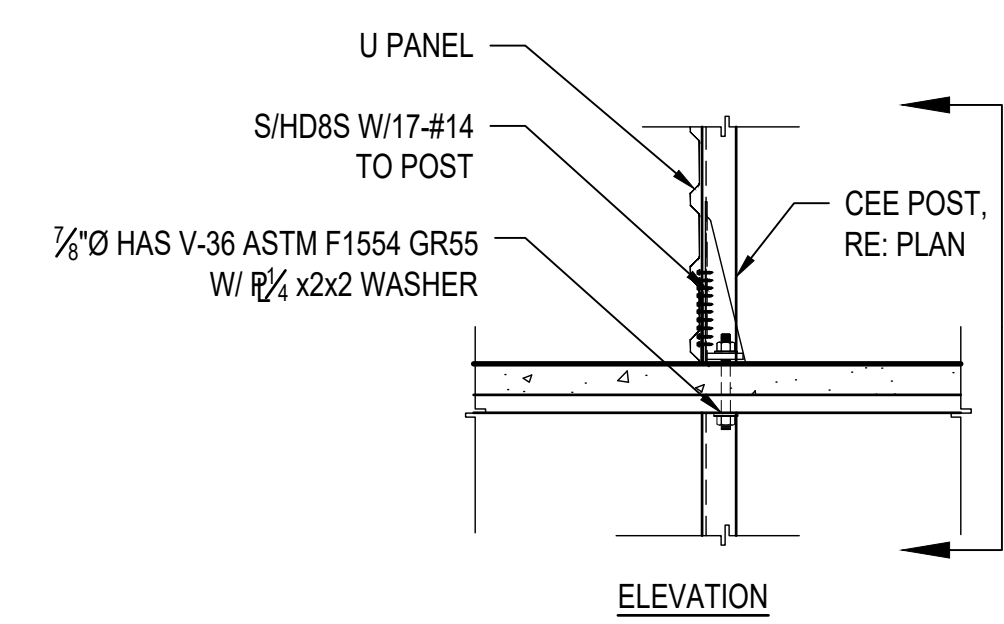


HOLD DOWN DETAIL

DETAIL F
SCALE: 3/4" = 1'-0"

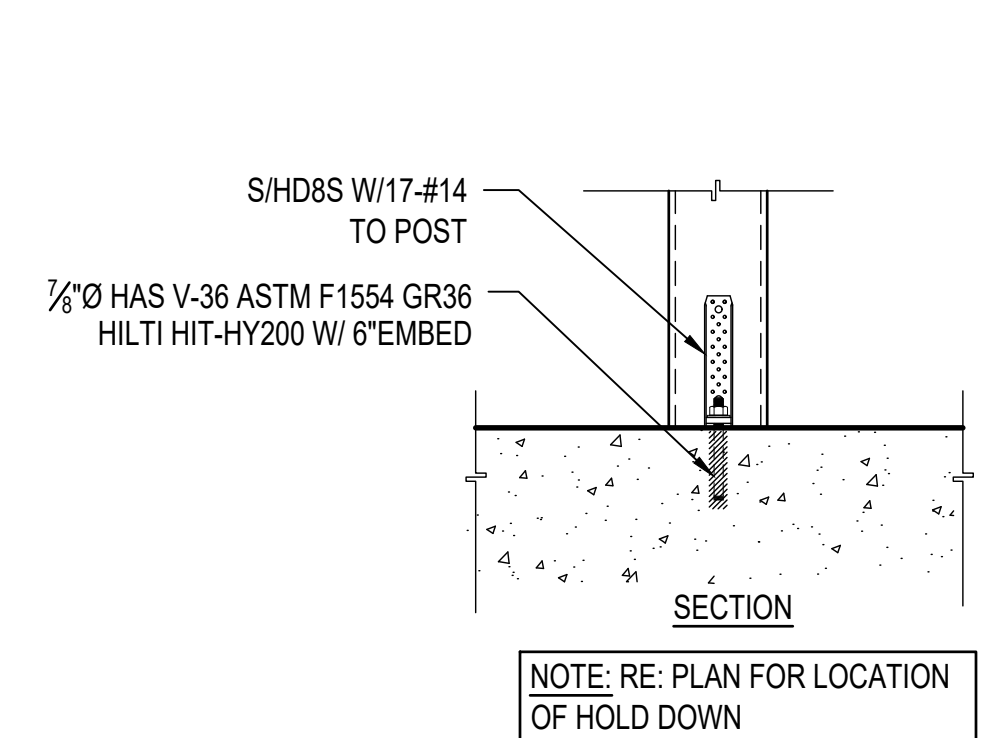

HOLD DOWN DETAIL

DETAIL E
SCALE: 3/4" = 1'-0"

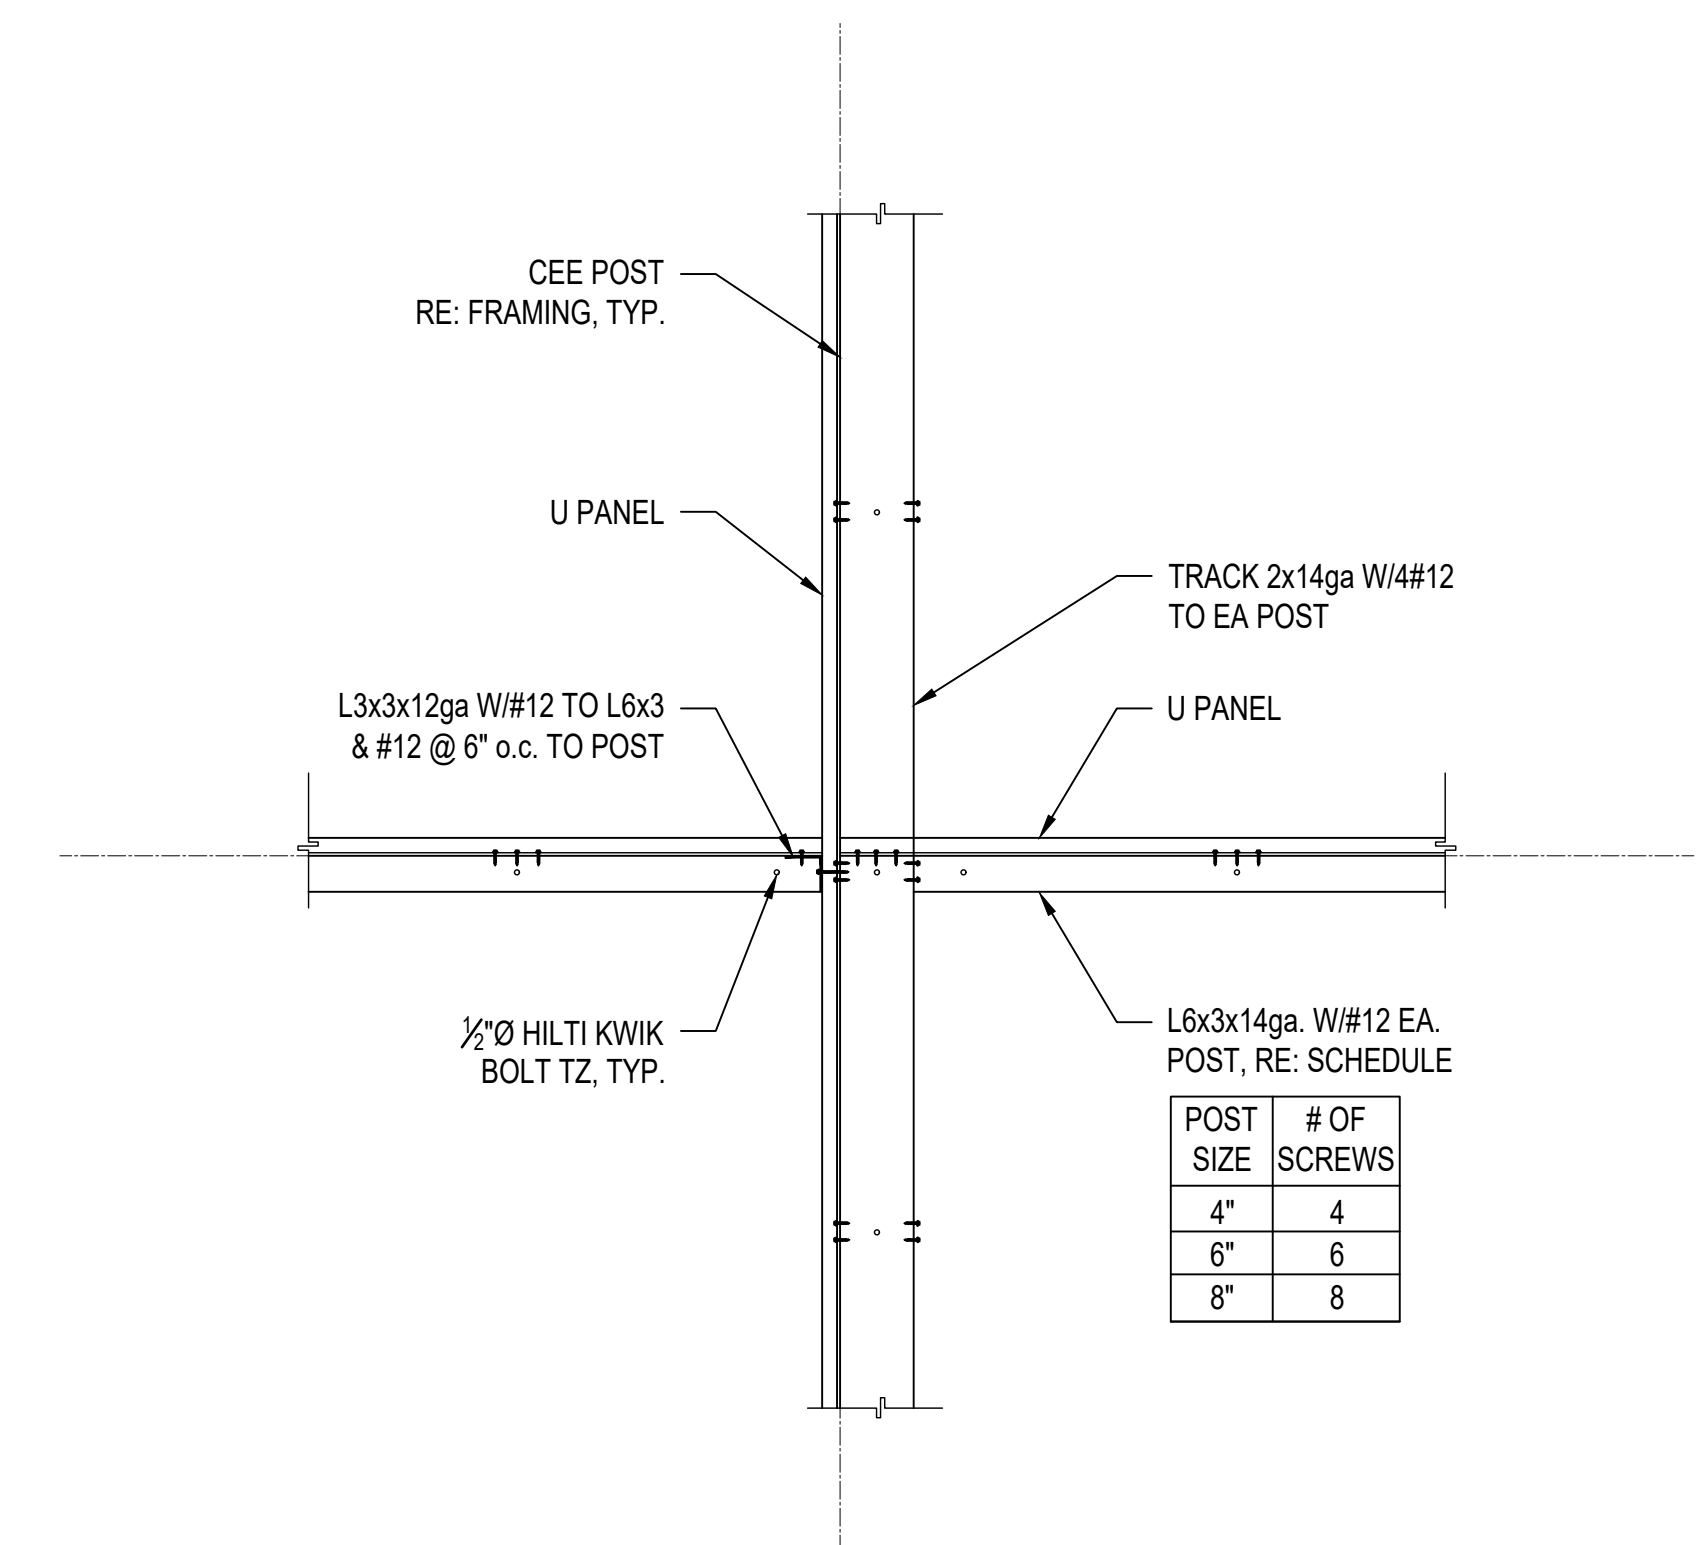

SHEARWALL INTERSECTION DETAIL

DETAIL G
SCALE: 3/4" = 1'-0"

BK SMITH
ENGINEERING CO., INC.
1916 CITIZENS BANK DRIVE
BOSSIER CITY, LOUISIANA
318-741-0127
TX FIRM #22371

ISSUE	DATE
No.	DATE
	DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group

ARCHITECTURE
9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co

SHEET TITLE
SHEARWALL ELEVATIONS
AND DETAILS

SHEET NUMBER

S4
OF SHEETS

ISSUED FOR PERMIT

ISSUE		DATE
No.	DATE	DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP

MAGNOLIA VILLAGE STORAGE

38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group

ARCHITECTURE

9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co


SHEET TITLE

SHEARWALL PLAN

SHEET NUMBER

S4.1

OF SHEETS

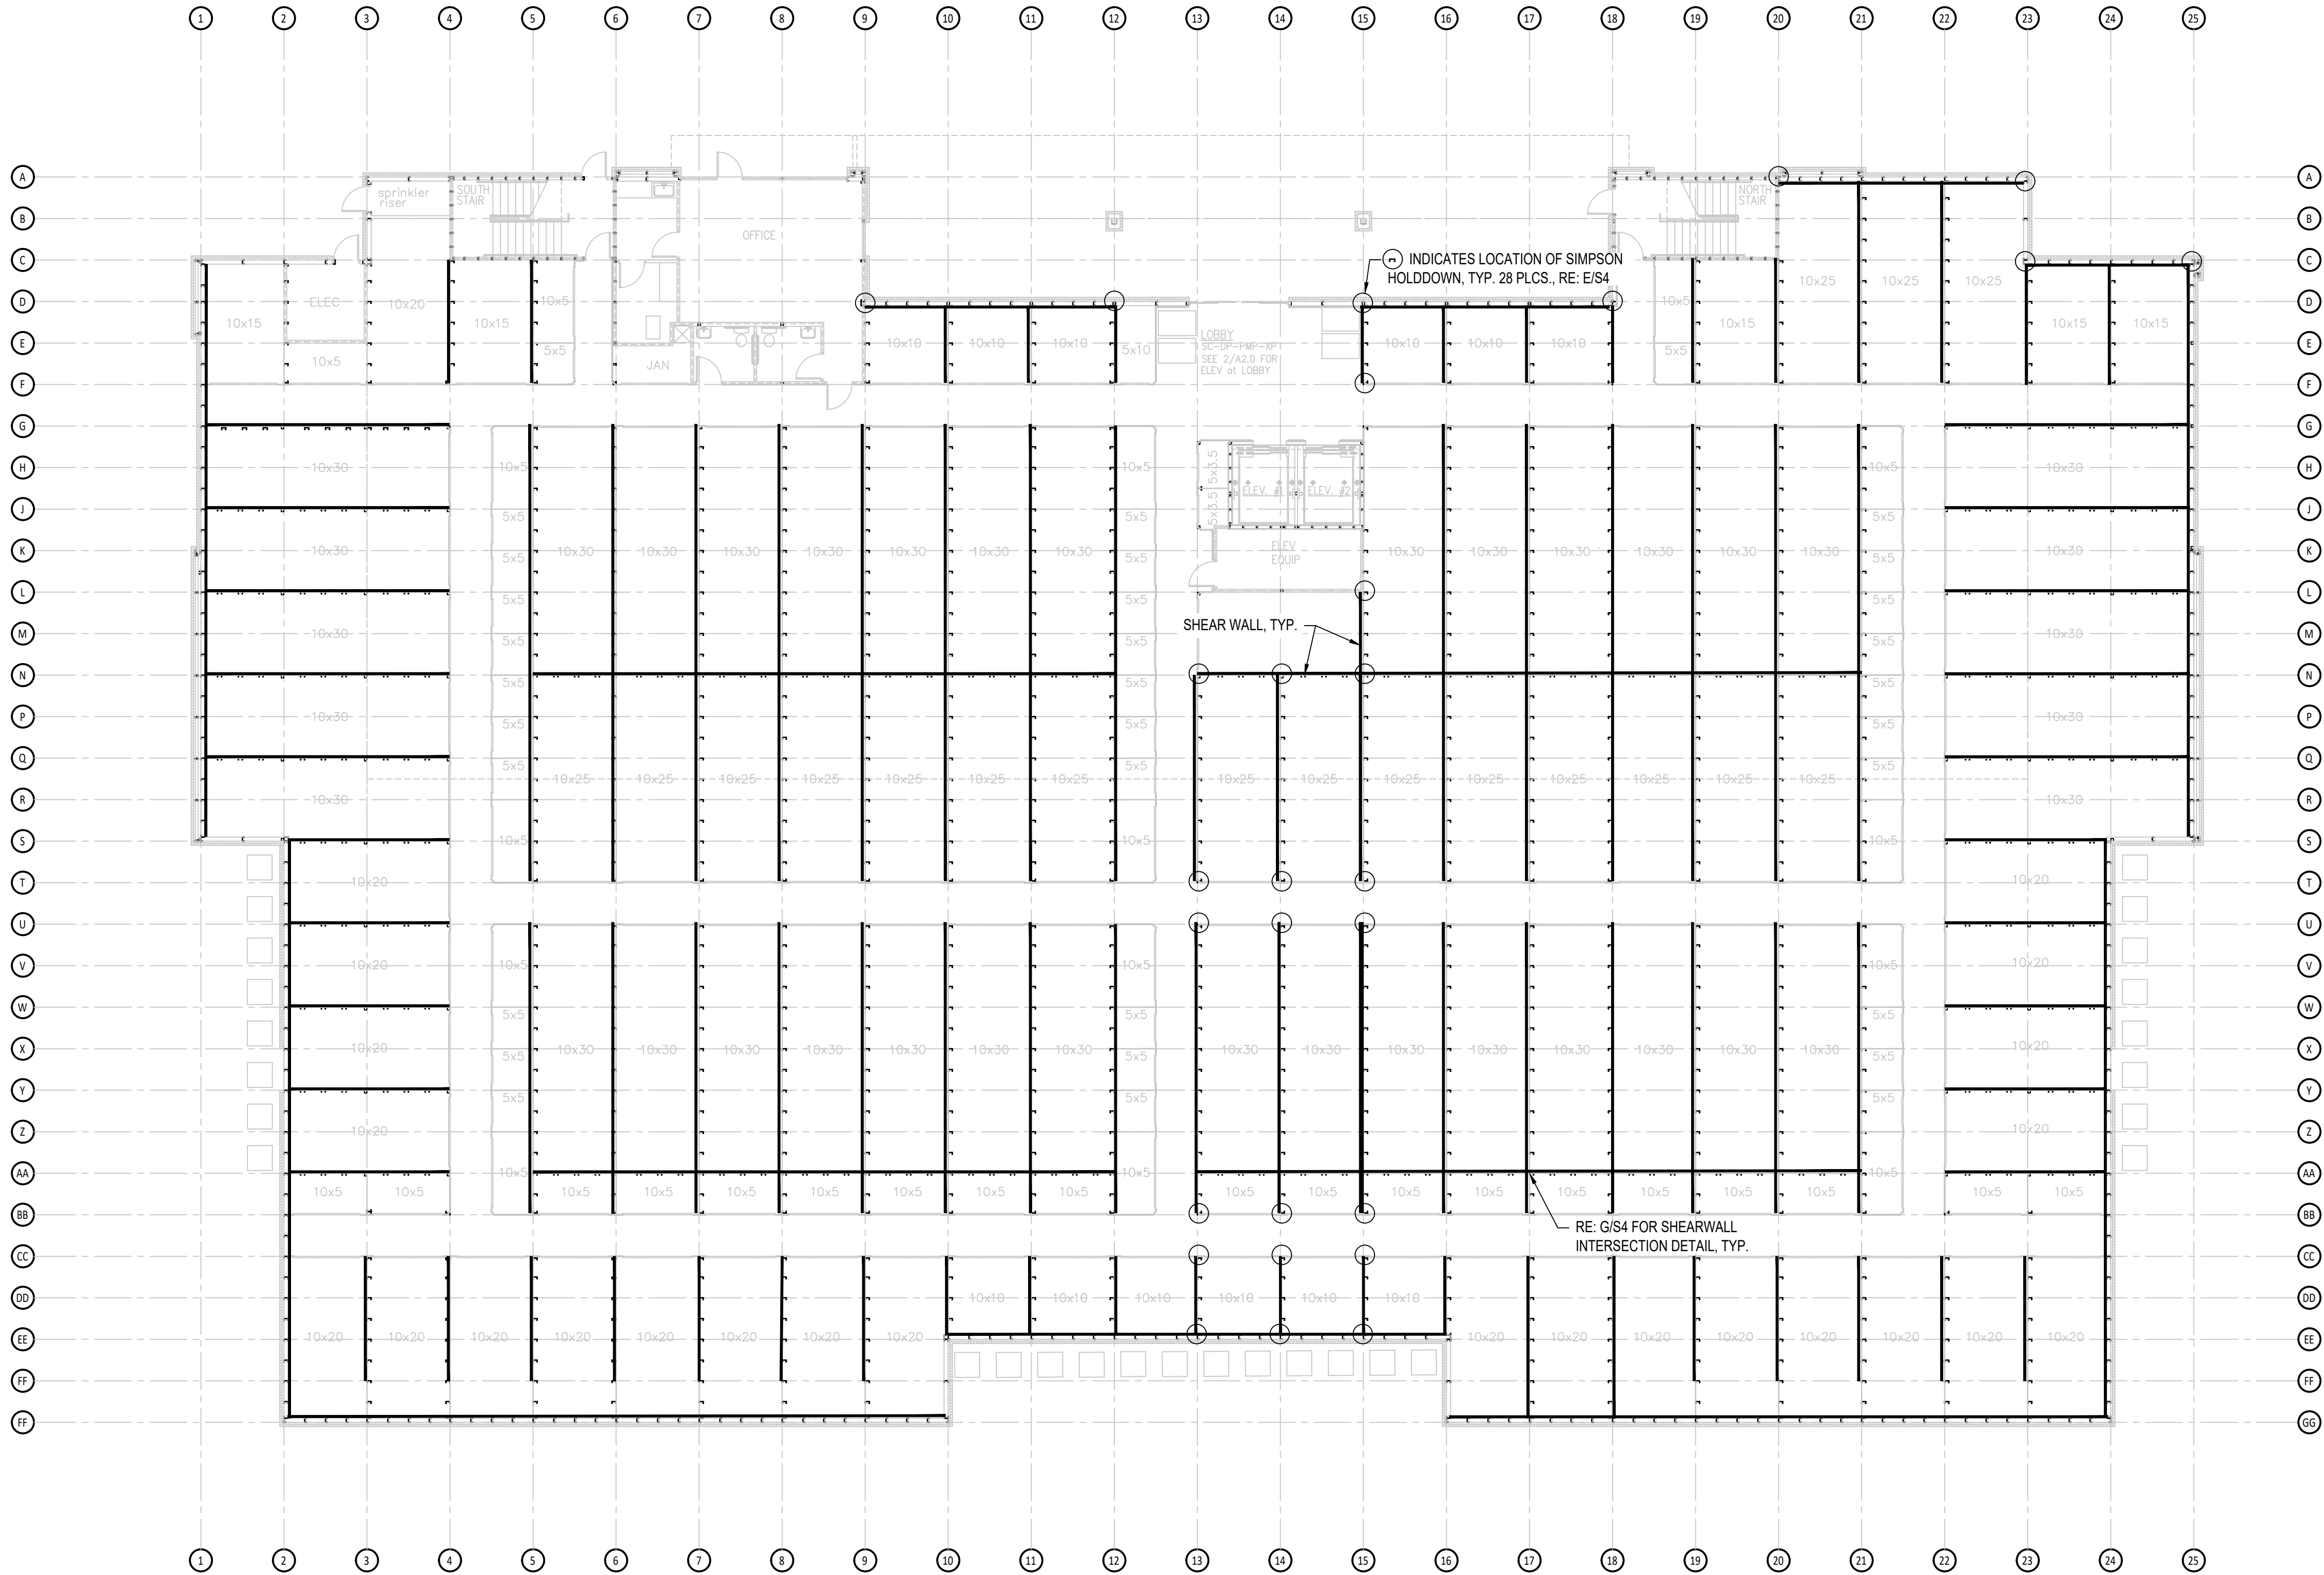



MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group

ARCHITECTURE


415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
ally@kgdinc.co

SHEET	TITLE
1	SHEARWALL PLAN

SHEET NUMBER

S4.2

OF SHEETS

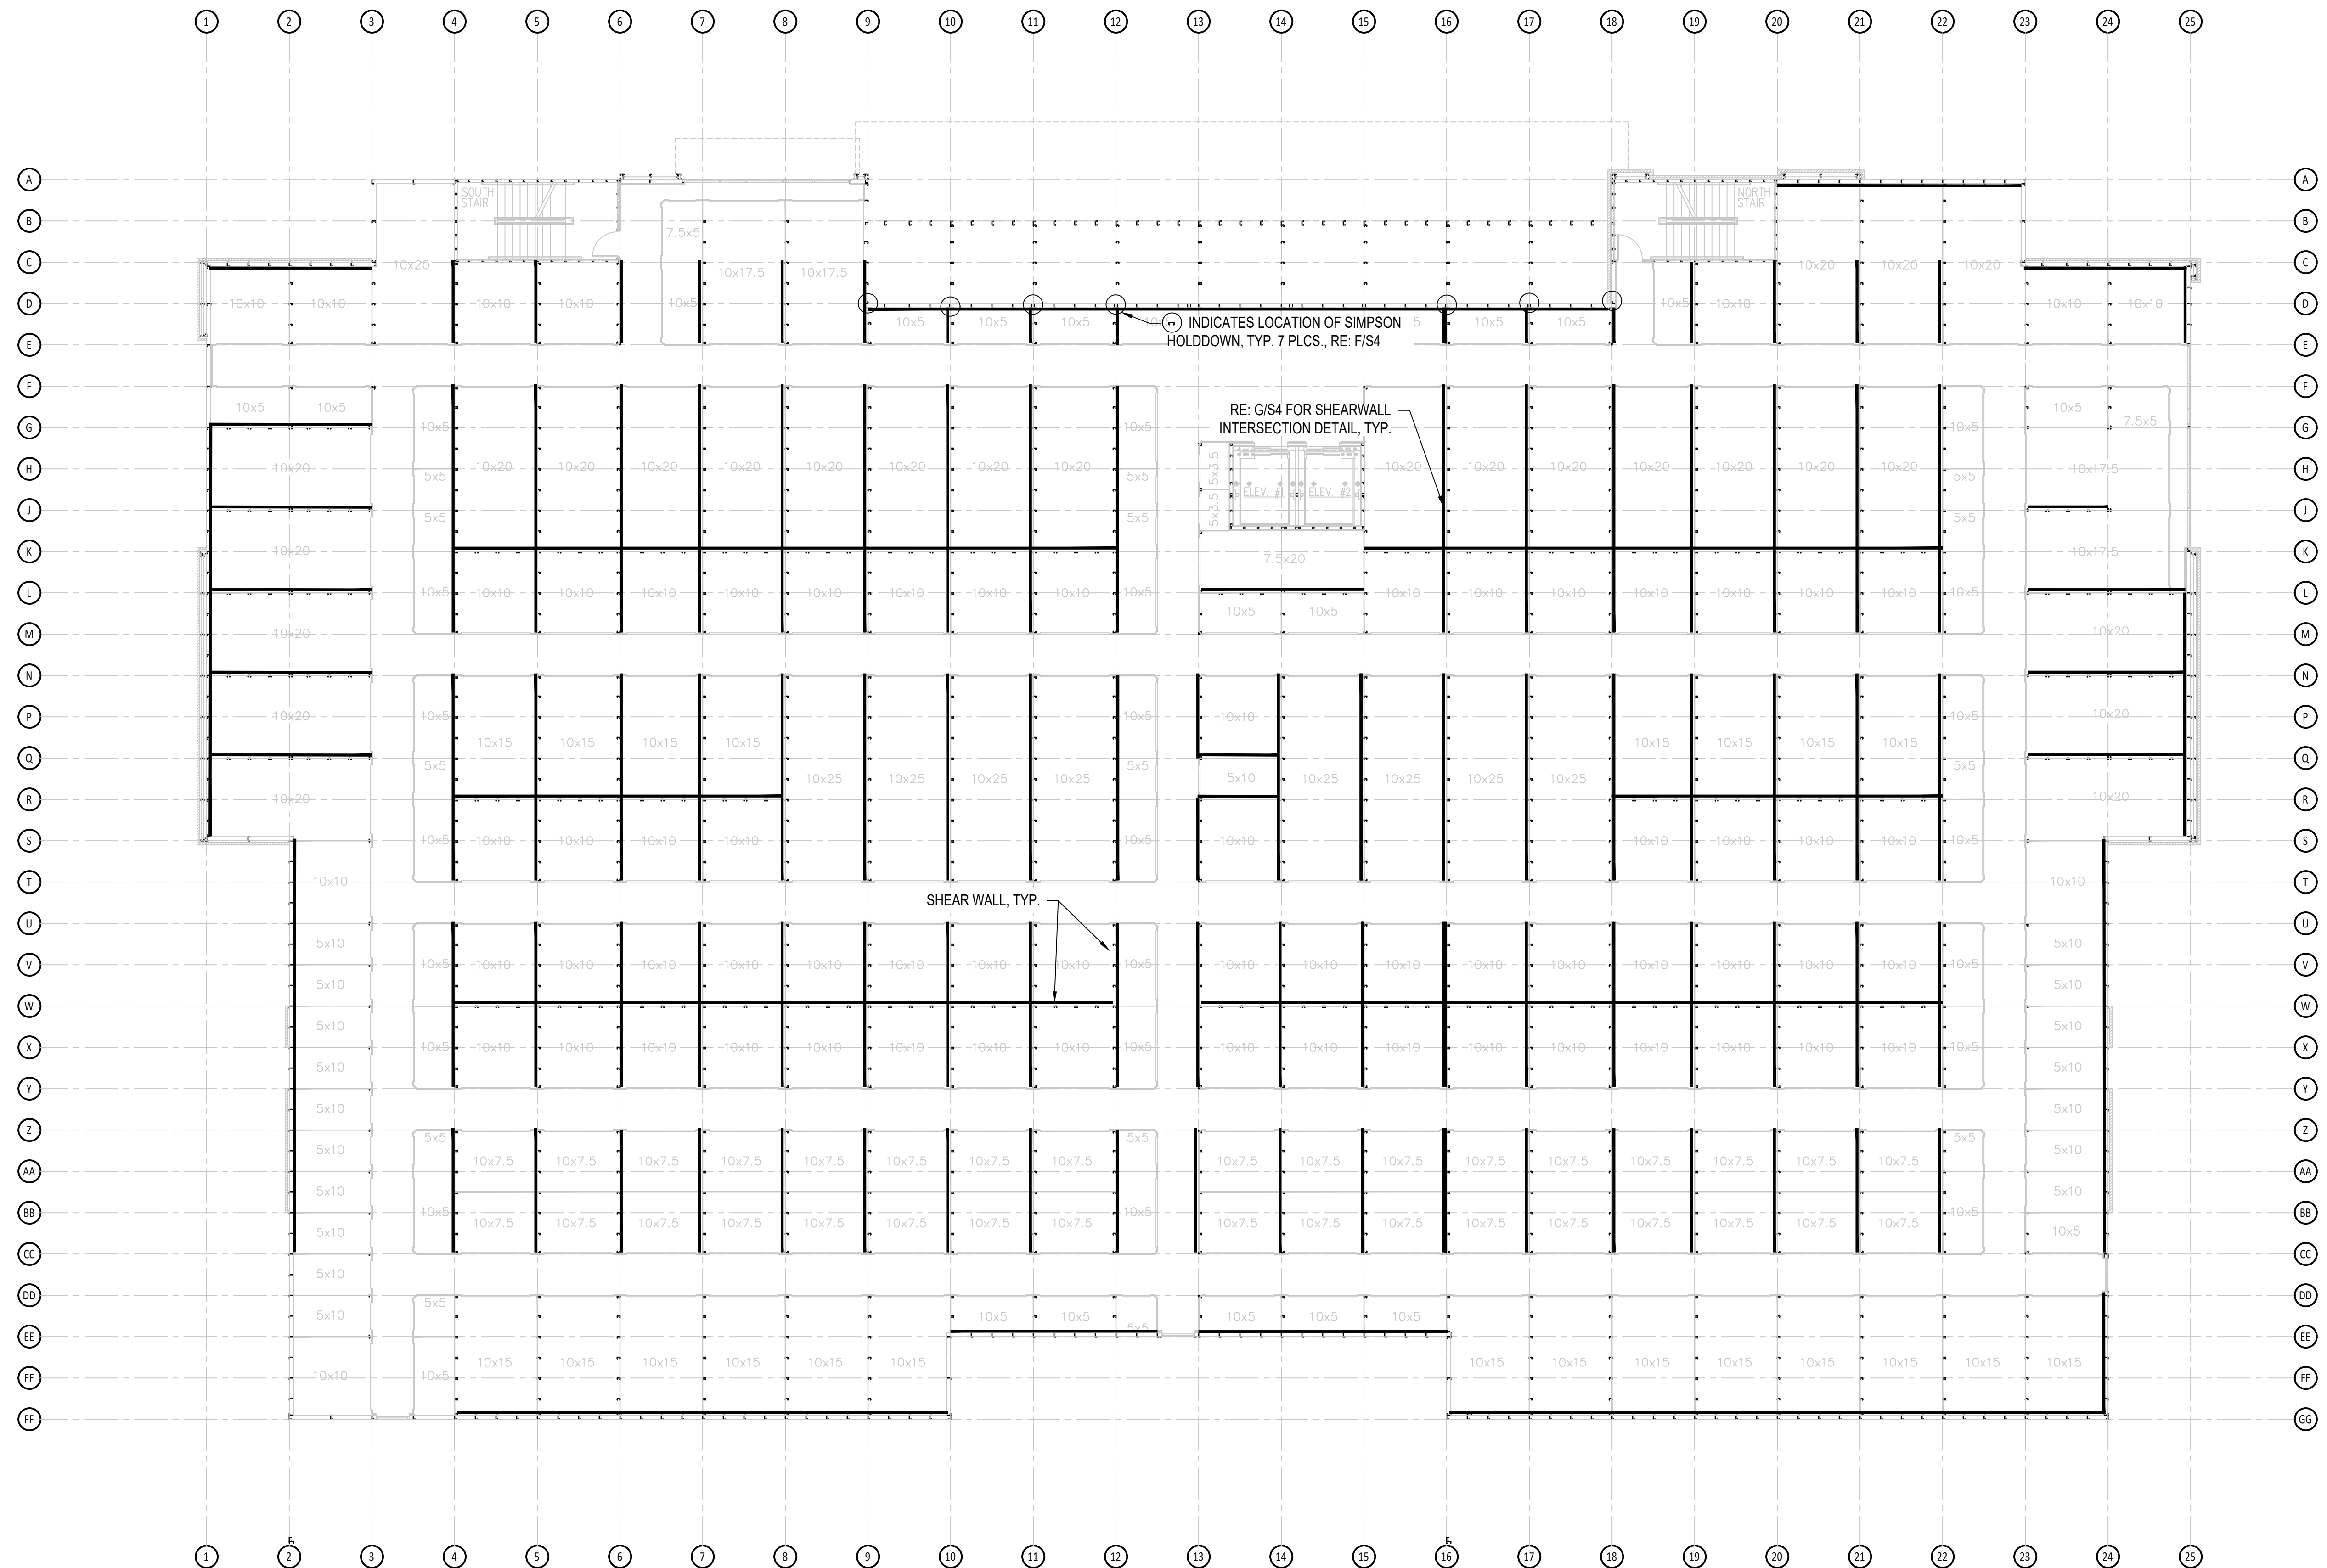


2ND FLOOR SHEARWALL PLAN

SCALE: 3/32" = 1'-0"

ISSUED FOR PERMIT

<u>SHEARWALL LEGEND</u>	
—	26ga. "U" PANEL SHEARWALL, RE: S4
⊗	LOCATION OF SIMPSON HOLDDOWN, RE:S4

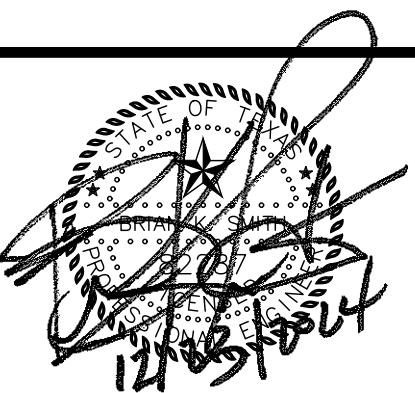

BK SMITH
ENGINEERING CO., INC.
1916 CITIZENS BANK DRIVE
BOSSIER CITY, LOUISIANA
318-741-0127
TX FIRM #22371

ISSUE		DATE
NO.	DATE	DESCRIPTION
	5/17/23	PER COMMENTS

MAGNOLIA VILLAGE INVESTMENTS LP

MAGNOLIA VILLAGE STORAGE

38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group

ARCHITECTURE

9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co

SHEET

TITLE
SHEARWALL PLAN

SHEET


NUMBER

S4.3

OF

SHEETS

ISSUED FOR PERMIT

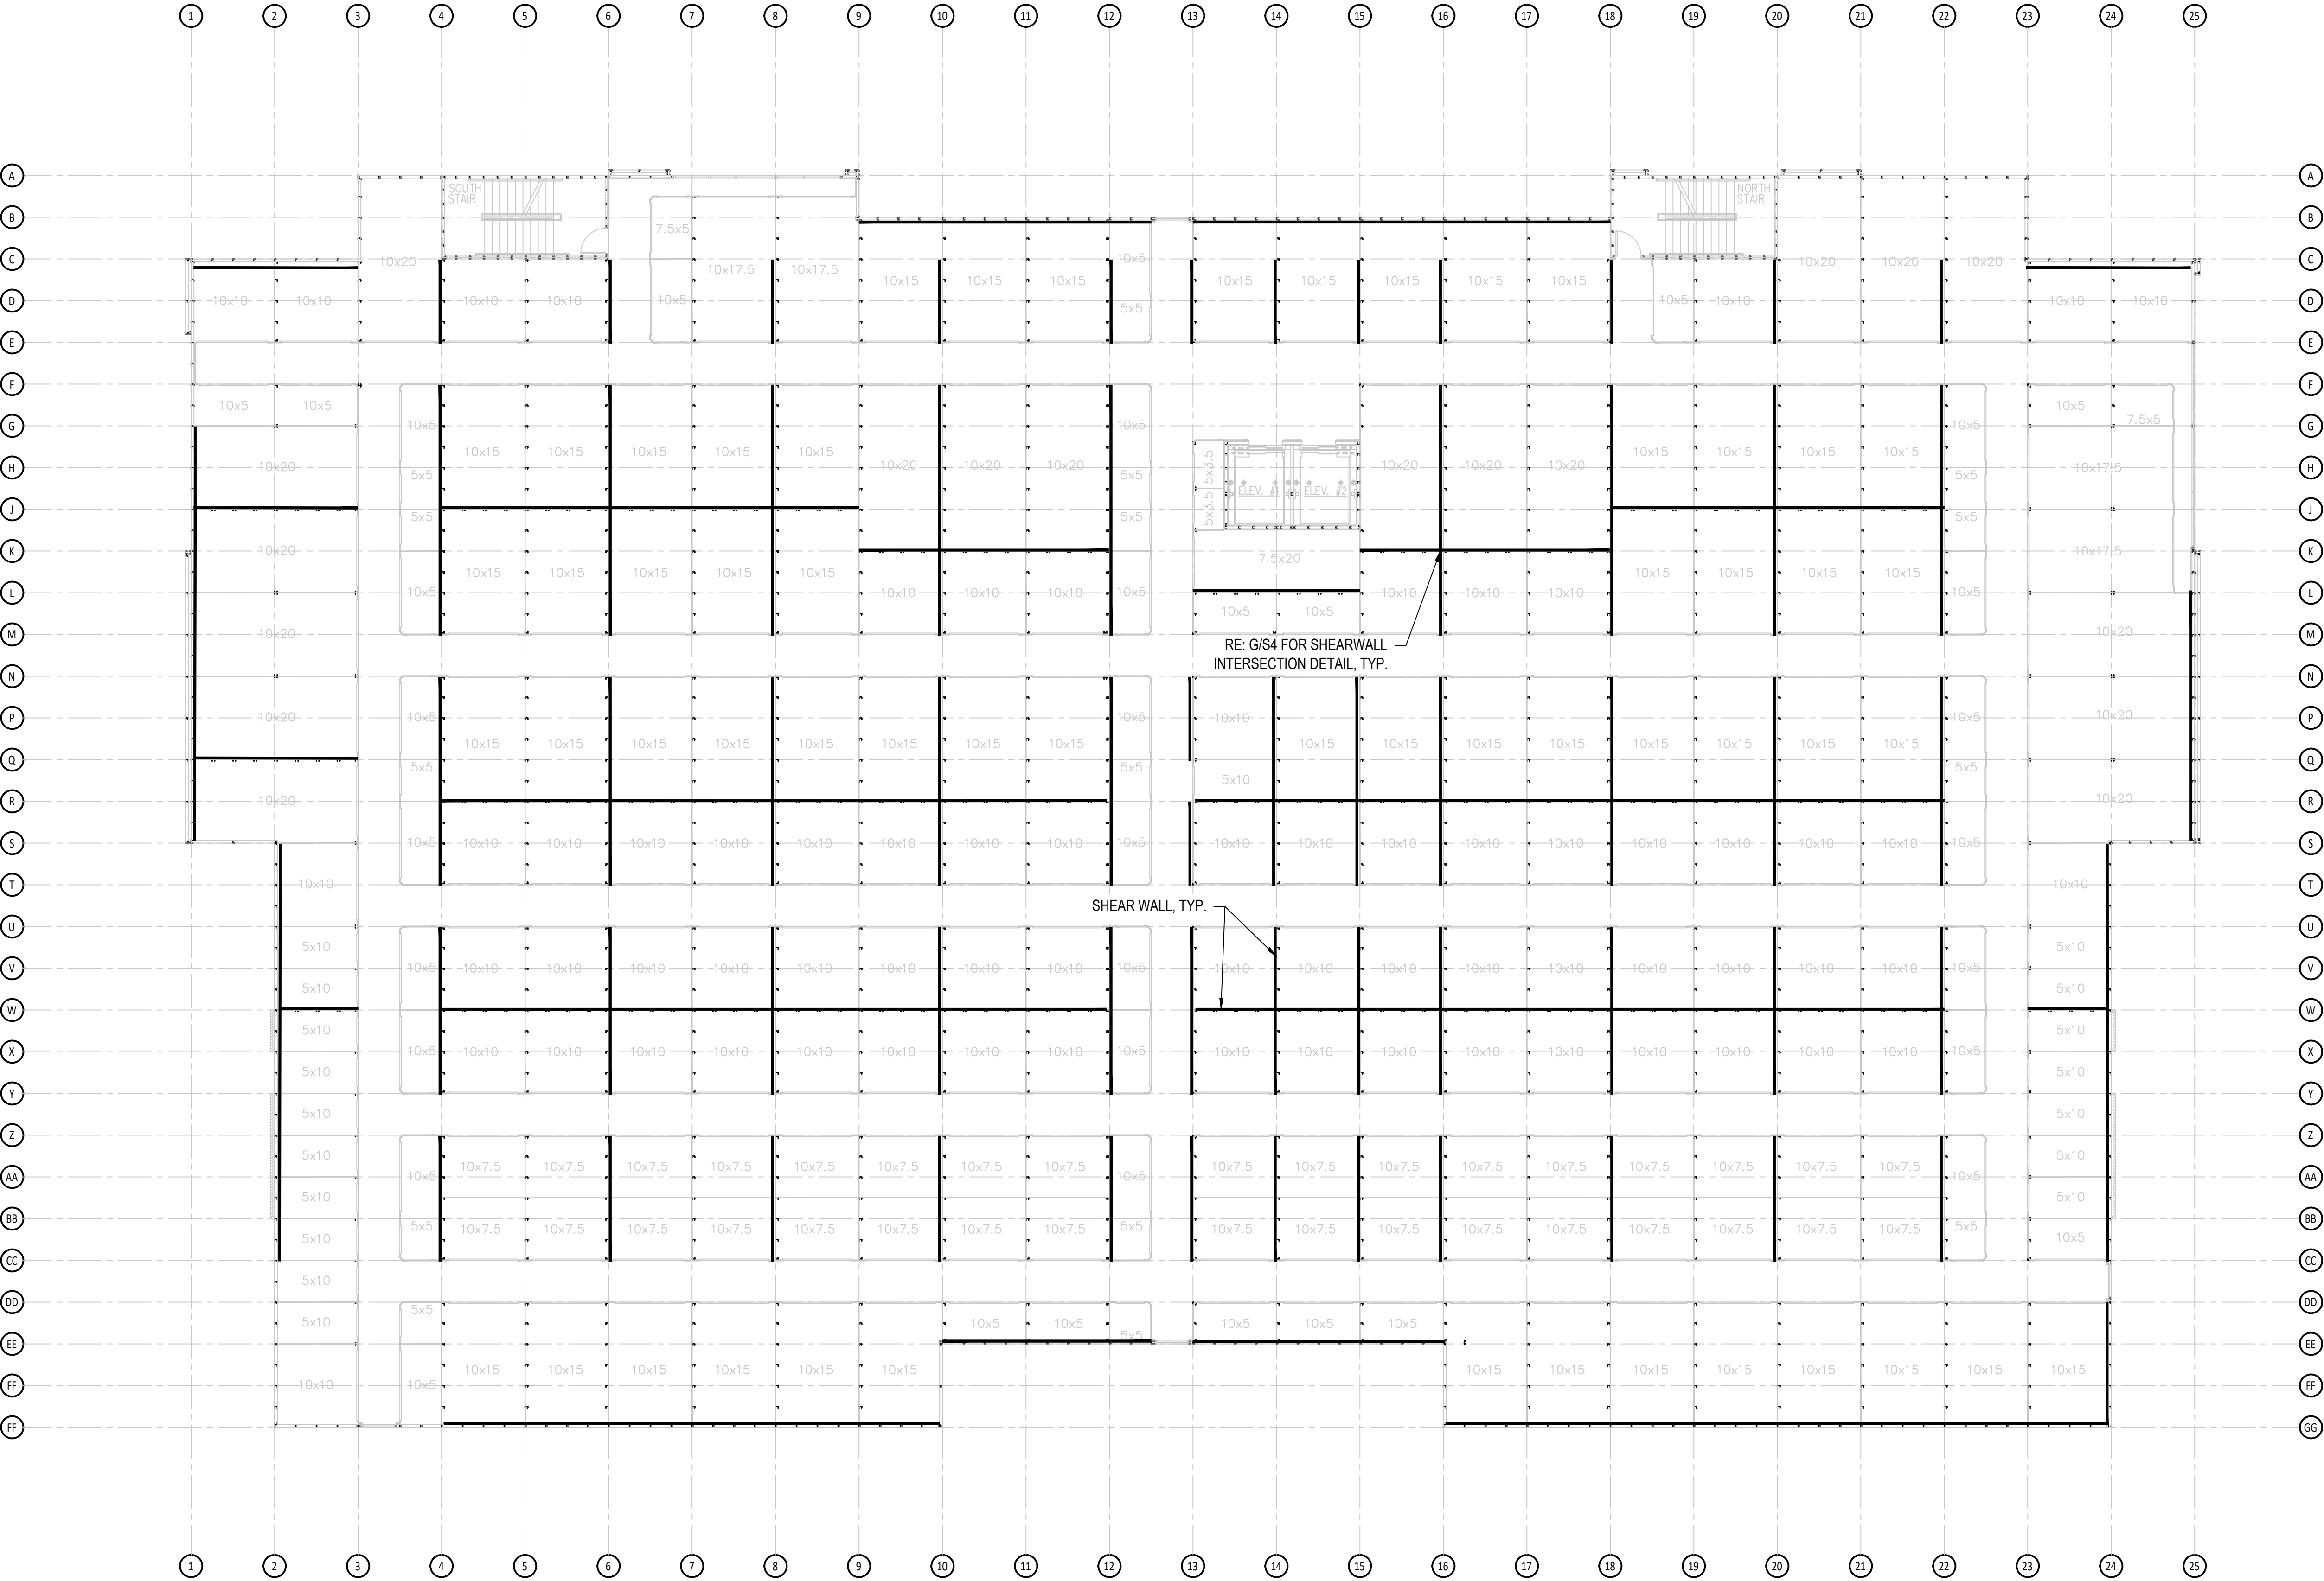

3RD FLOOR SHEARWALL PLAN

SCALE: 3/32" = 1'-0"

SHEARWALL LEGEND

— 26ga. "U" PANEL SHEARWALL, RE: S4

⊗ LOCATION OF SIMPSON HOLDDOWN, RE: S4

ISSUE		DATE
NO.	DATE	DESCRIPTION
	5/17/23	PER COMMENTS

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group


ARCHITECTURE

9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co

SHEET TITLE
SHEARWALL PLAN

SHEET NUMBER














S4.4
OF SHEETS

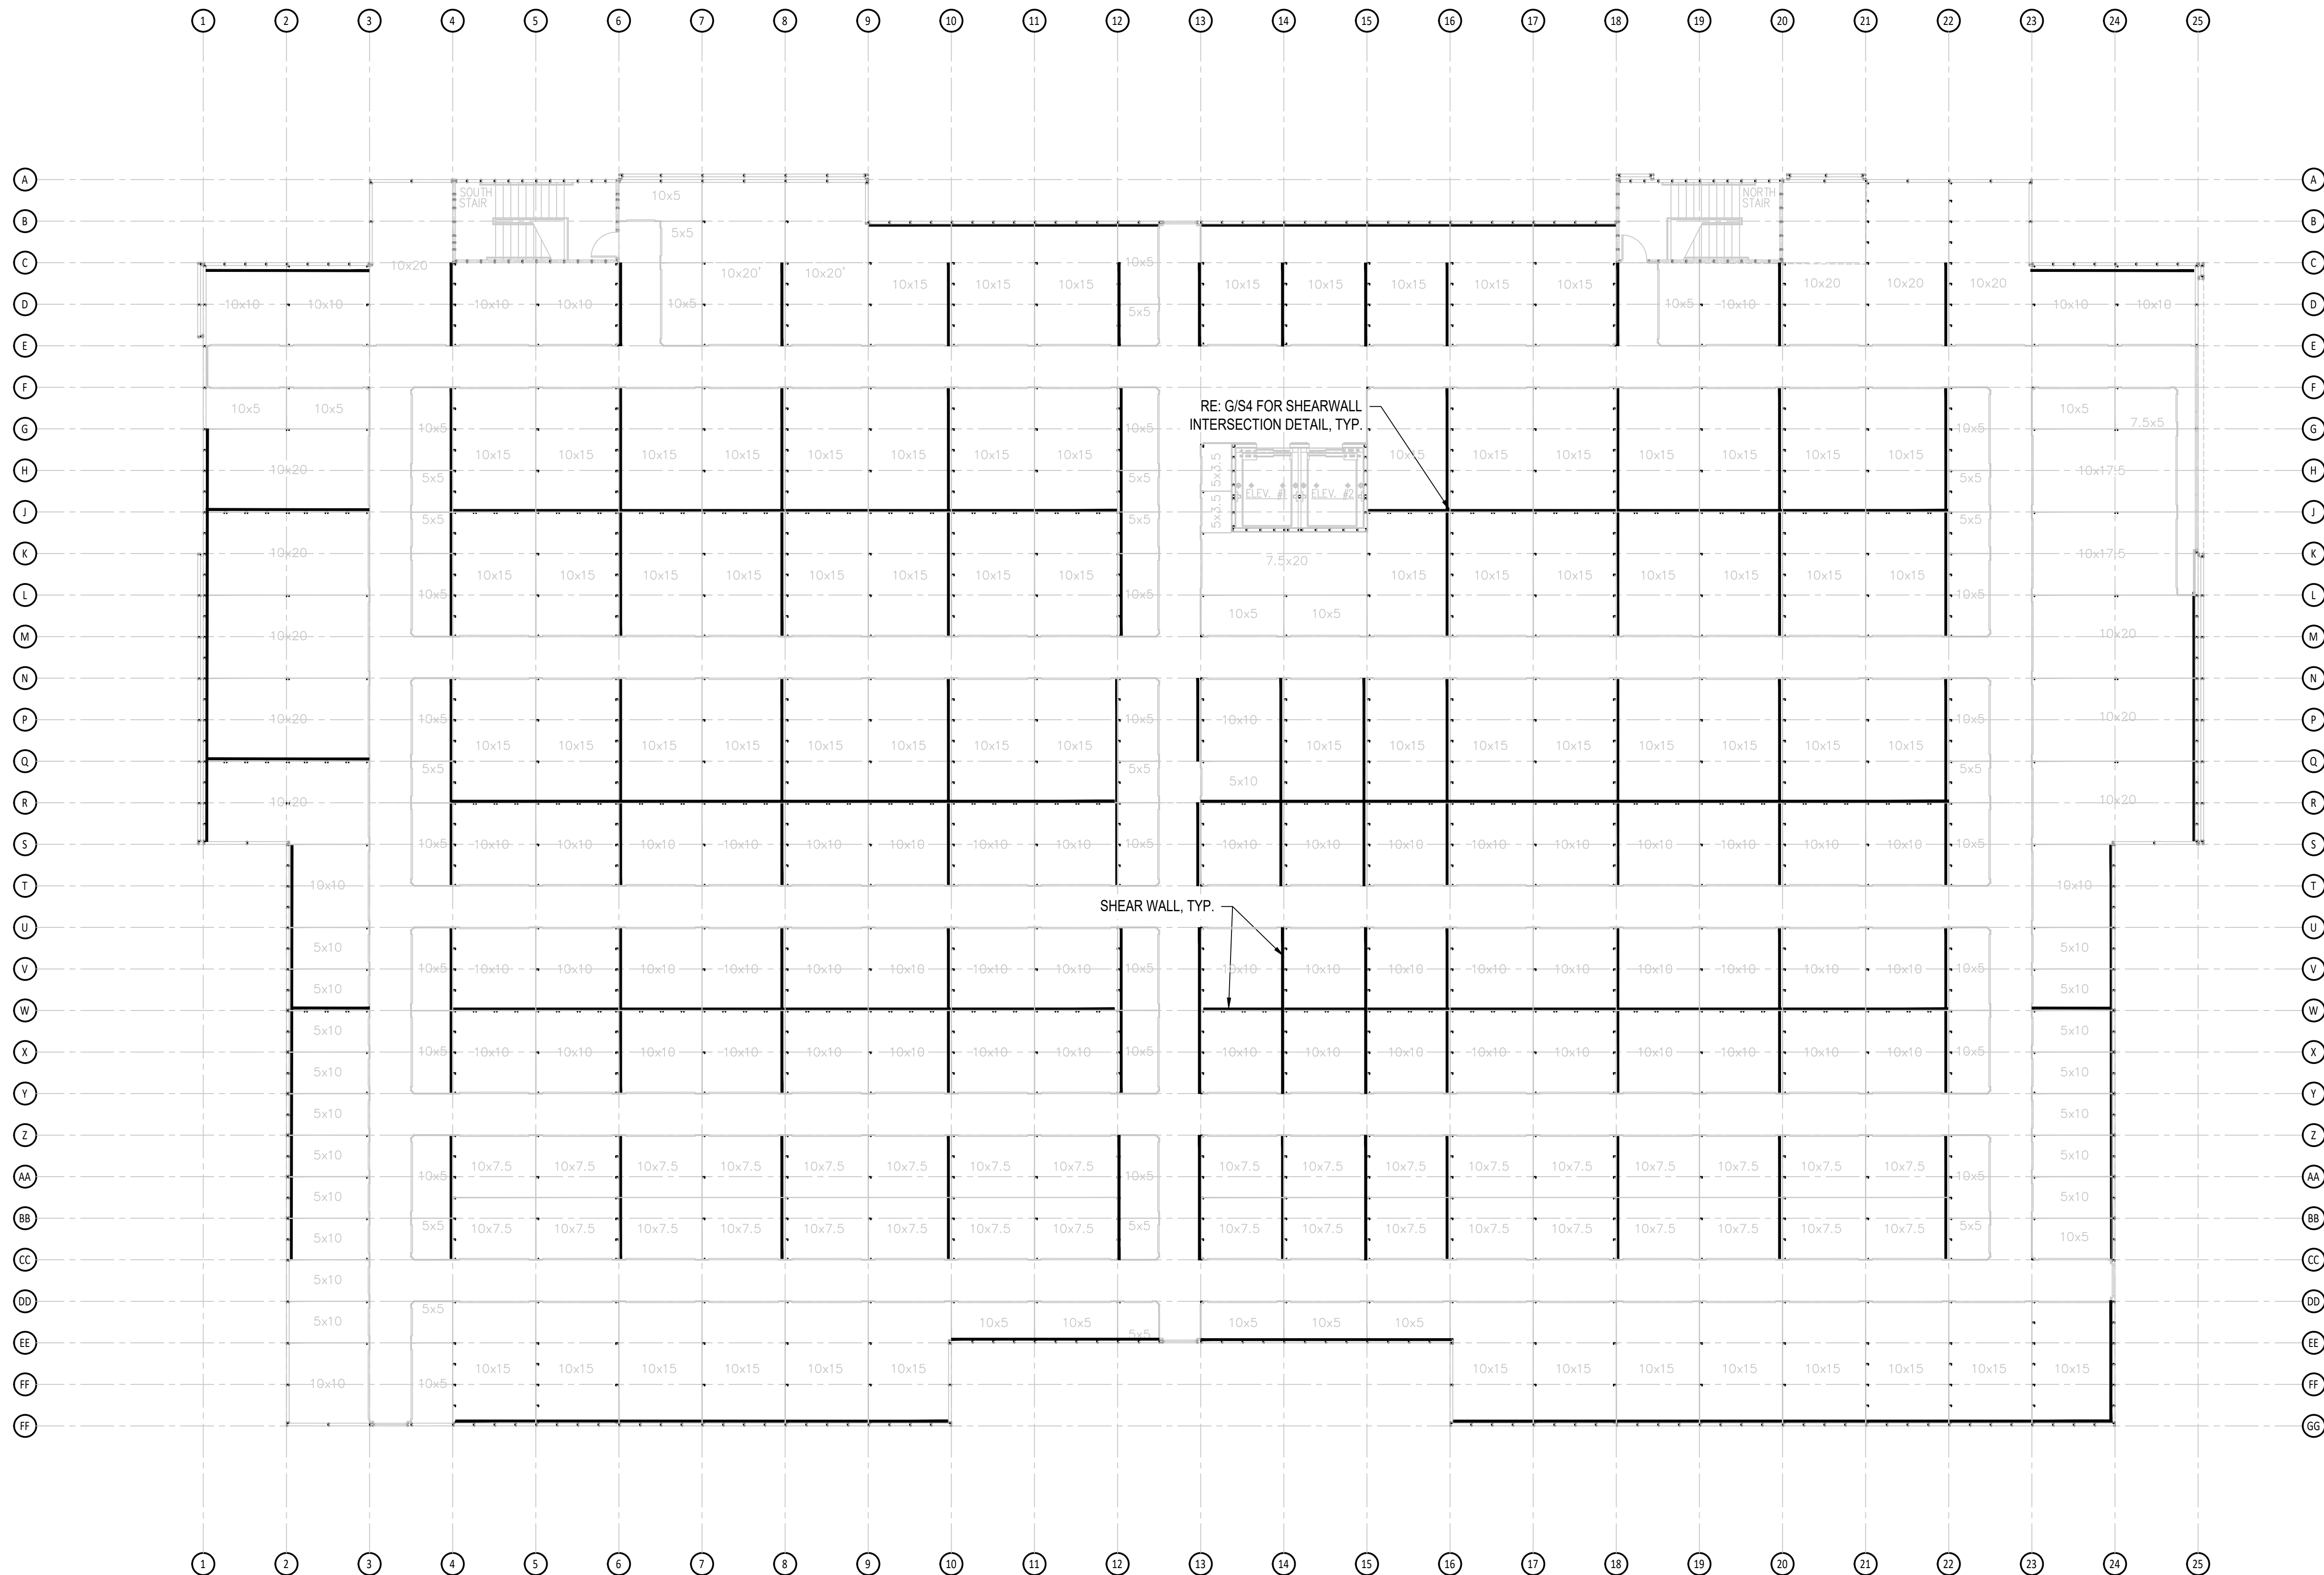

4TH FLOOR SHEARWALL PLAN
SCALE: 3/32" = 1'-0"

SHEARWALL LEGEND	
— 26ga. "U" PANEL SHEARWALL, RE: S4	
⊗ LOCATION OF SIMPSON HOLDDOWN, RE: S4	

ISSUED FOR PERMIT

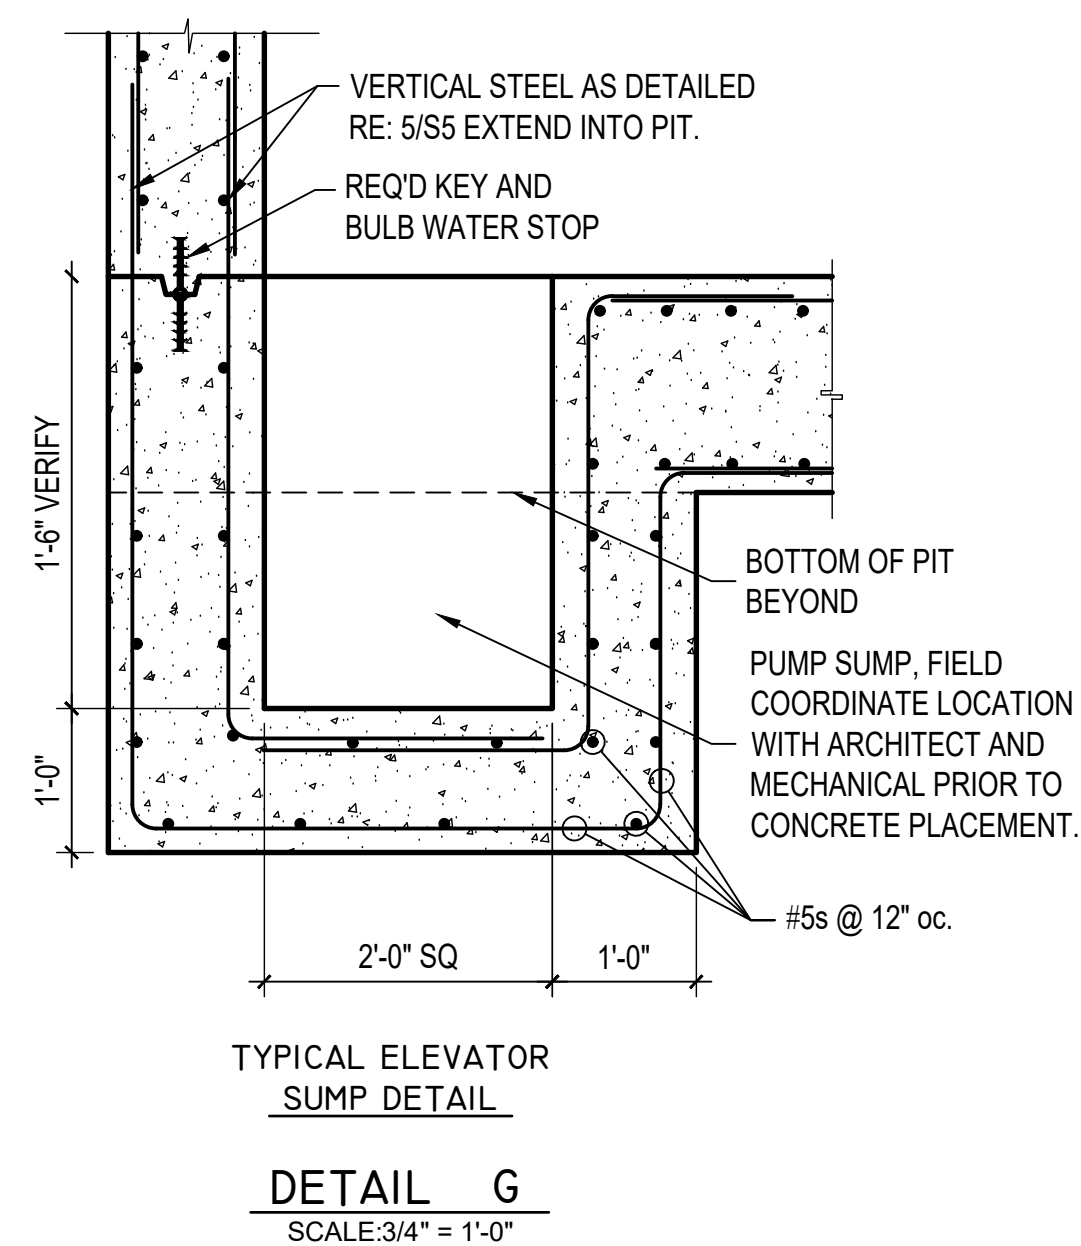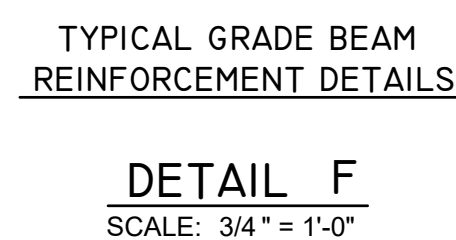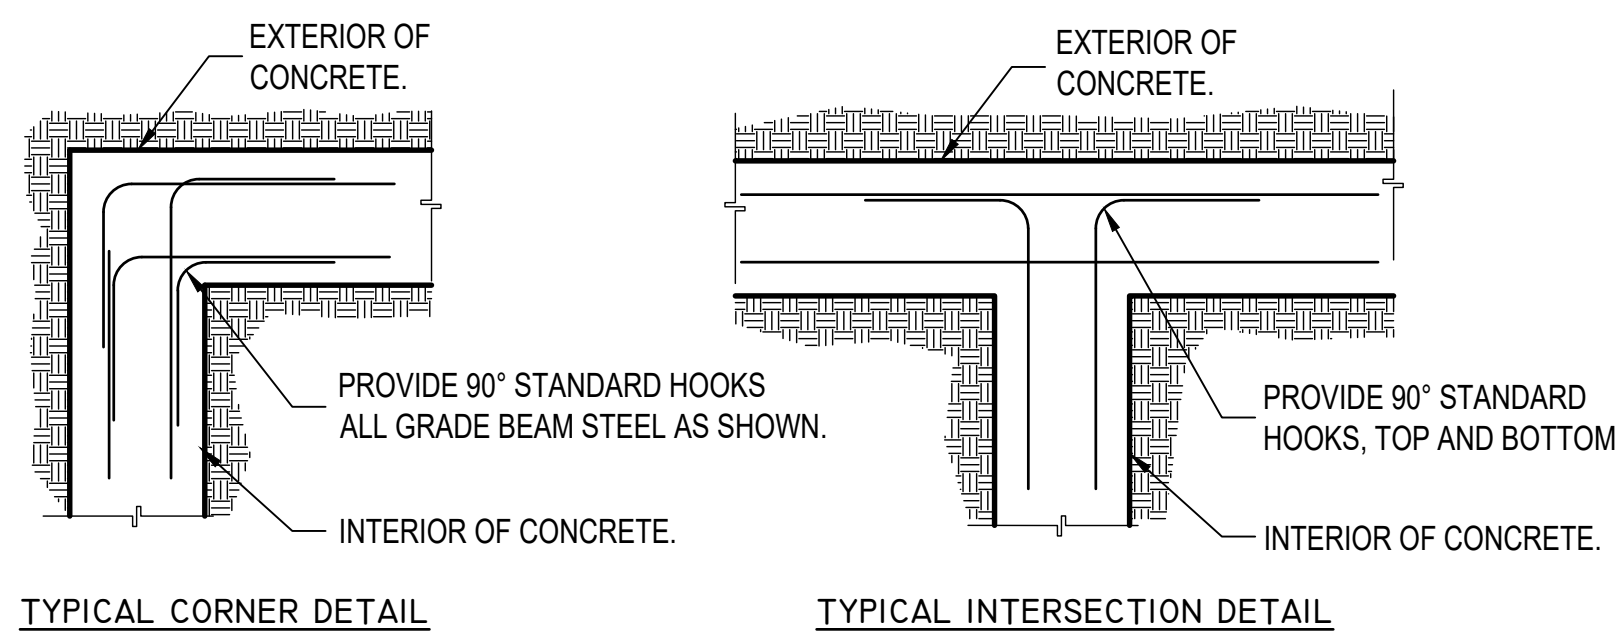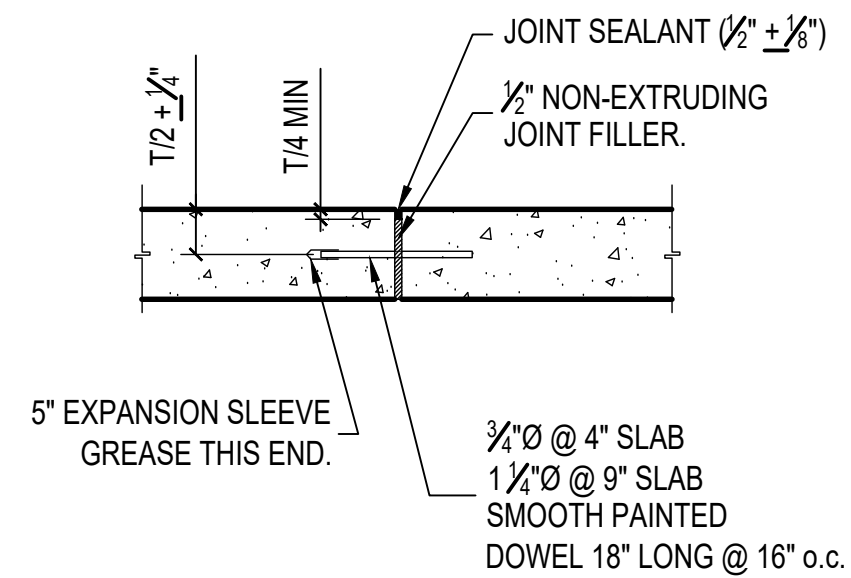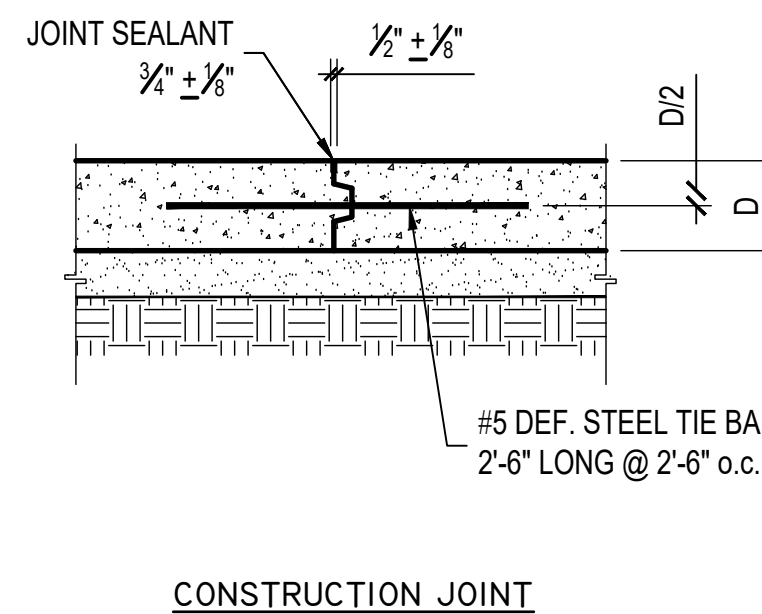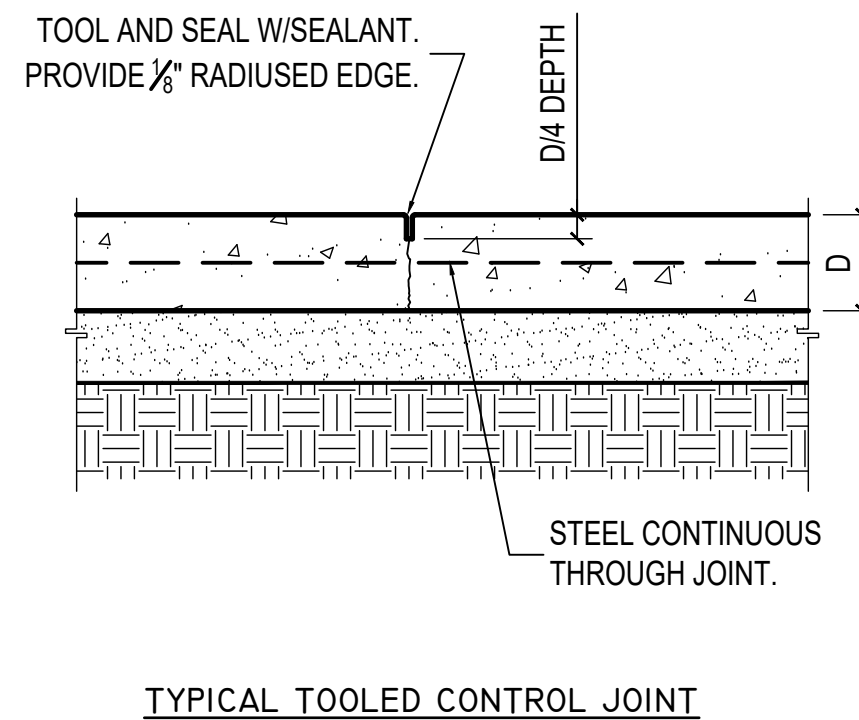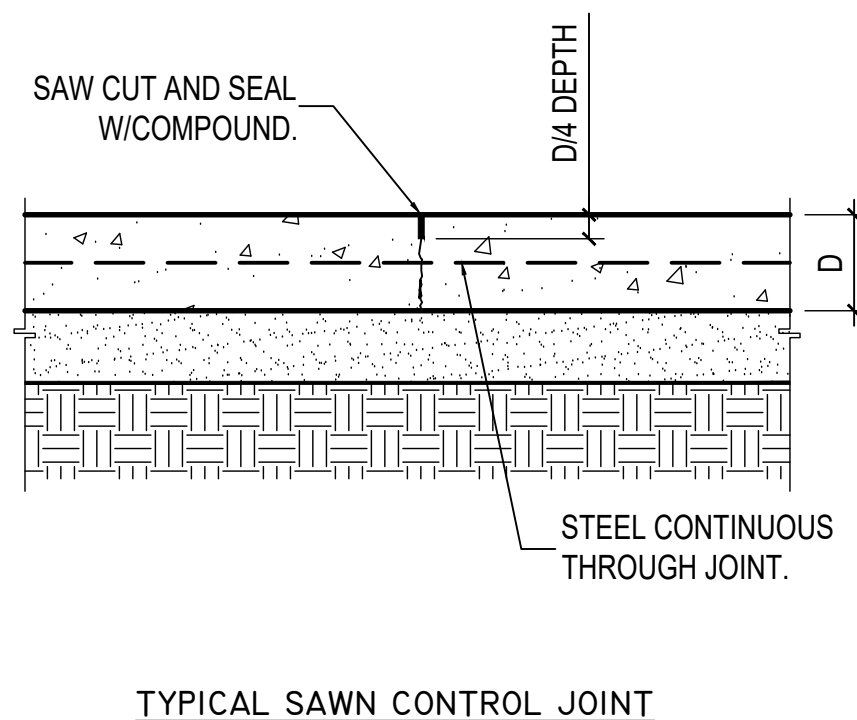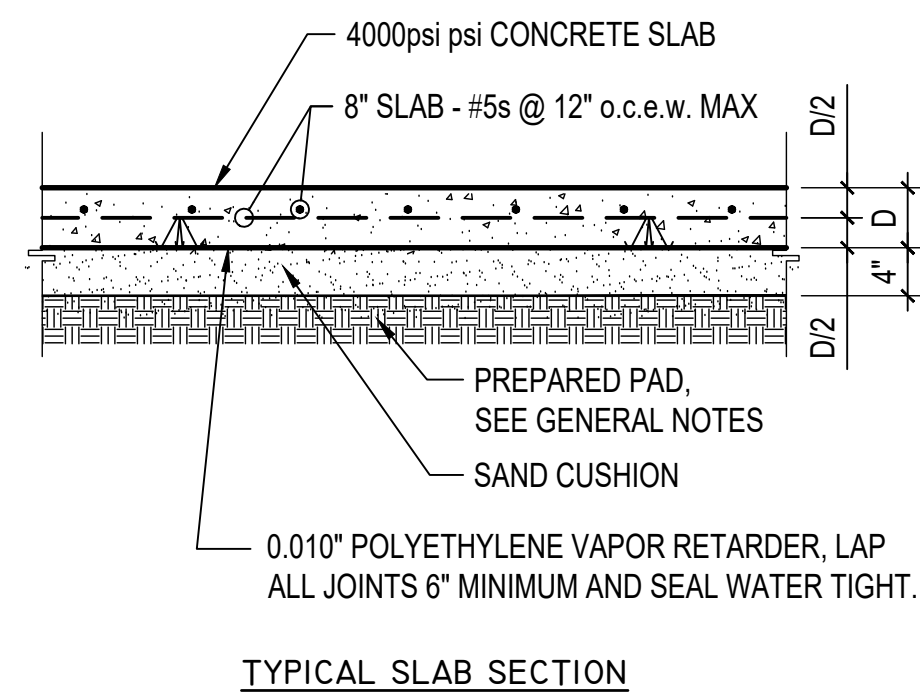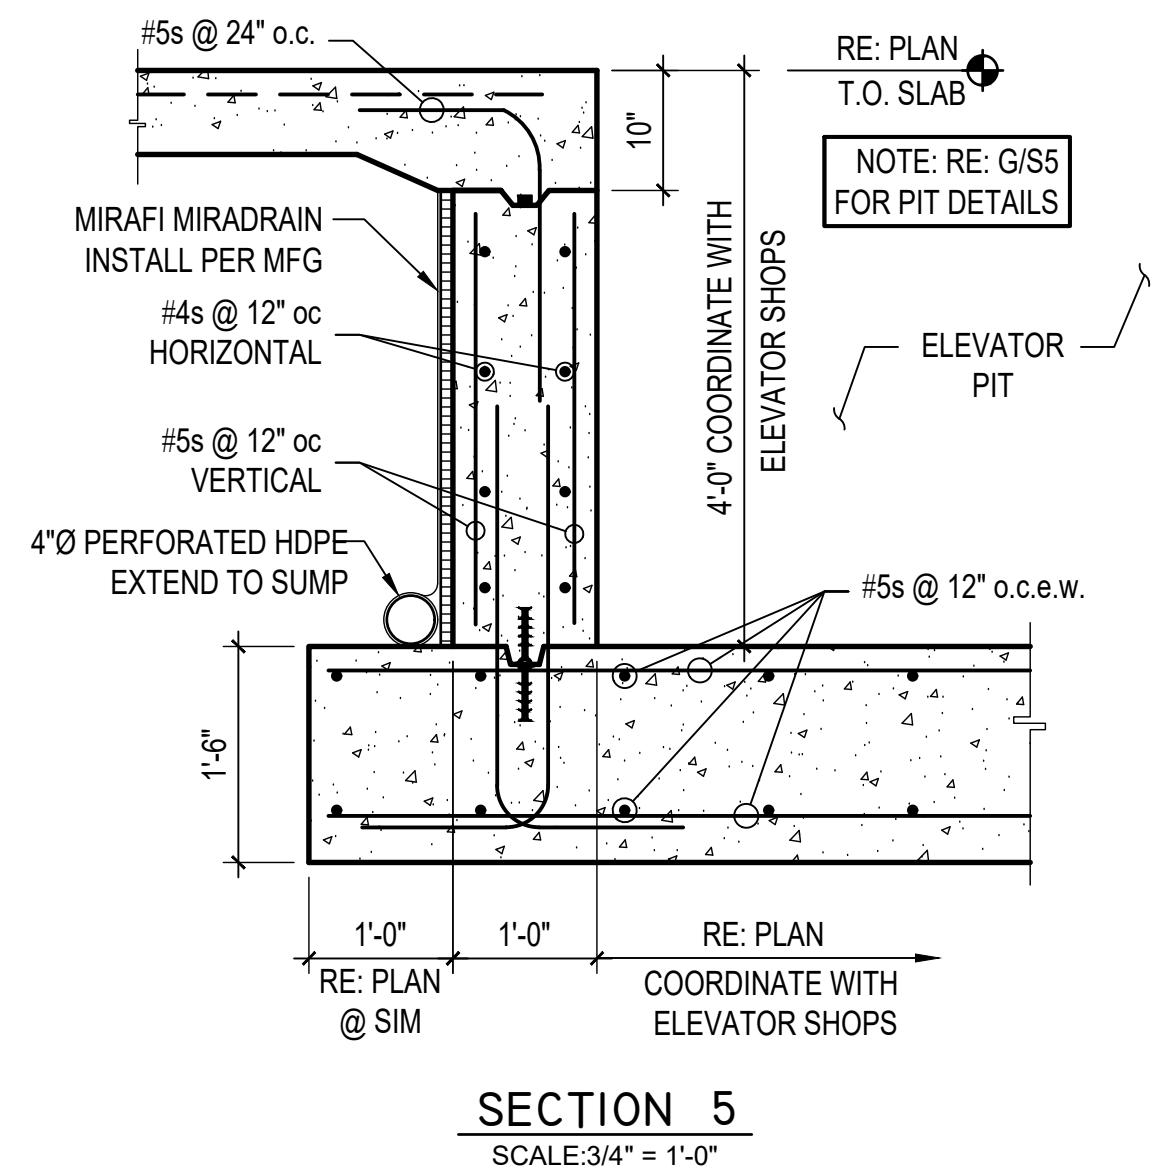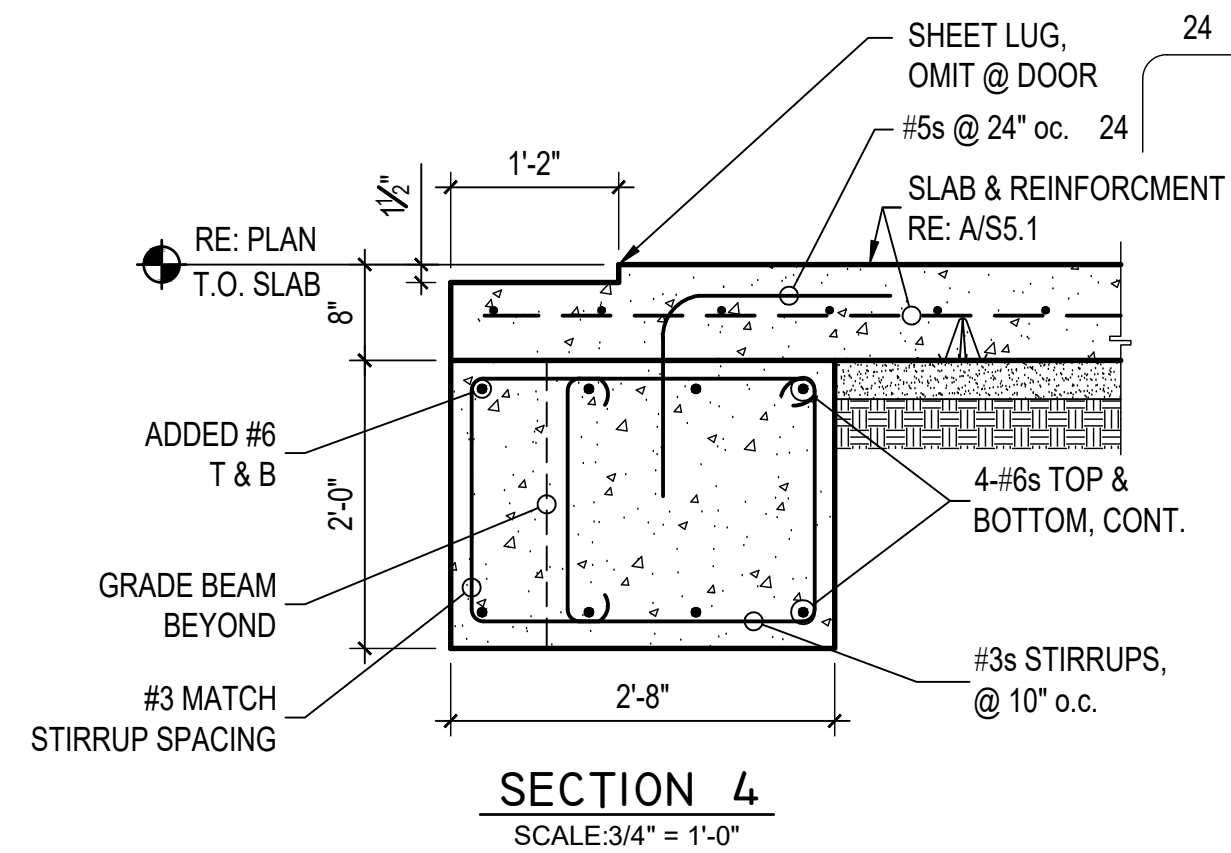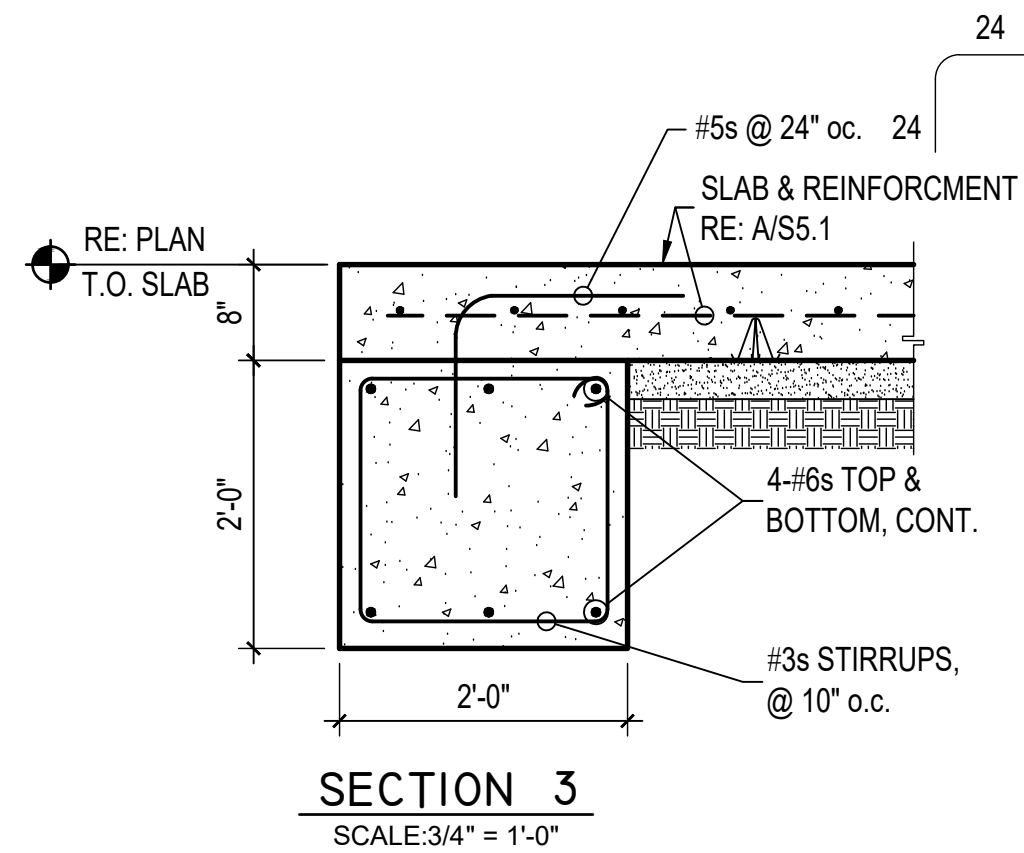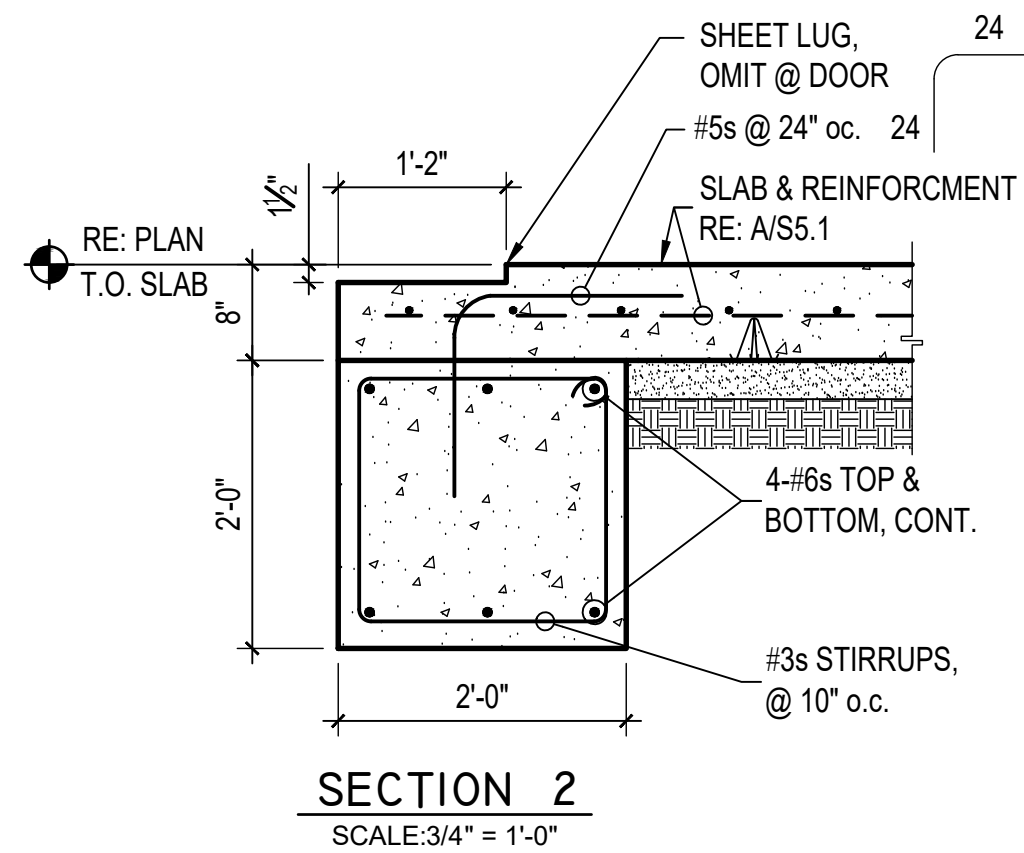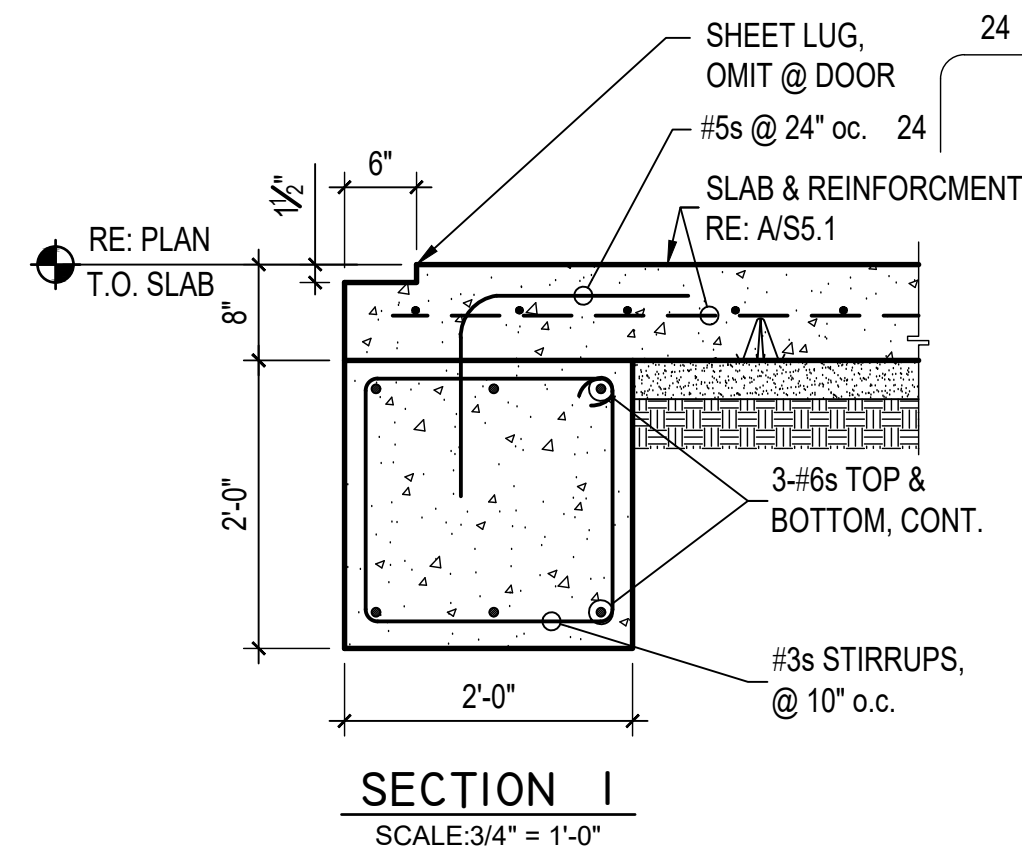

ISSUE	DATE
No.	DATE DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

**Kaufman
Design
Group**

ARCHITECTURE


9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co

SHEET TITLE
FOUNDATION SECTIONS


SHEET NUMBER

S5
OF SHEETS


ISSUED FOR PERMIT

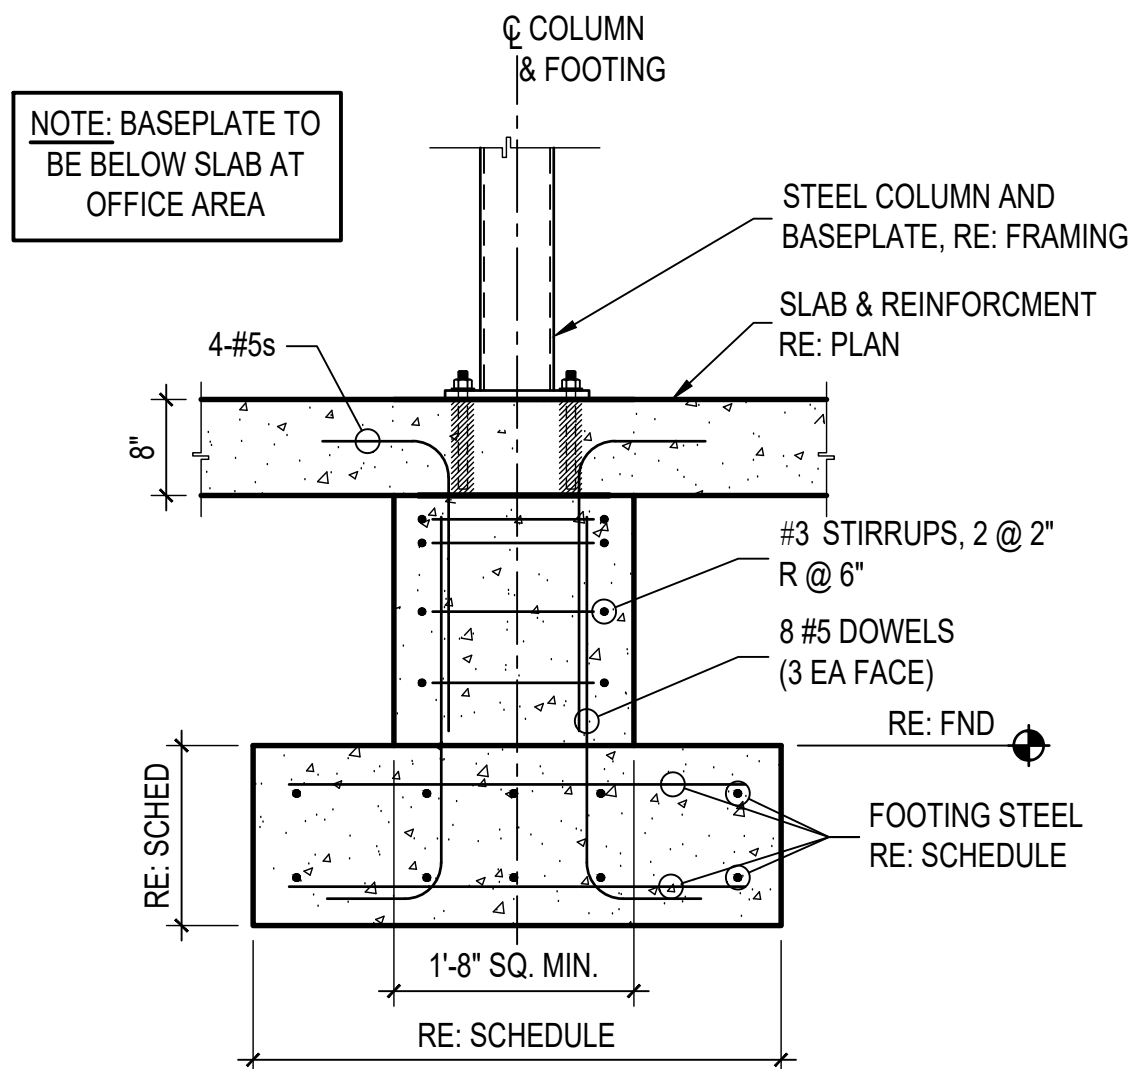


FOOTING A
SCALE: 3/4" = 1'-0"

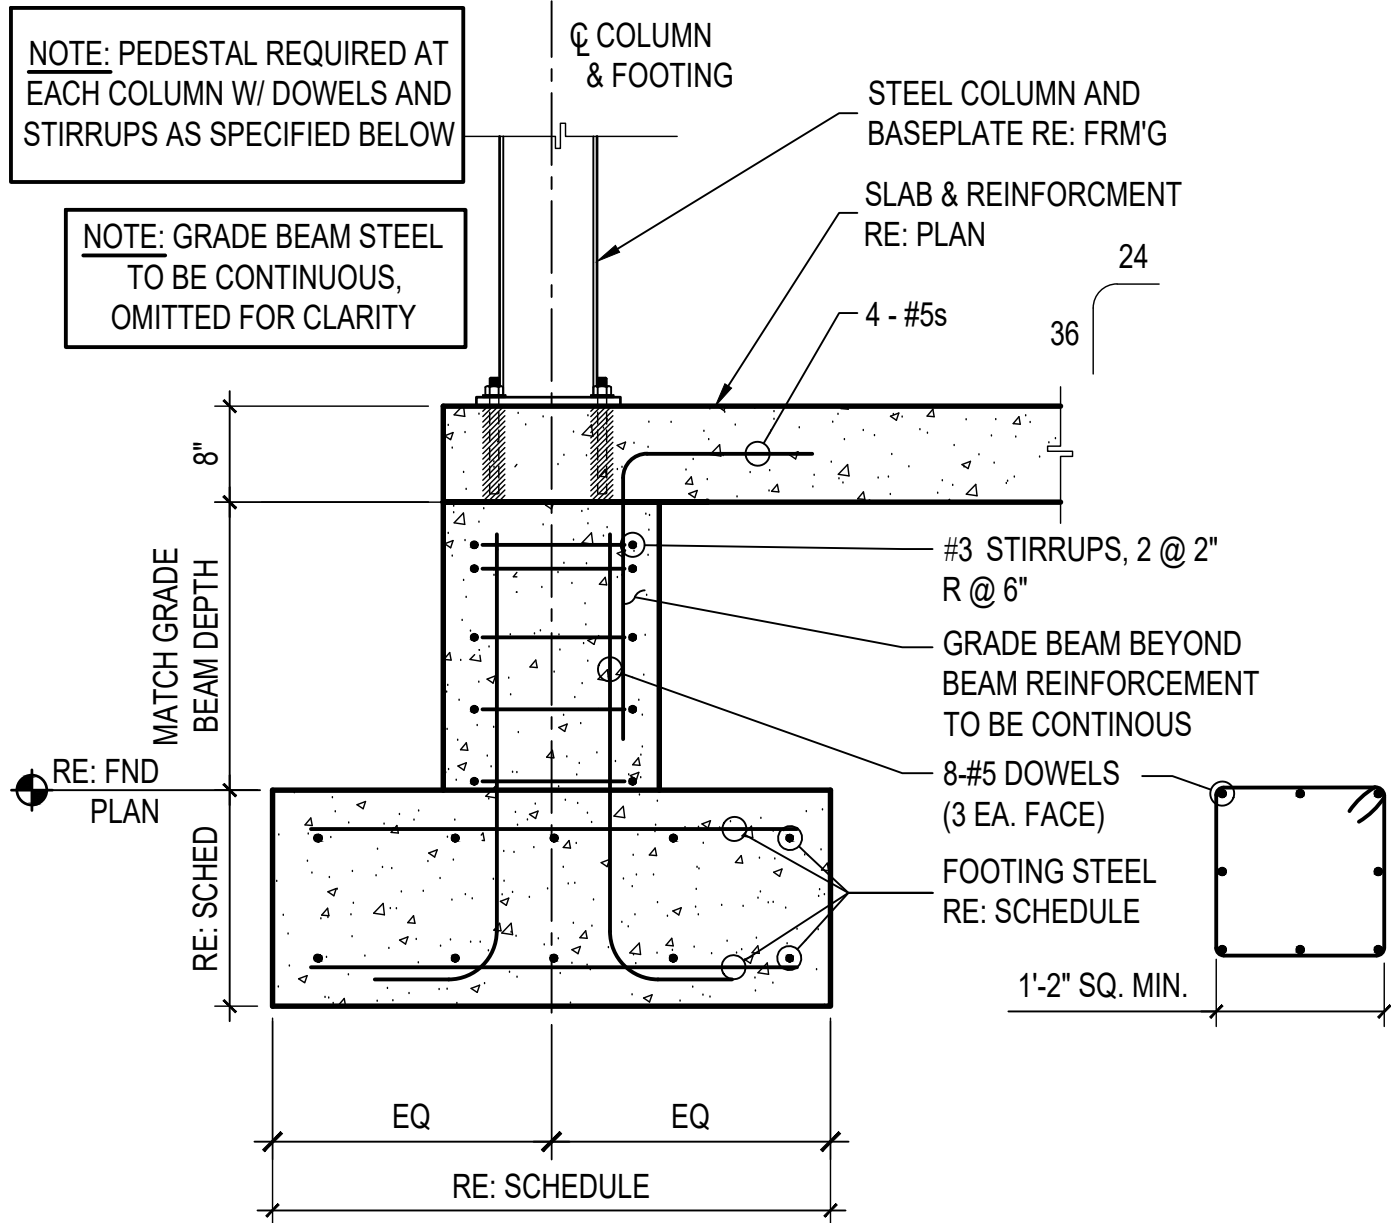

FOOTING B
SCALE: 3/4" = 1'-0"

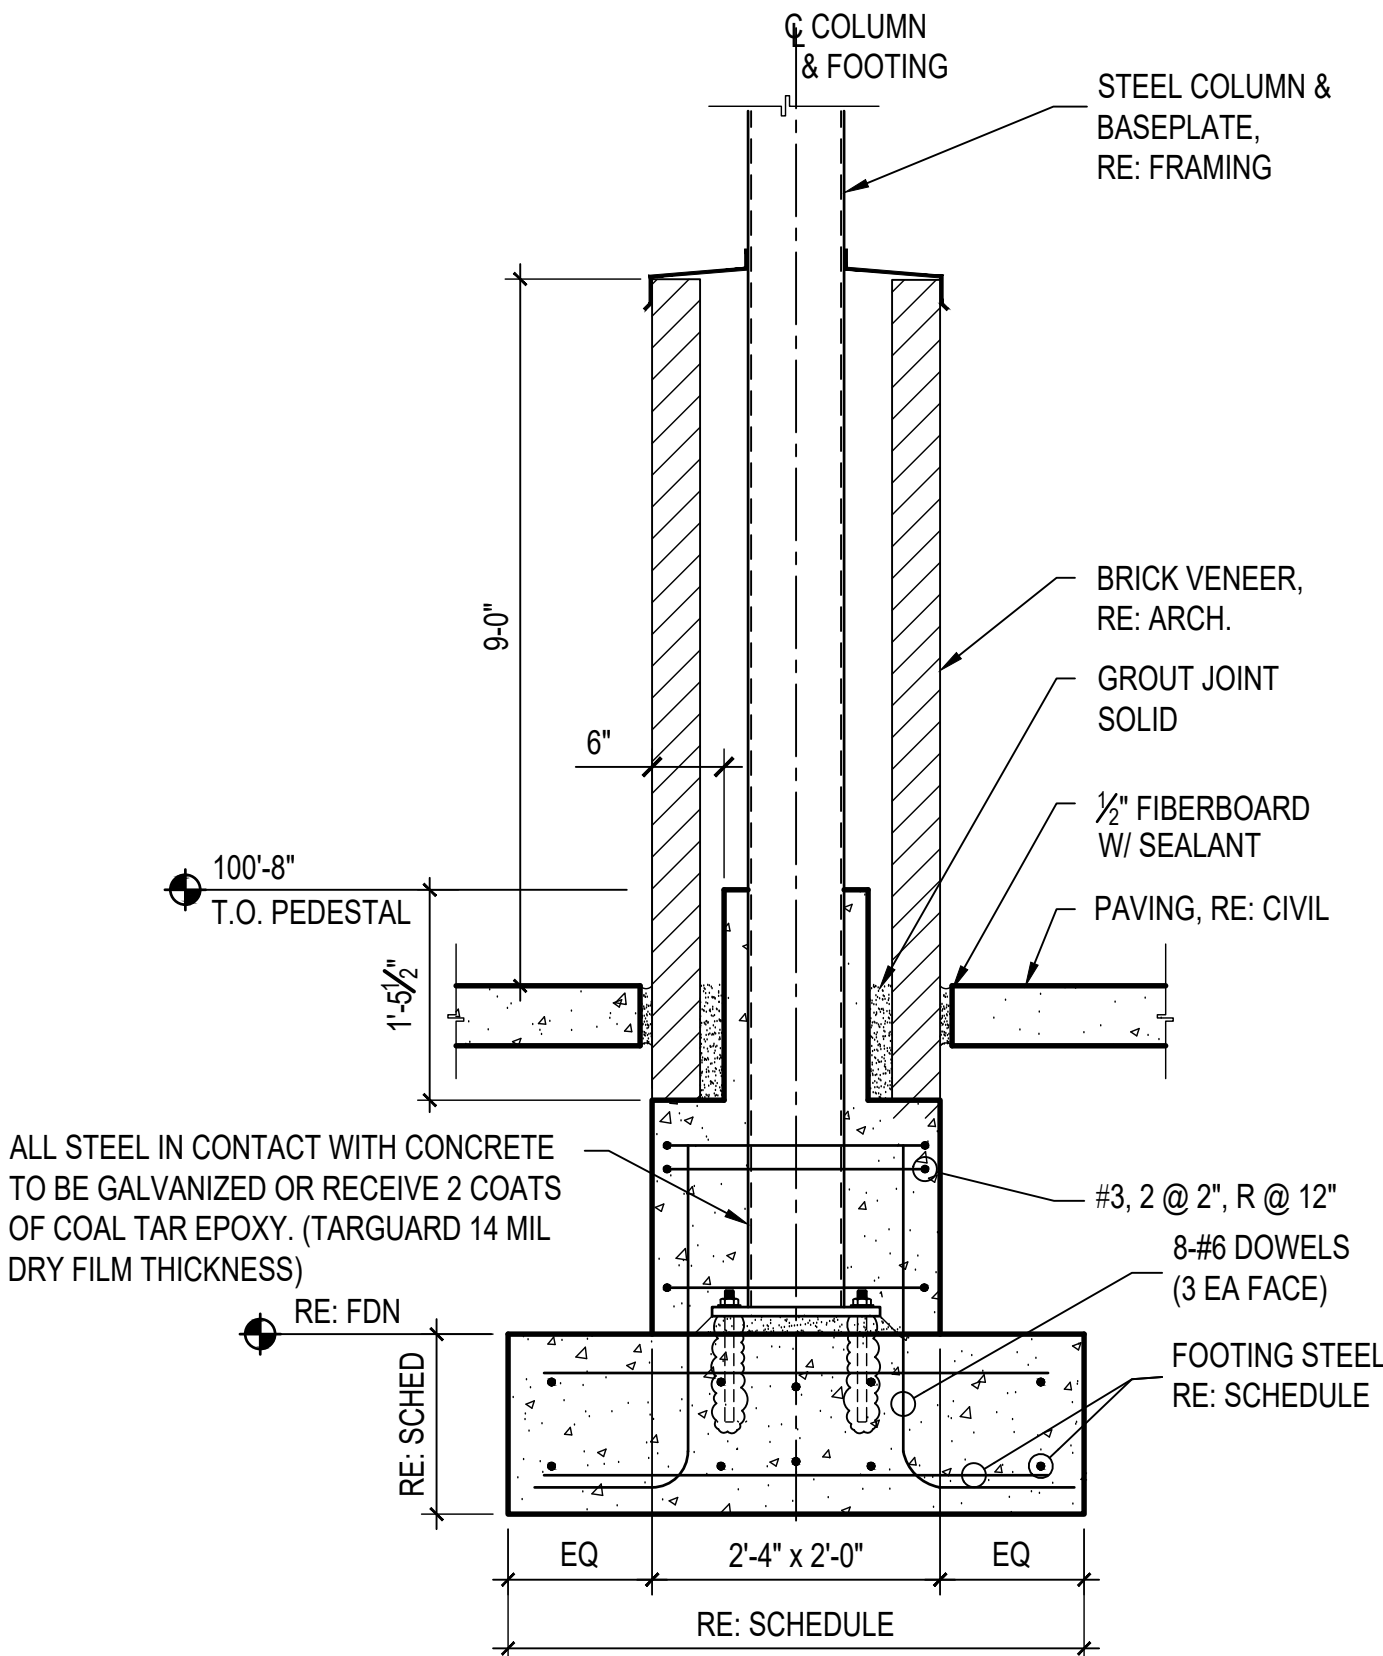

SECTION
FOOTING C
SCALE: 3/4" = 1'-0"

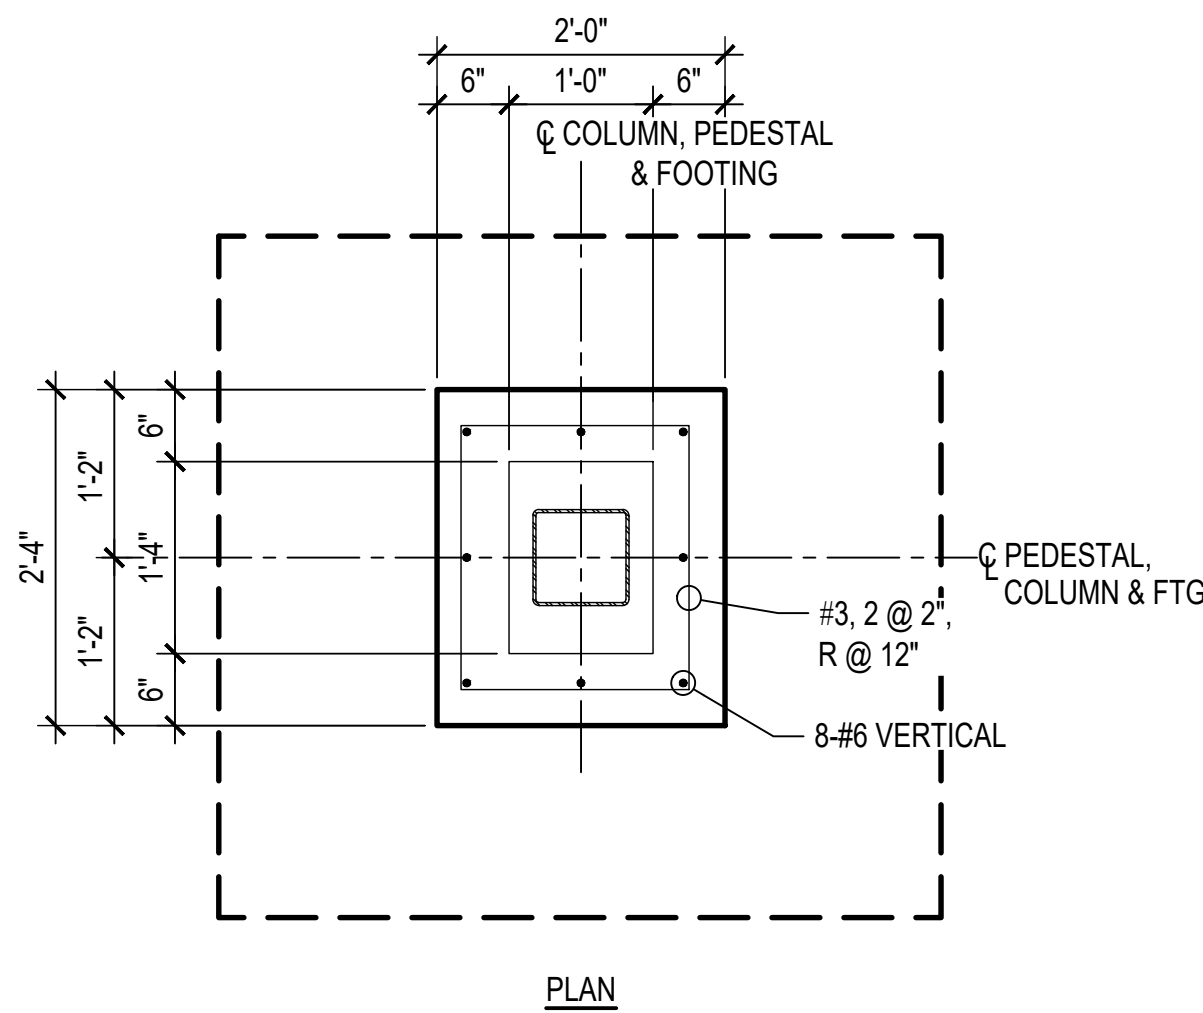

ISSUE		DATE
NO.	DATE	DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group

ARCHITECTURE


9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co

SHEET TITLE
FOUNDATION SECTIONS
AND DETAILS

SHEET NUMBER

S5.1
OF SHEETS

ISSUED FOR PERMIT

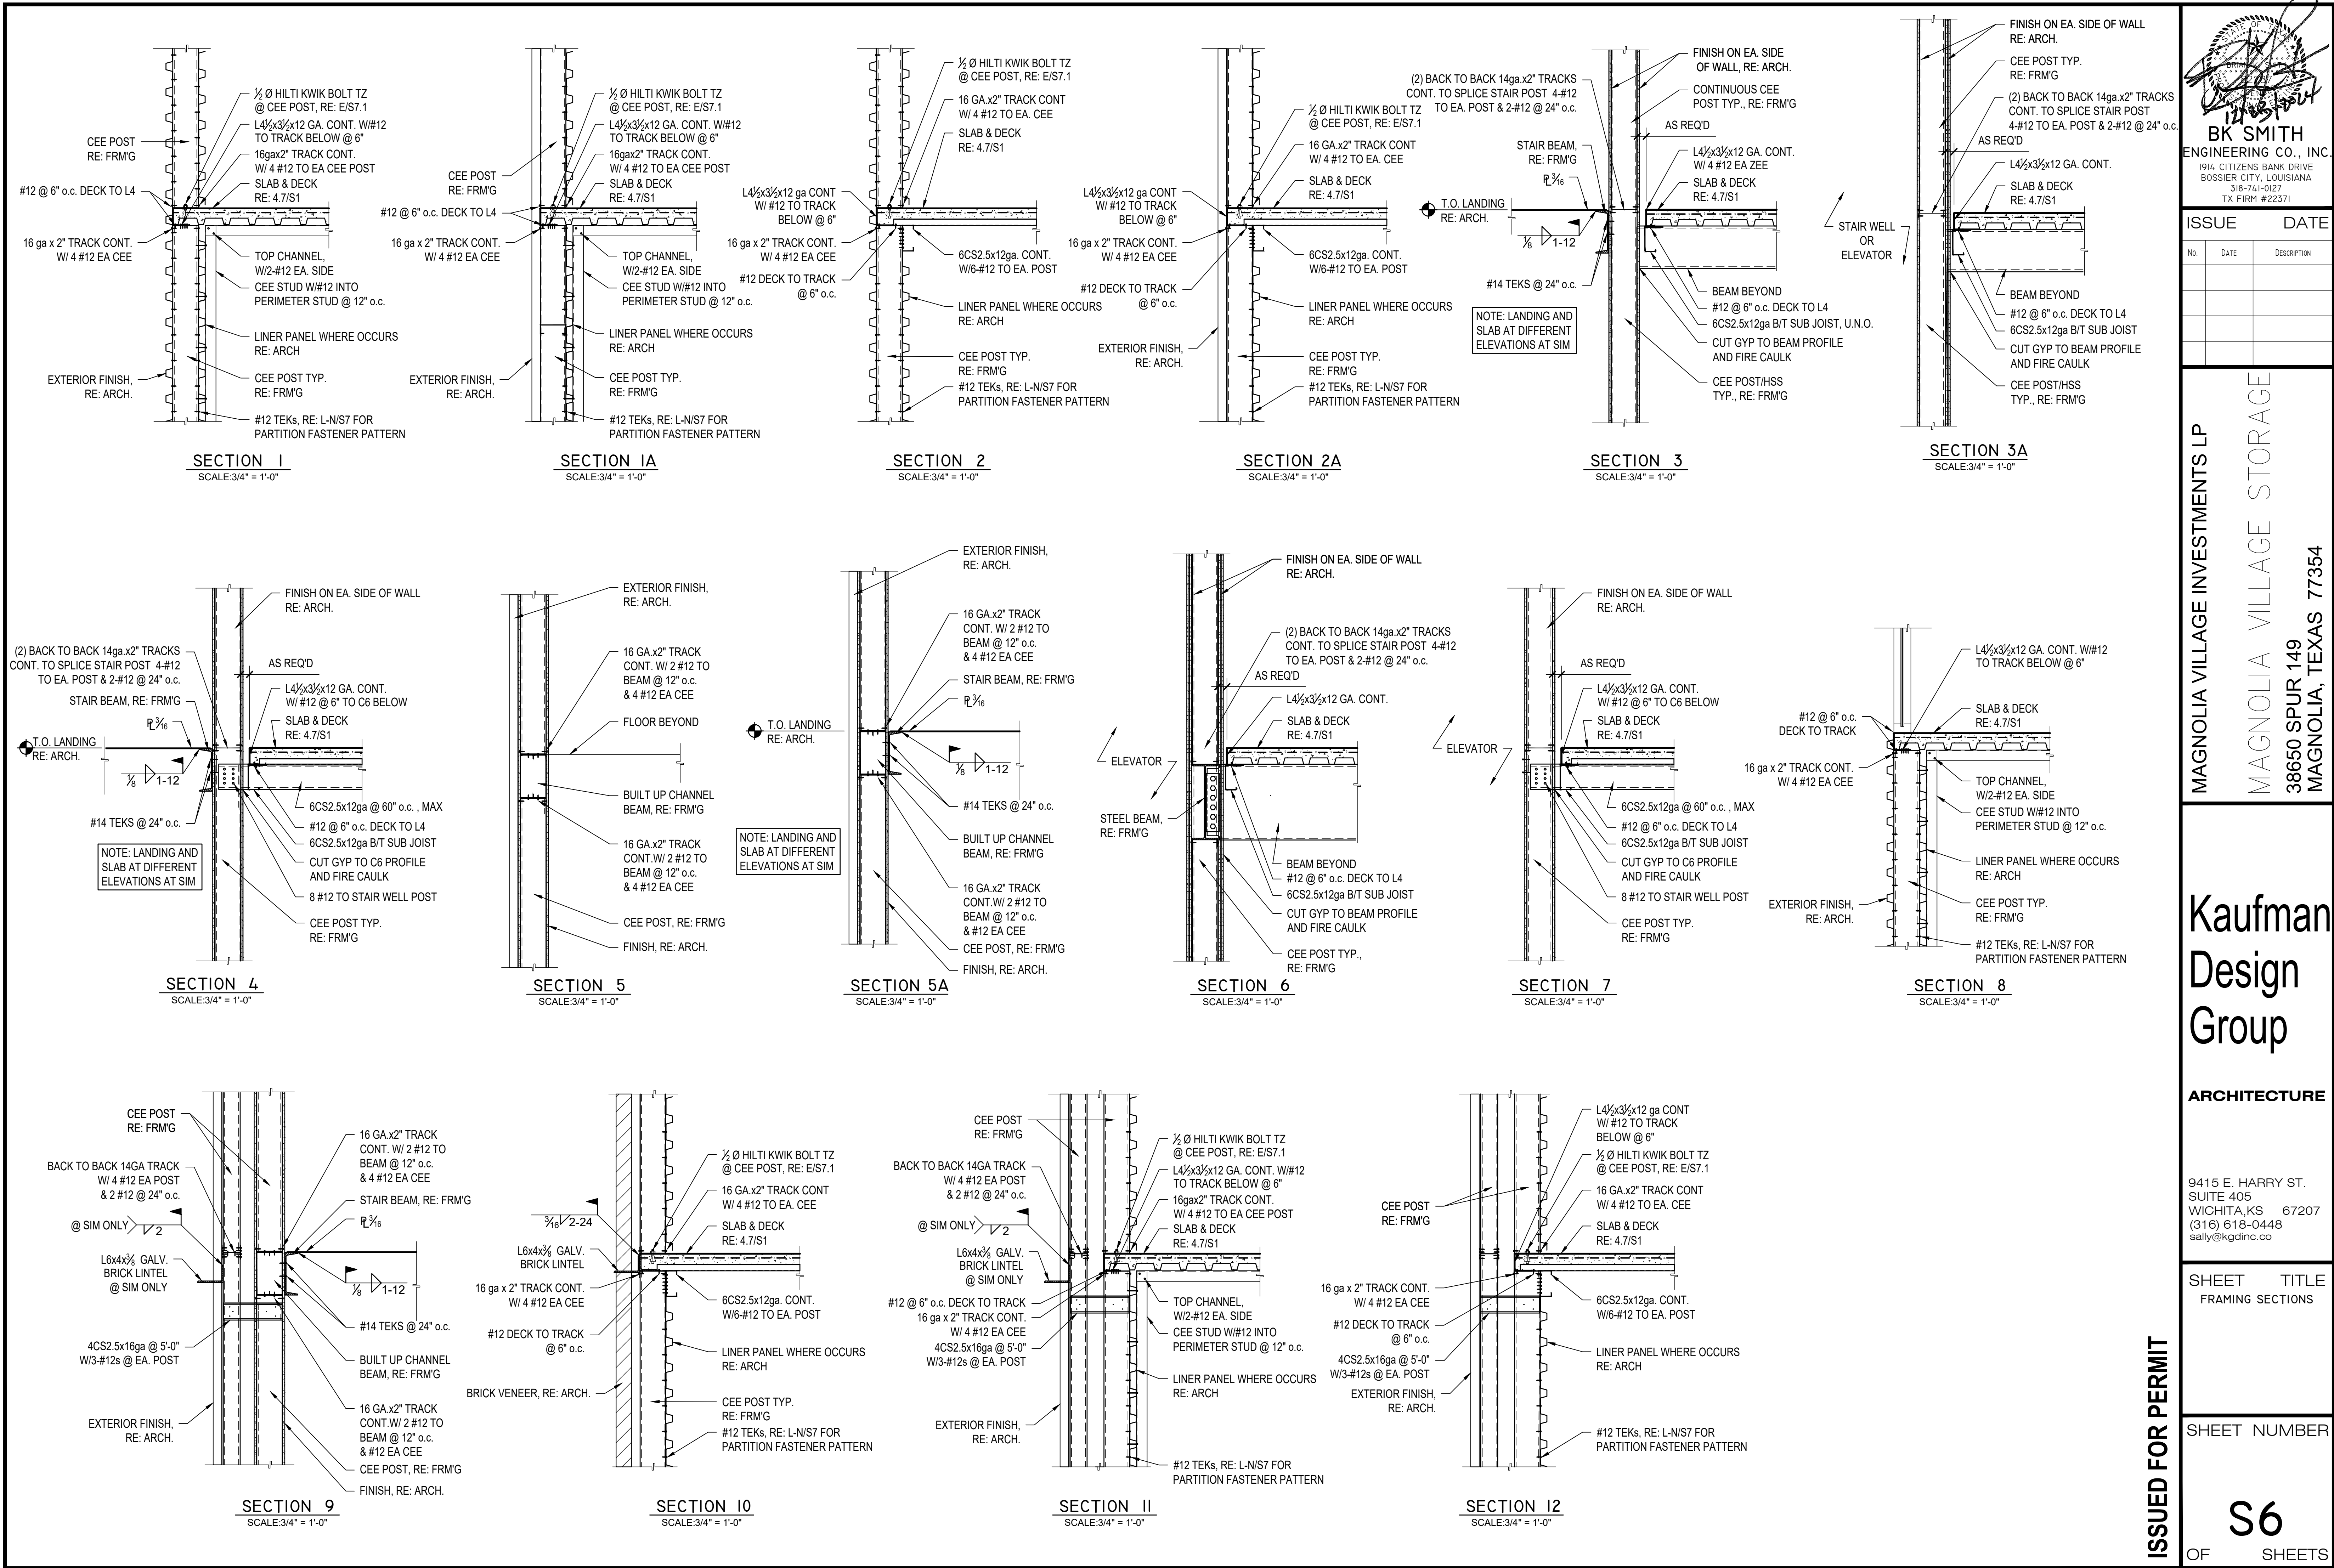

ISSUE		DATE
NO.	DATE	DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group

ARCHITECTURE

9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co

SHEET TITLE
FRAMING SECTIONS

SHEET NUMBER

S6
OF SHEETS

ISSUED FOR PERMIT

ISSUE		DATE
No.	DATE	DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

**Kaufman
Design
Group**

ARCHITECTURE


9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co

SHEET TITLE
FRAMING SECTIONS

SHEET NUMBER

S6.1
OF SHEETS

ISSUED FOR PERMIT

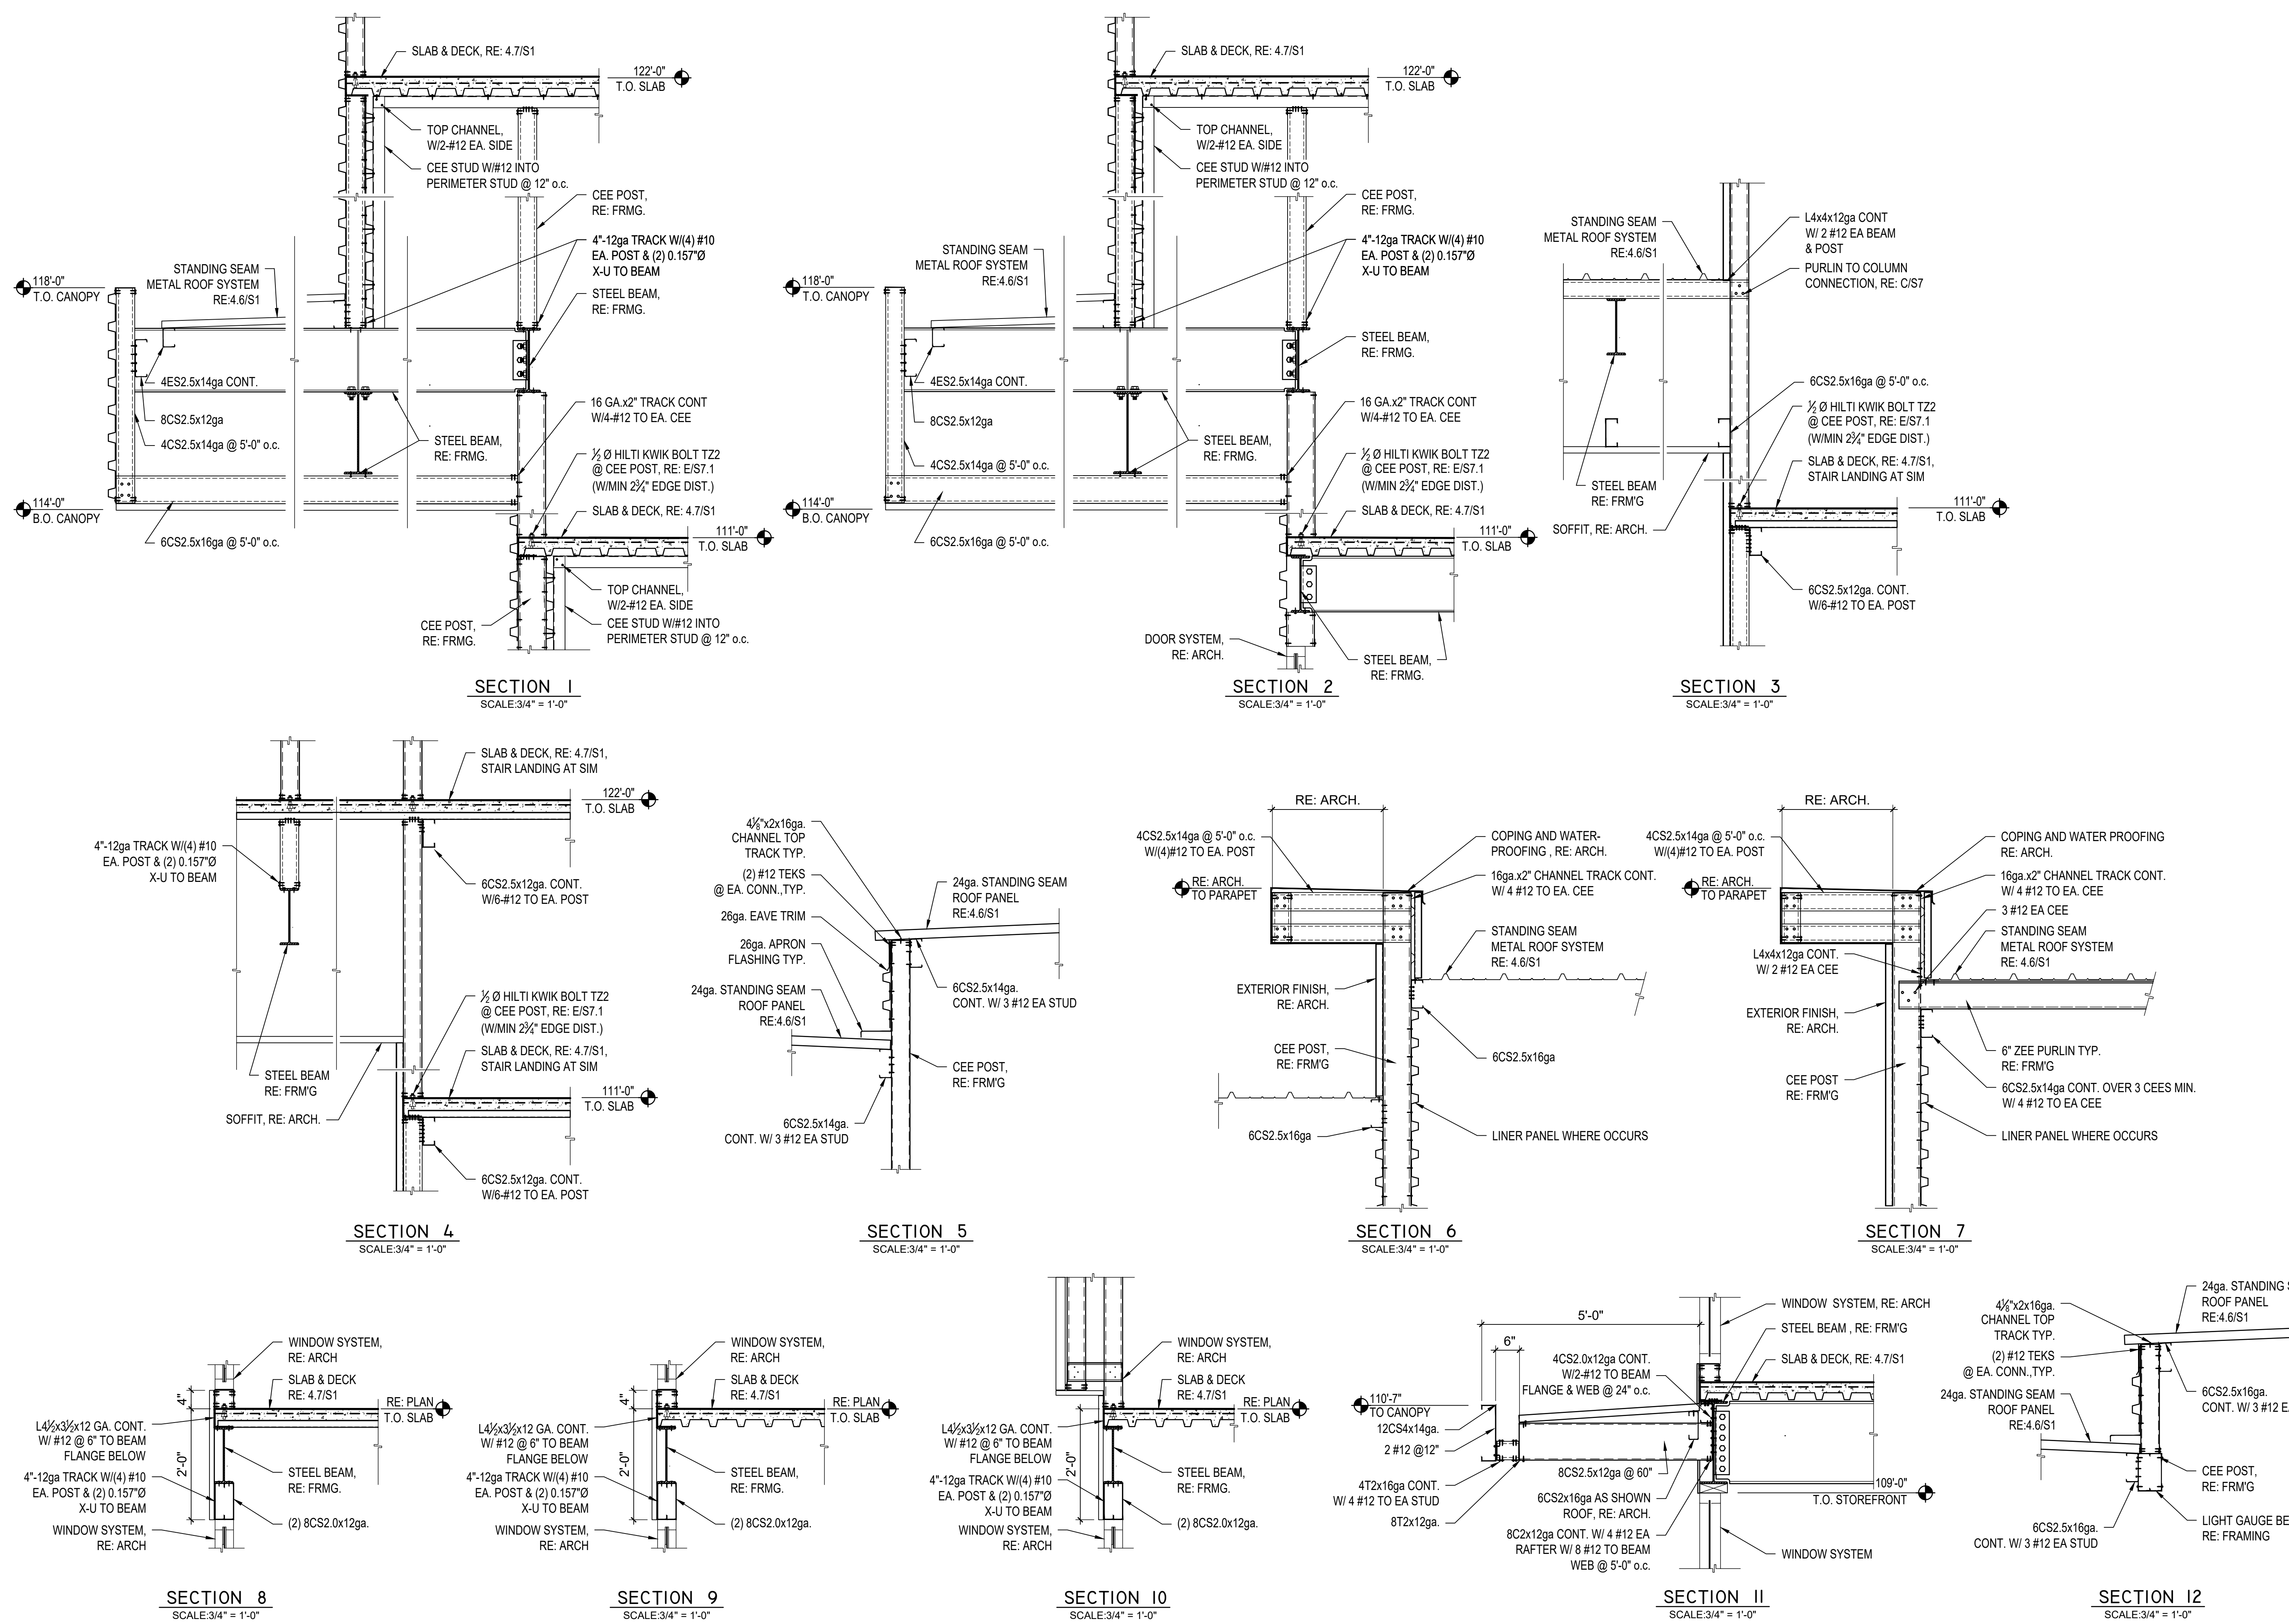

ISSUE		DATE
NO.	DATE	DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

**Kaufman
Design
Group**

ARCHITECTURE
















9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co


SHEET TITLE
FRAMING SECTIONS

SHEET NUMBER

S6.2
OF SHEETS


ISSUED FOR PERMIT

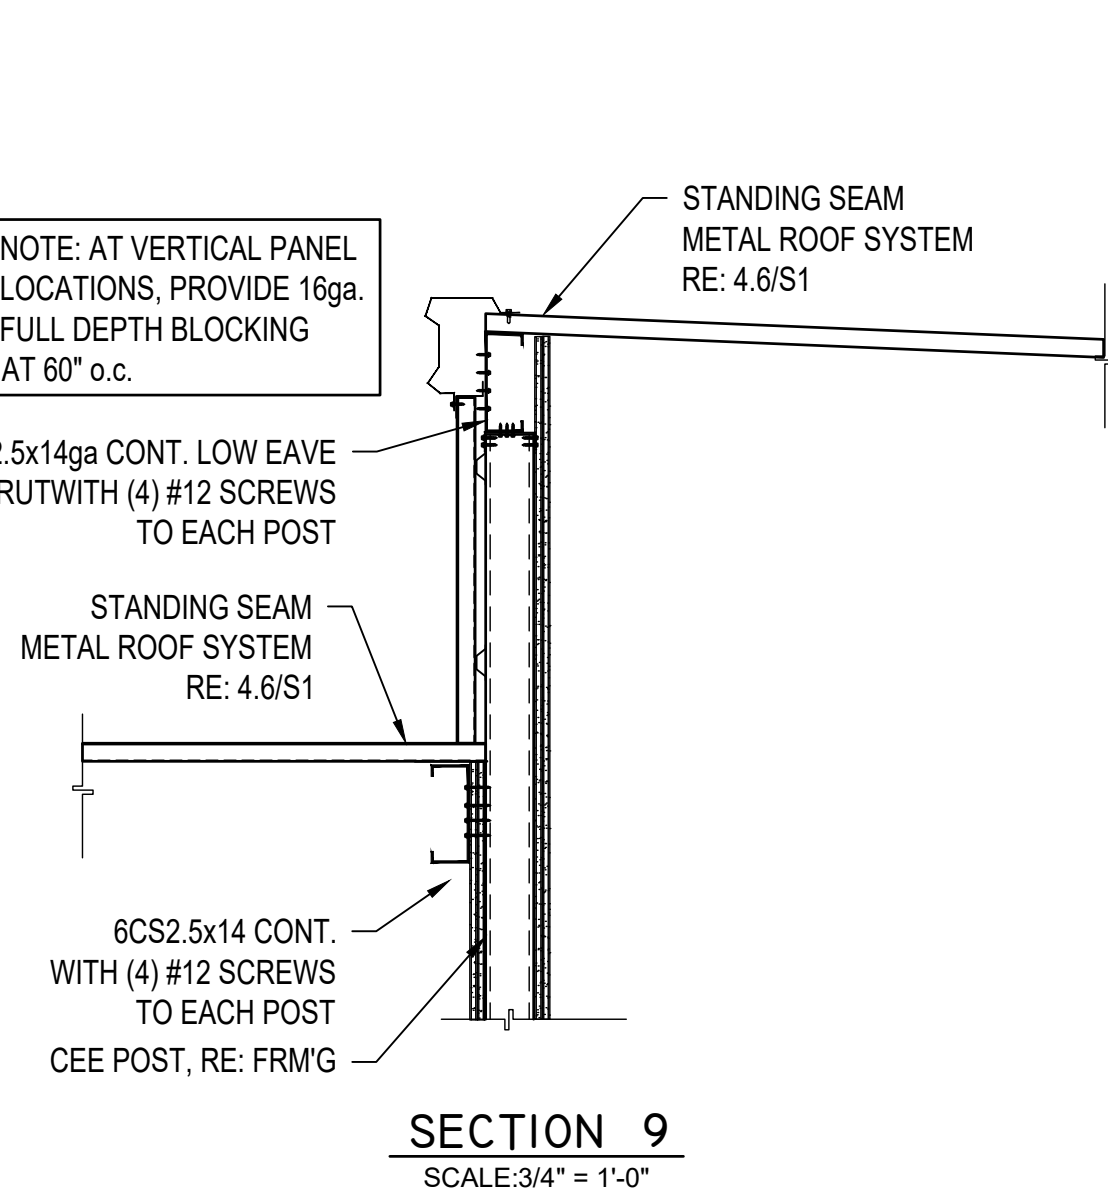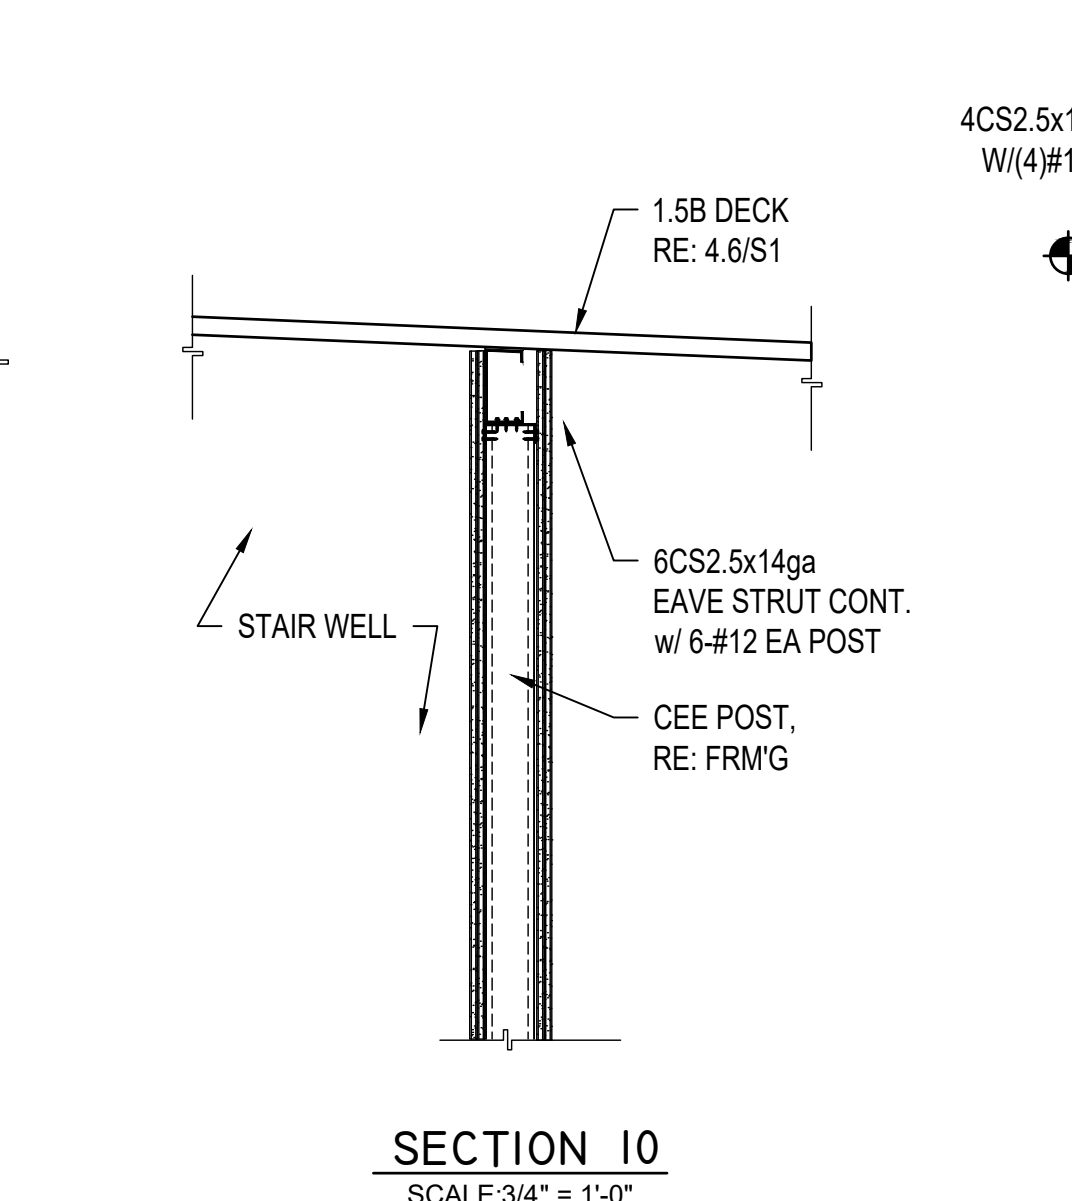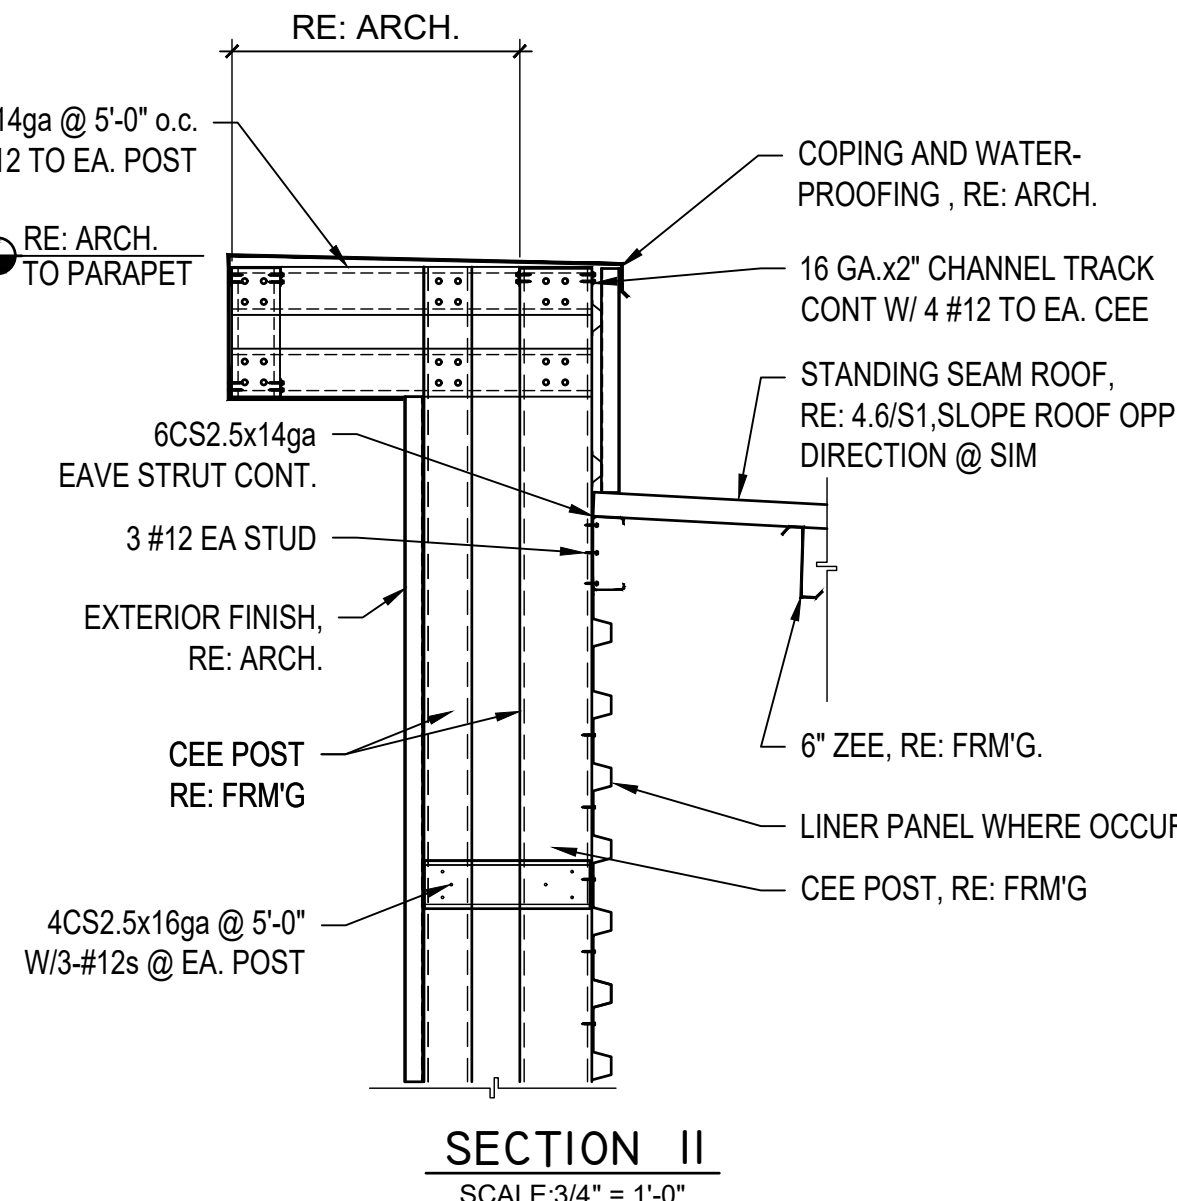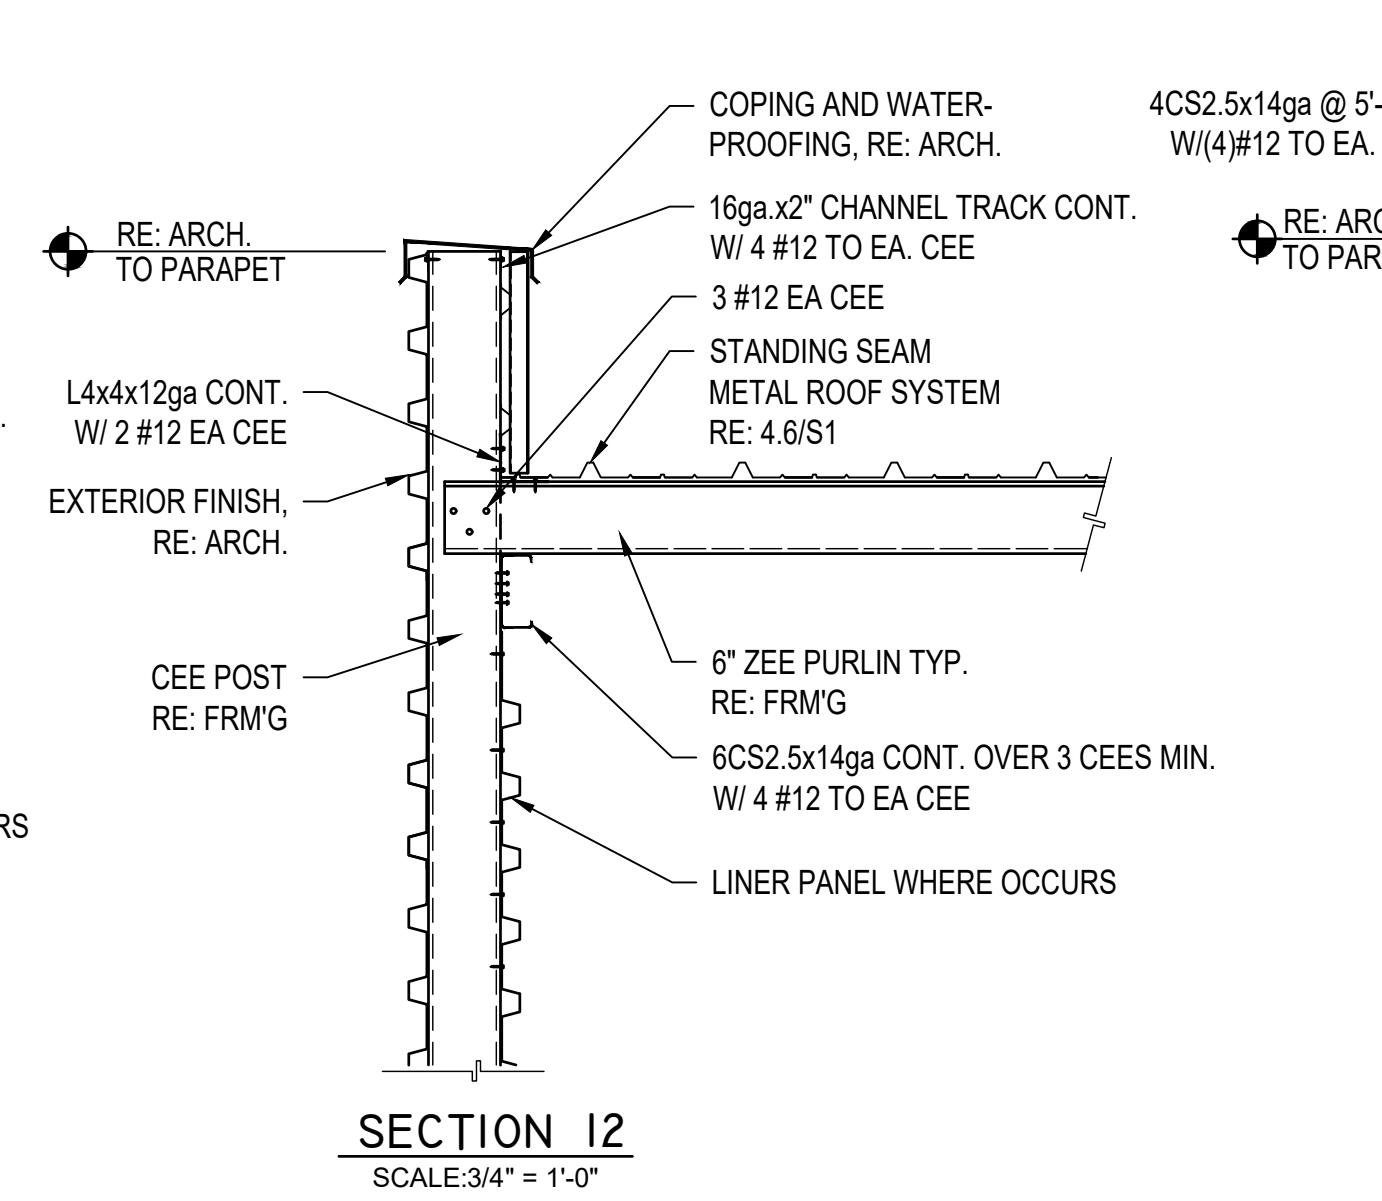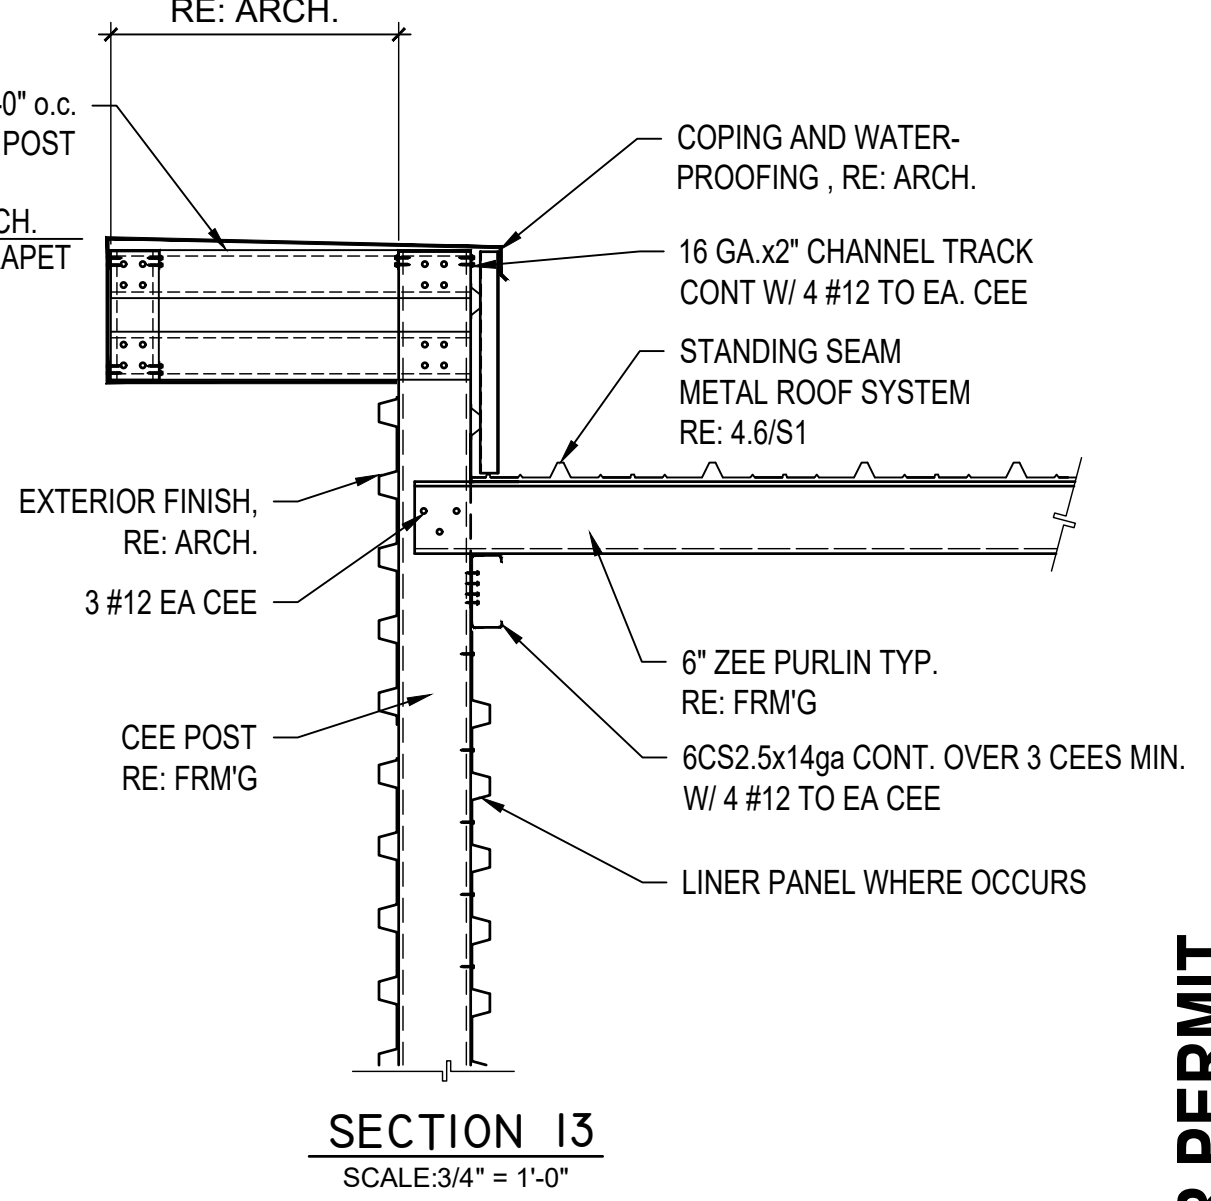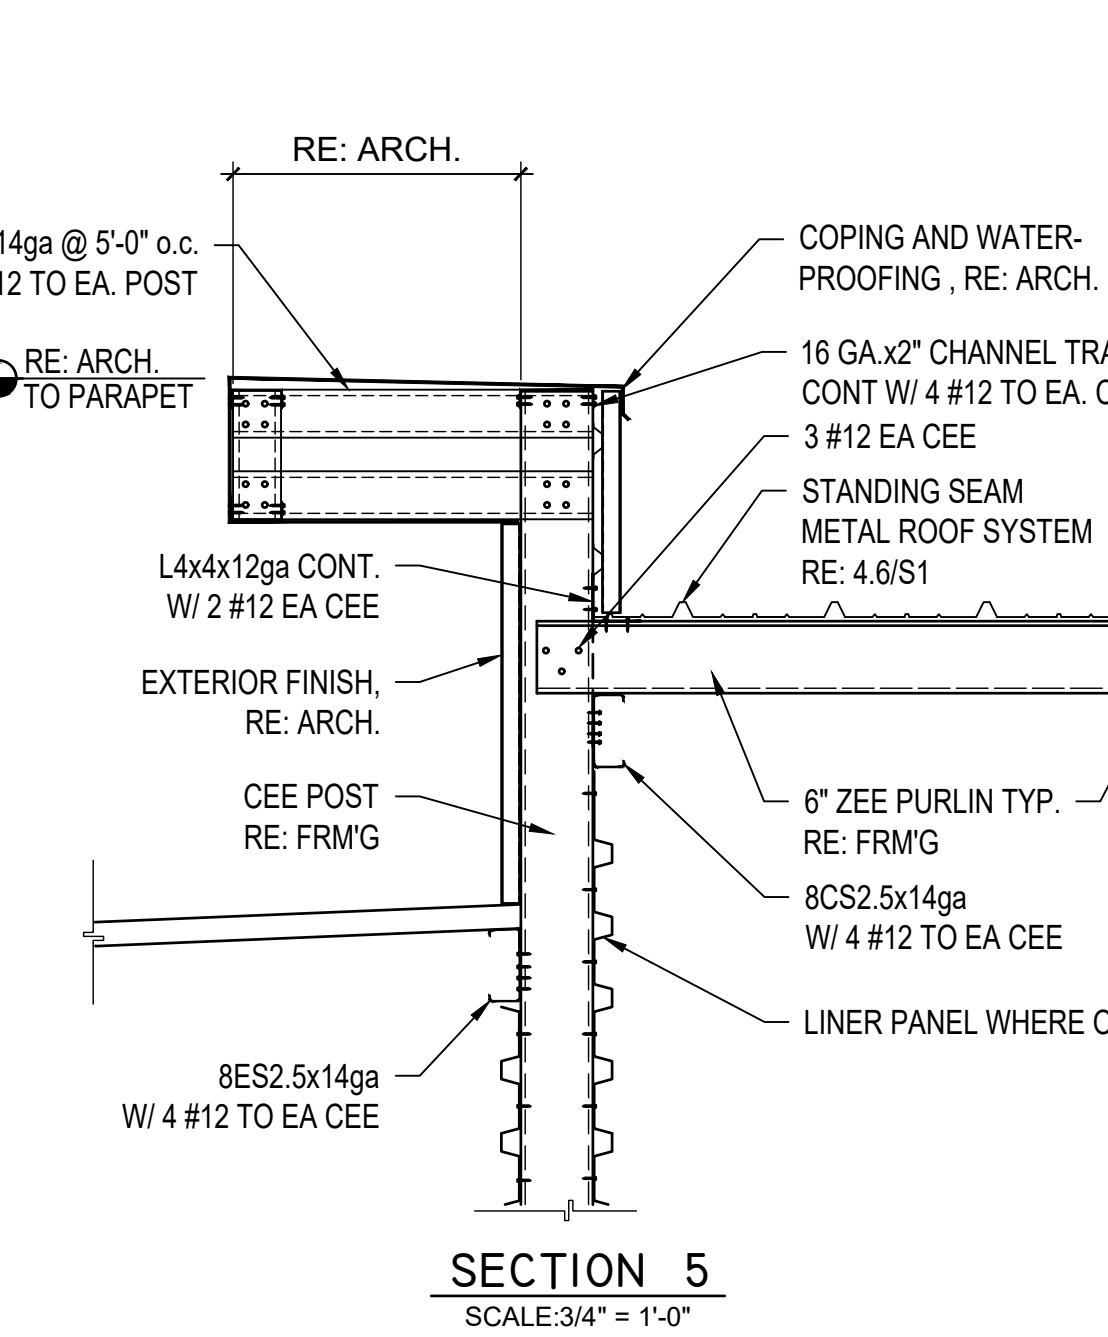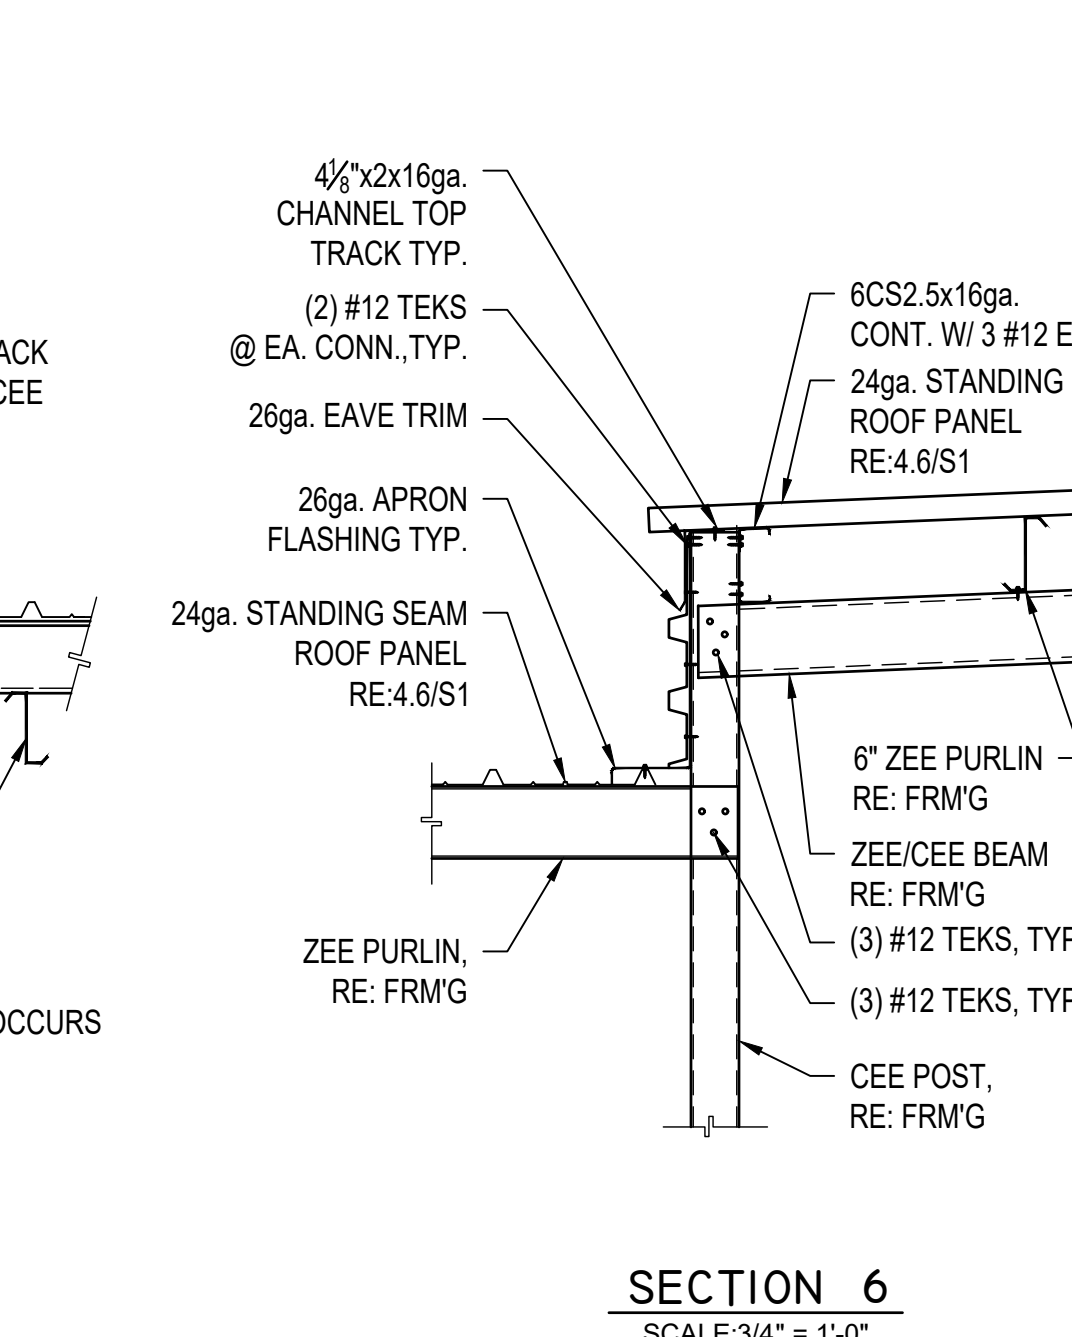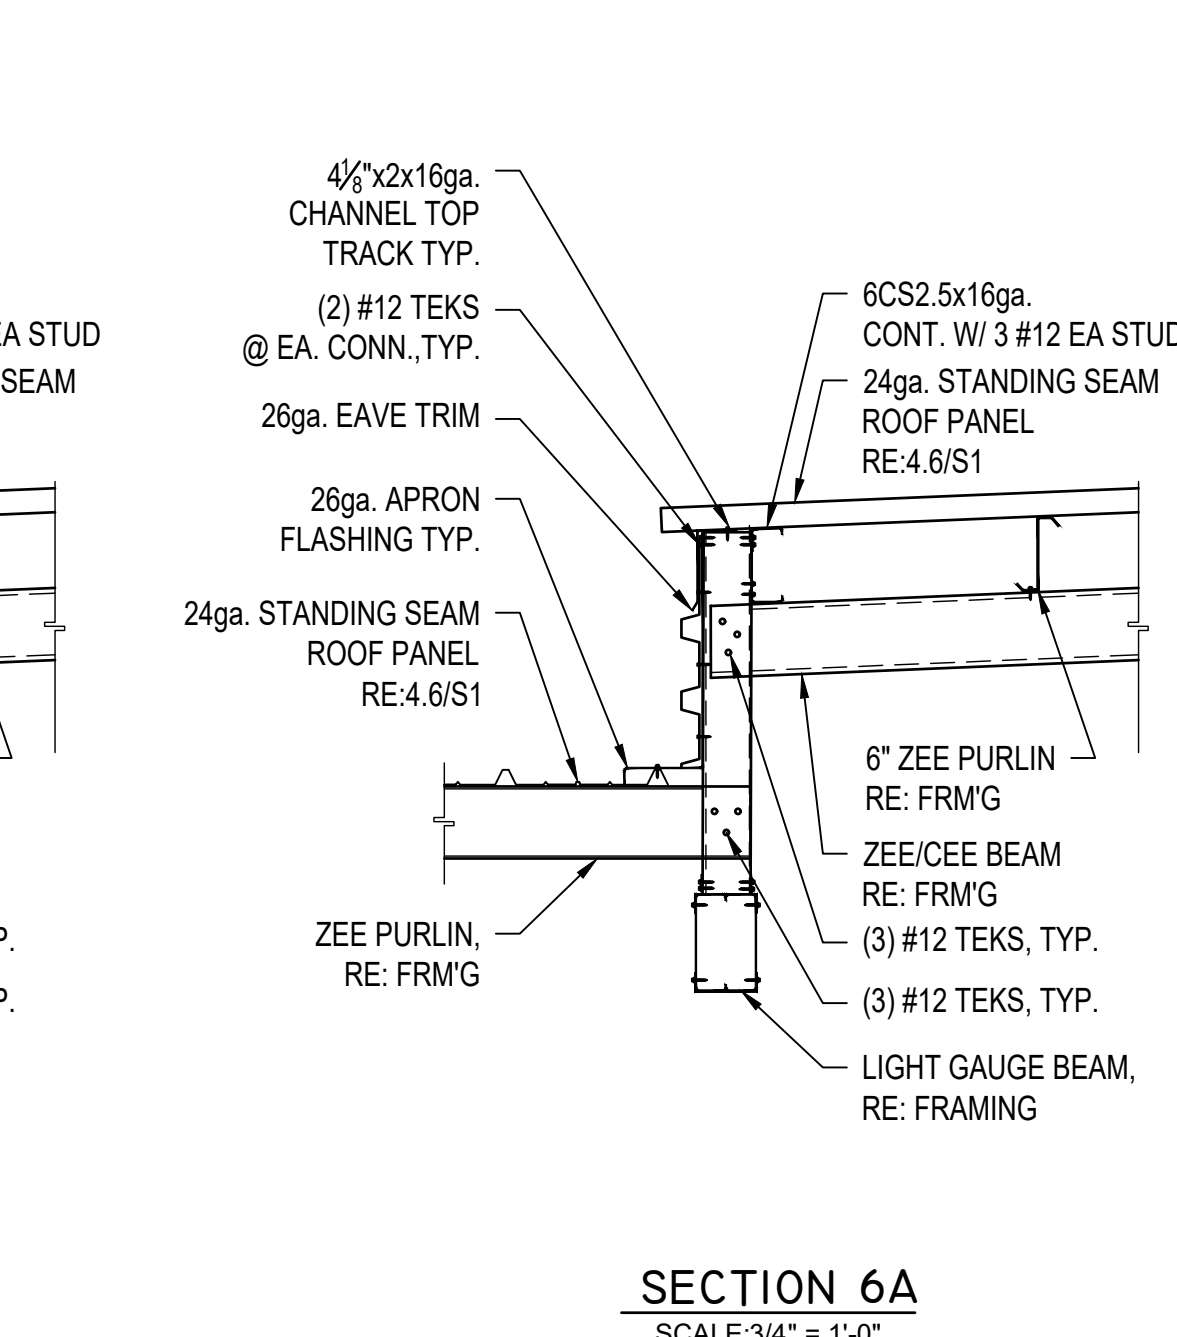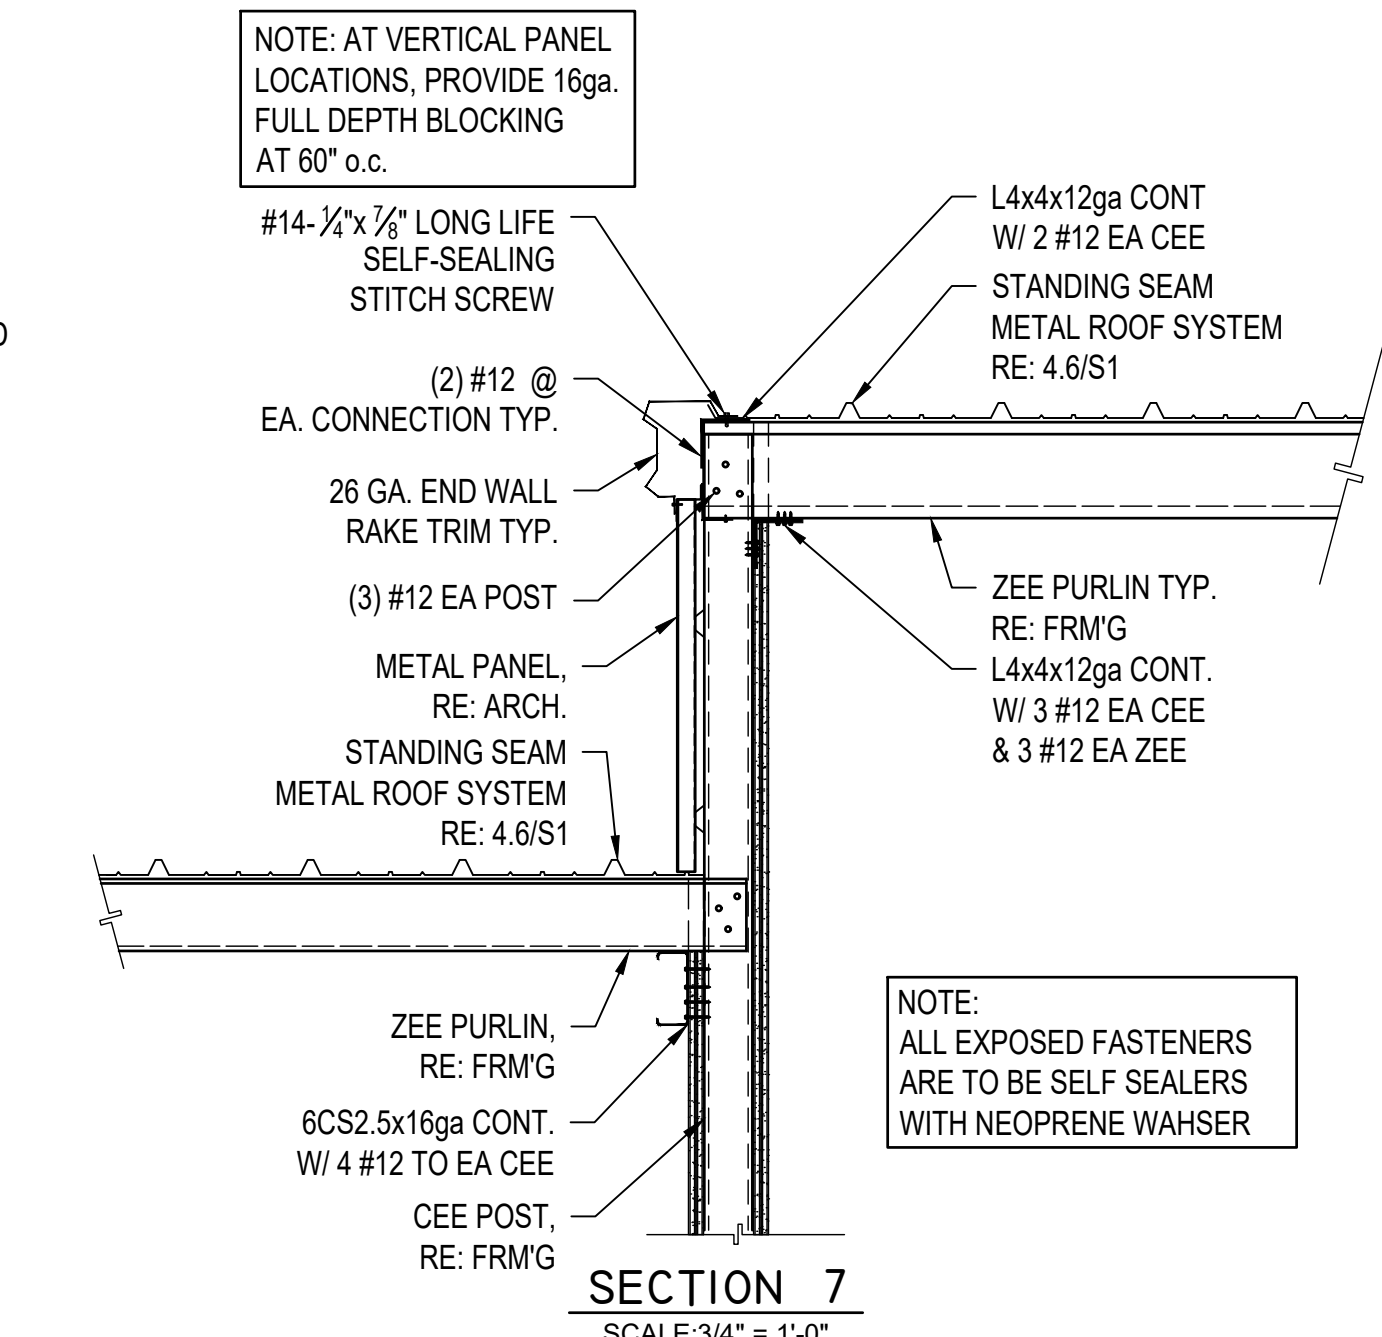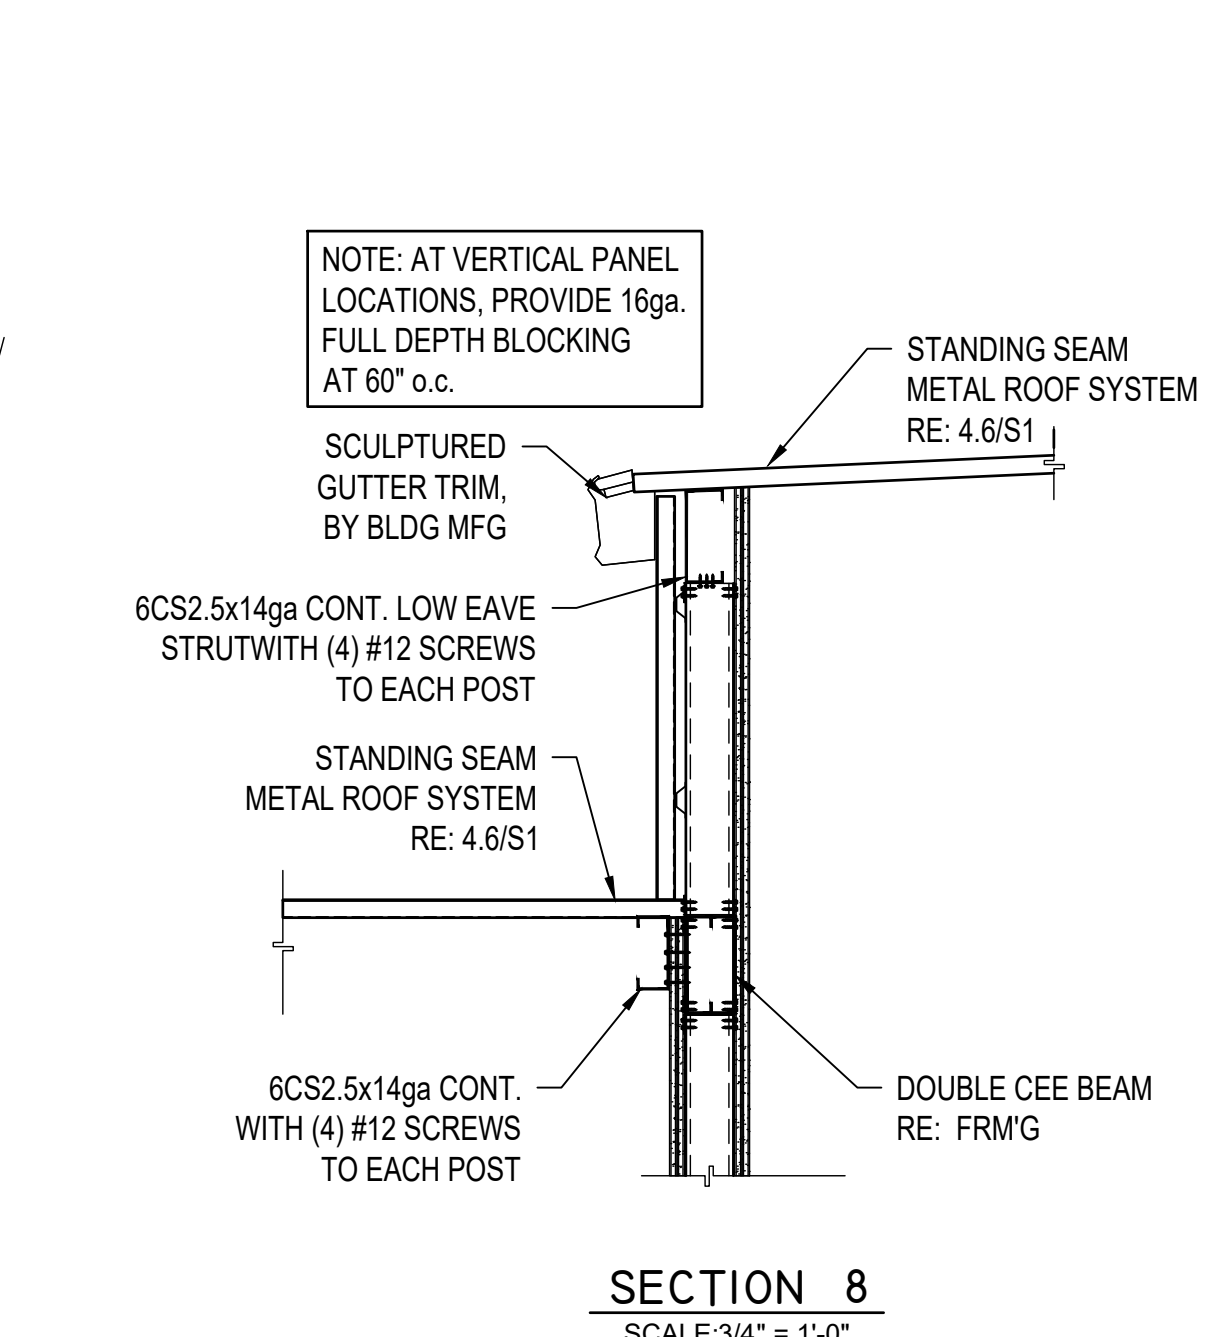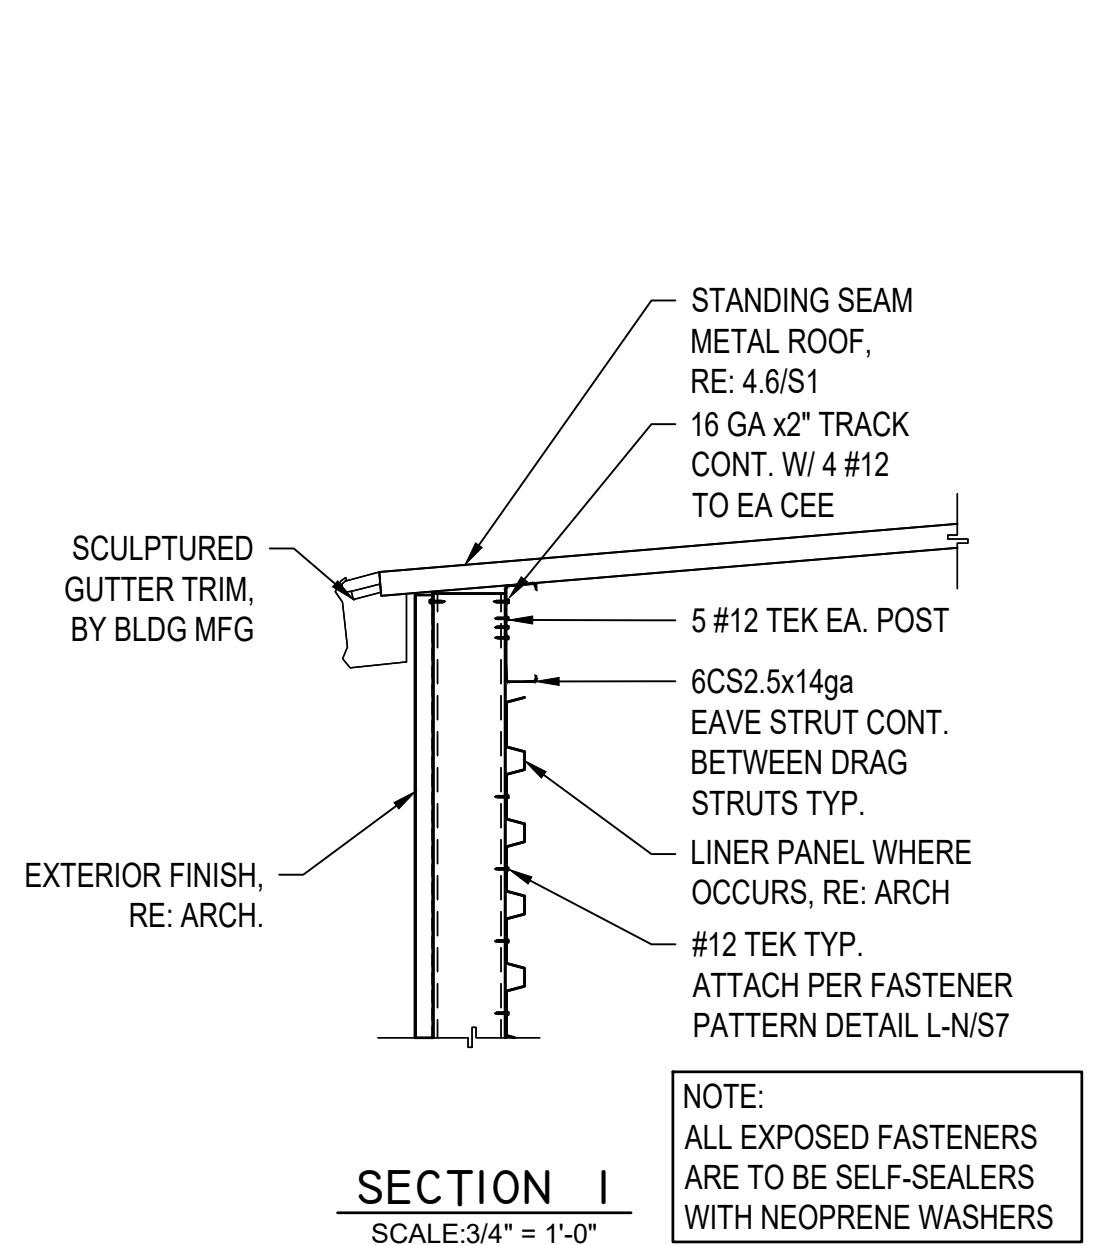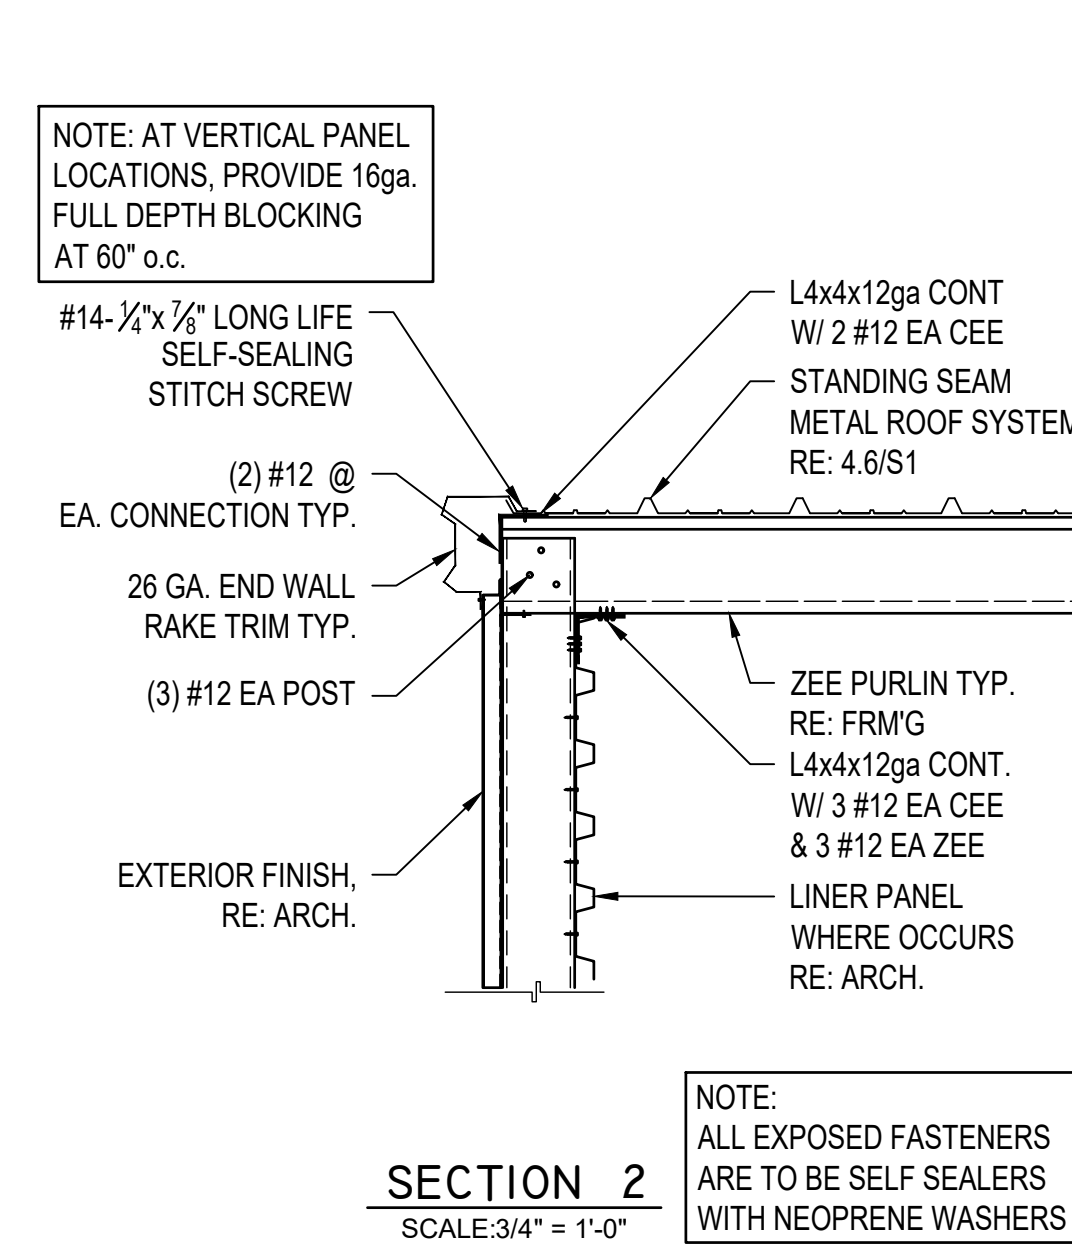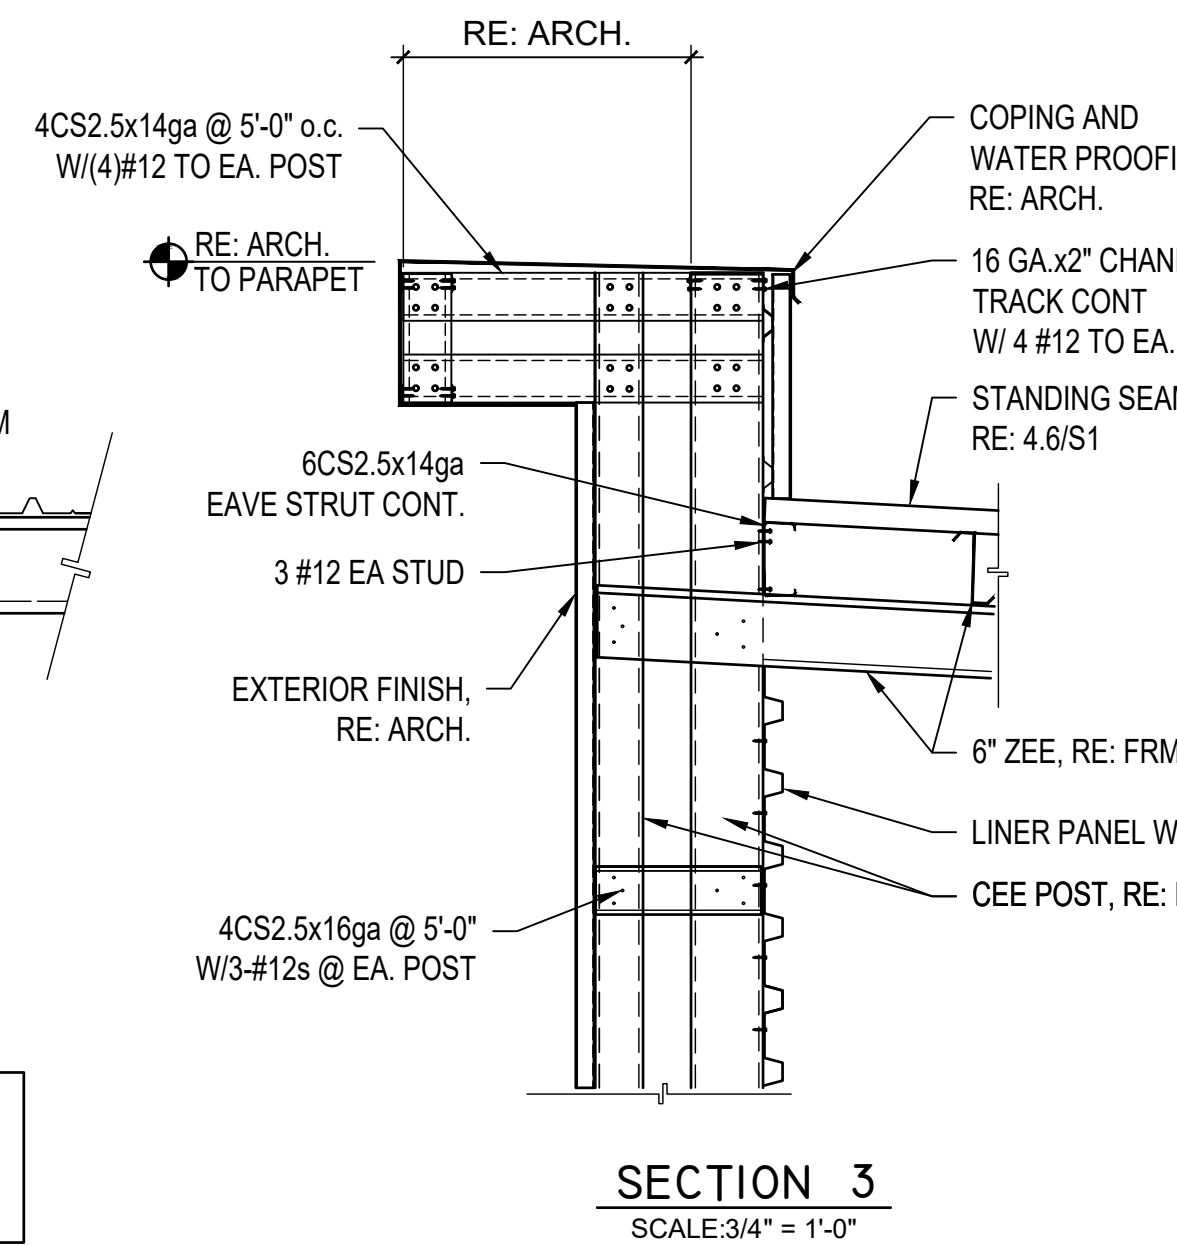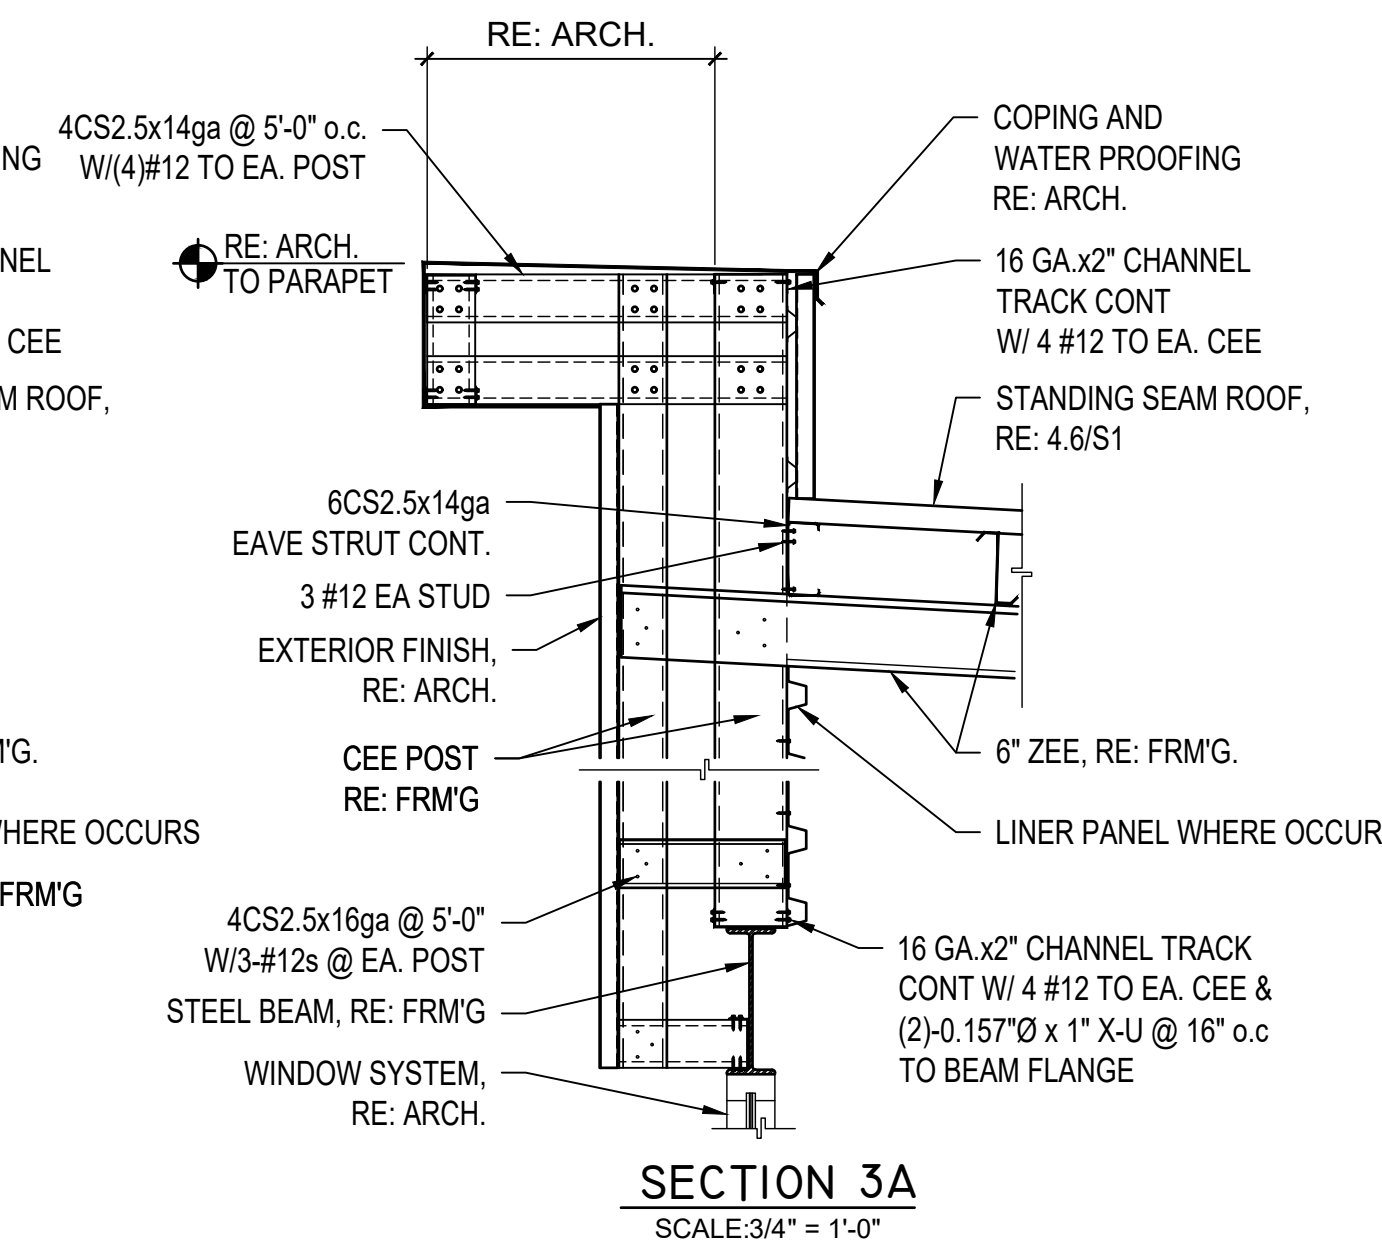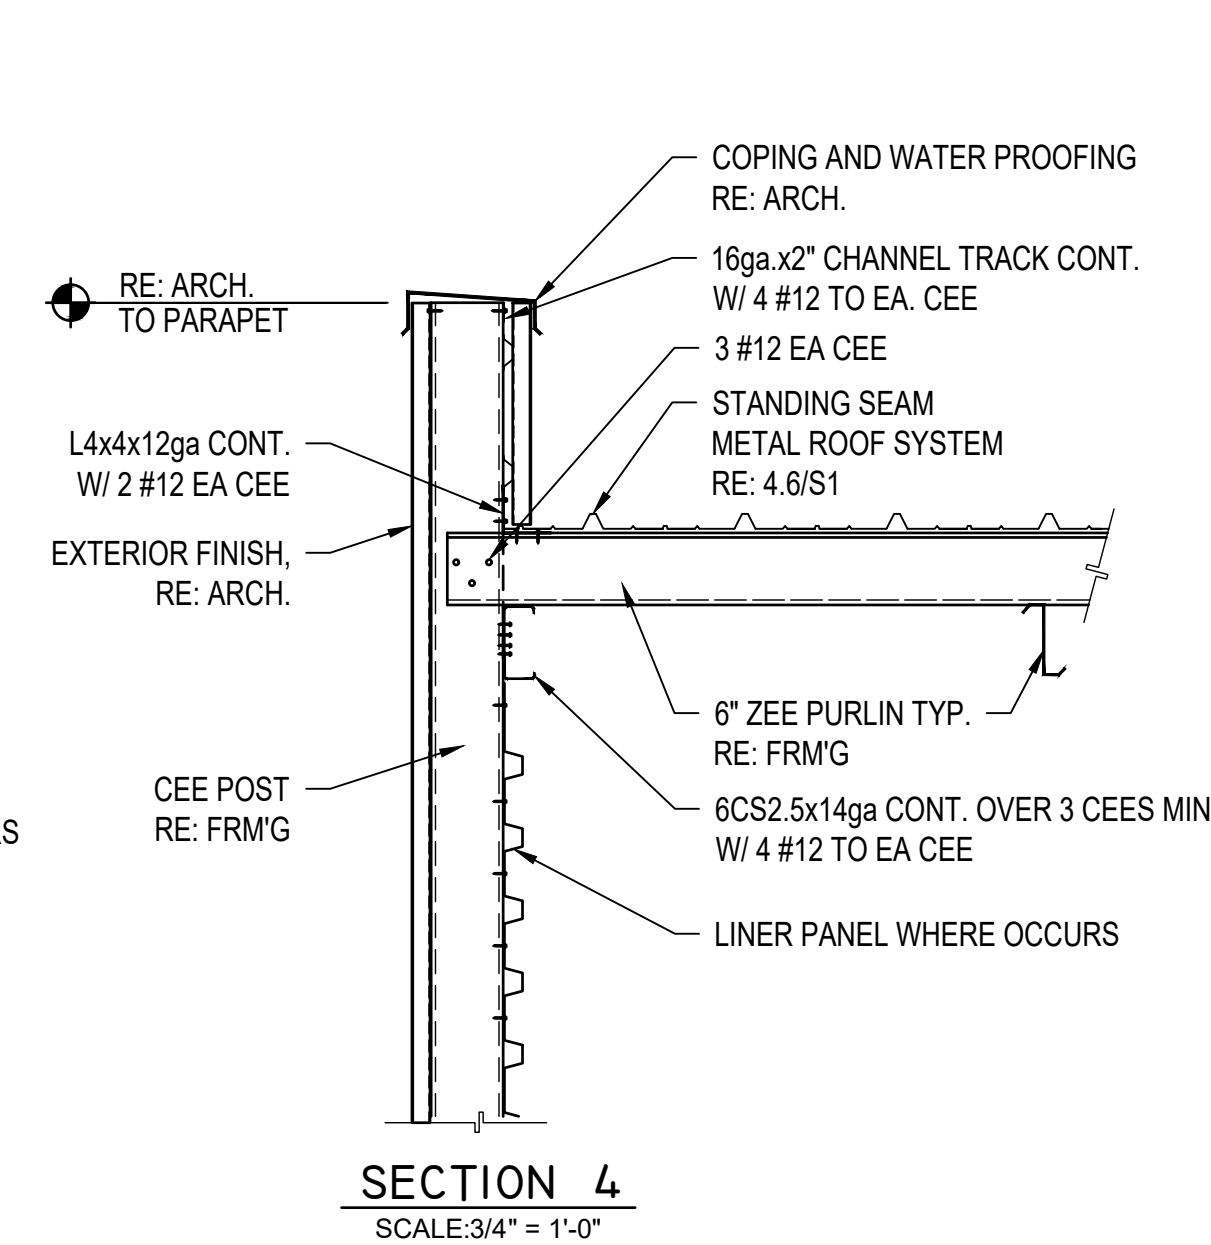

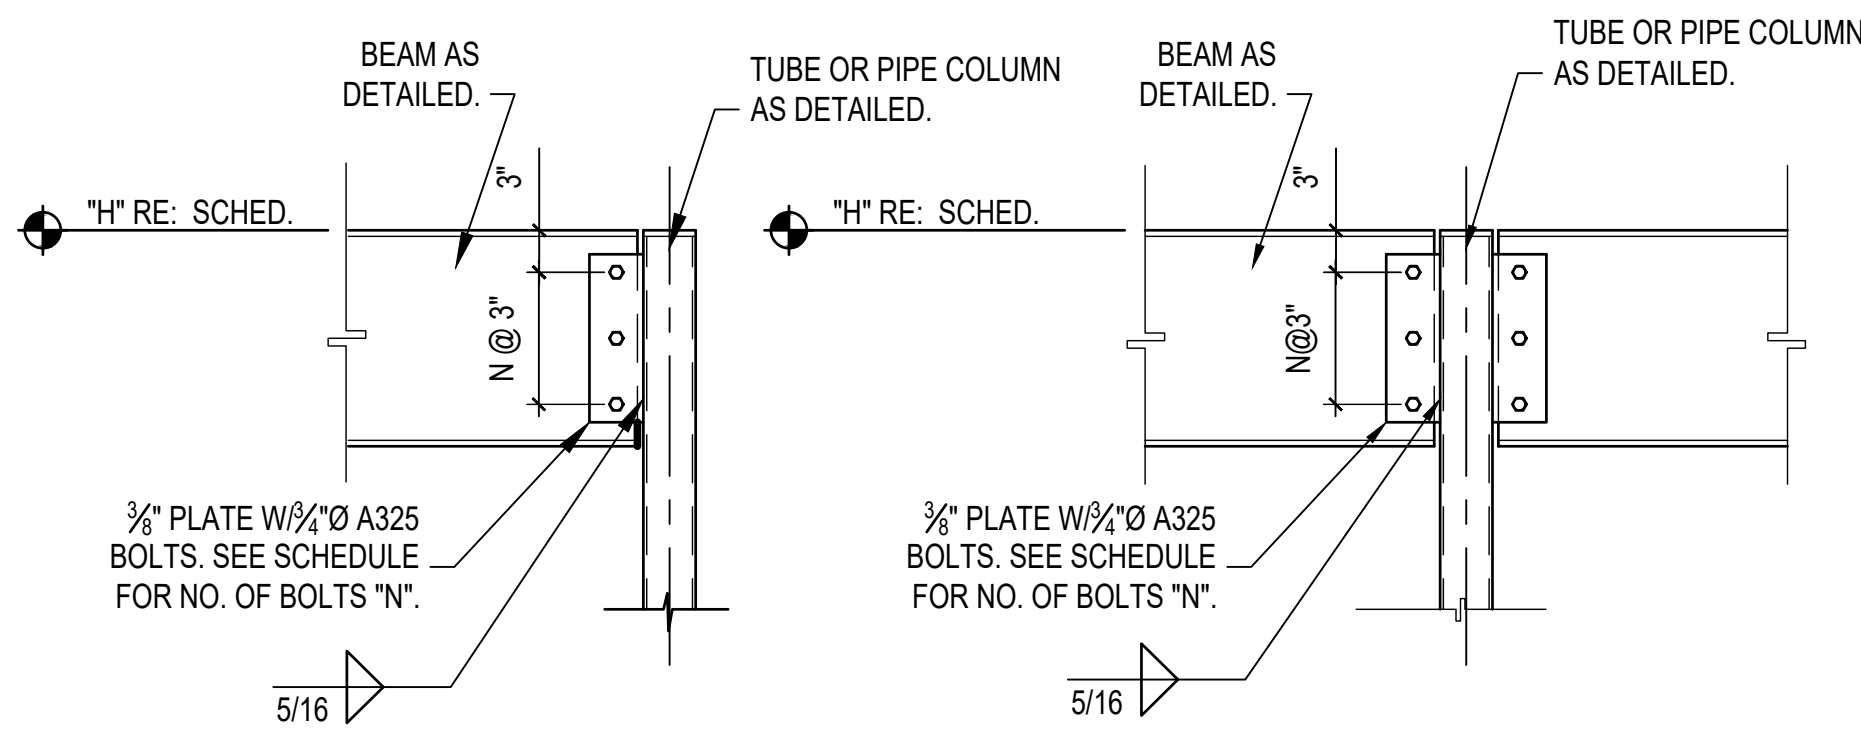


BEAM - COLUMN CONNECTION

DETAIL A
SCALE: 3/4" = 1'-0"

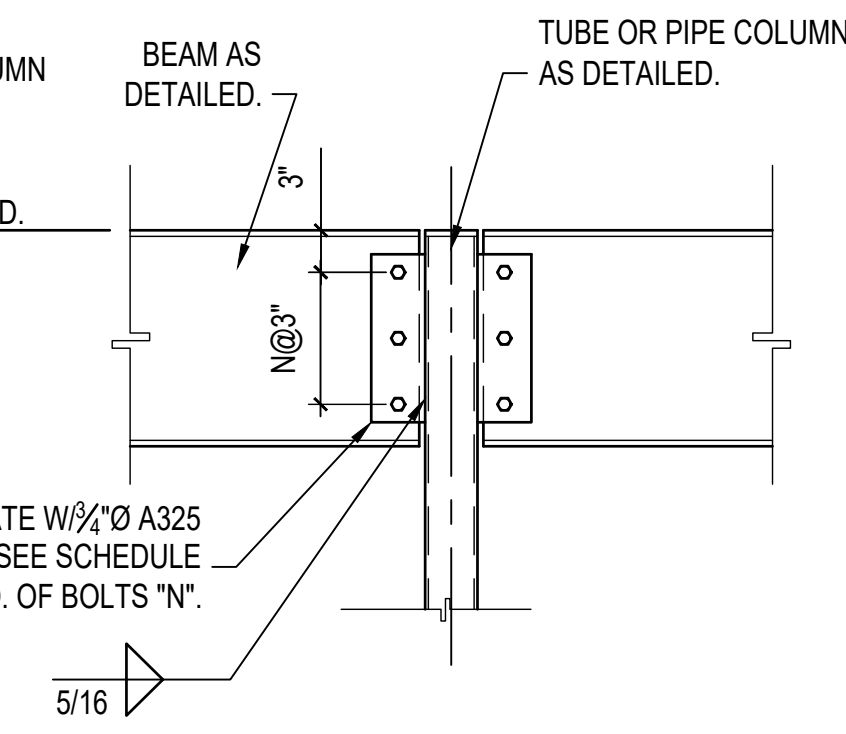


BEAM - COLUMN CONNECTION

DETAIL B
SCALE: 3/4" = 1'-0"

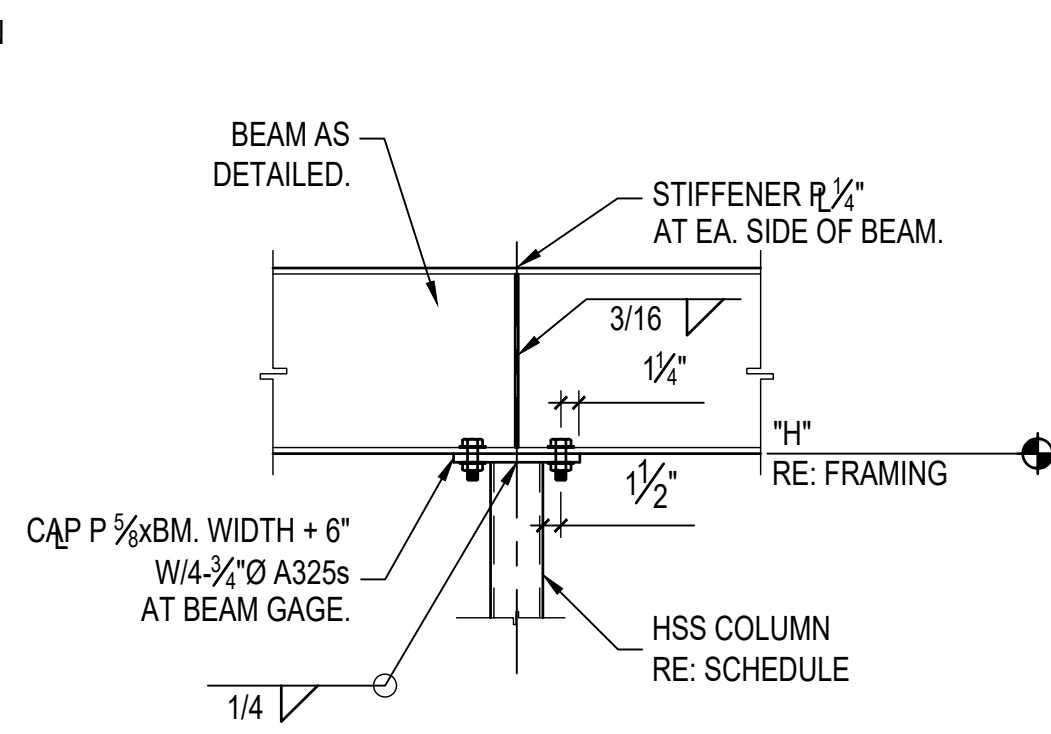


BEAM - COLUMN CONNECTION

DETAIL C
SCALE: 3/4" = 1'-0"

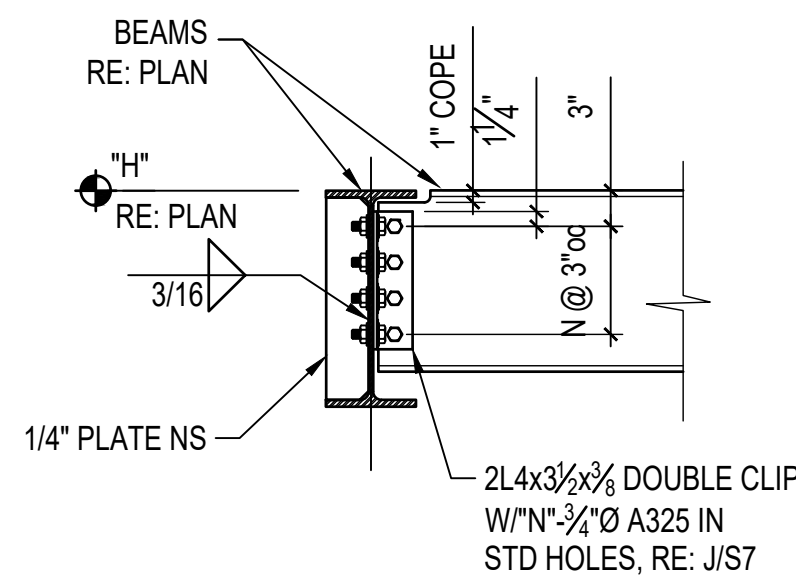


ONE SIDED BEAM TO BEAM CONNECTION

DETAIL D
SCALE: 3/4" = 1'-0"

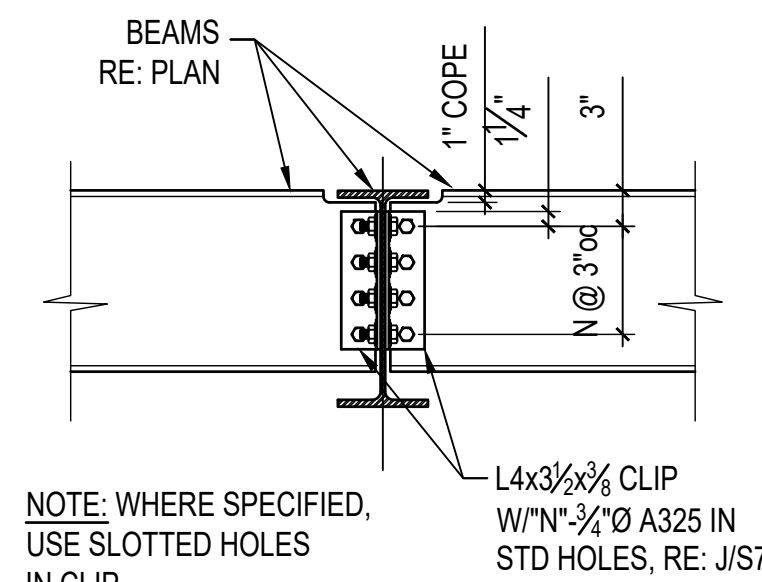


TWO SIDED BEAM TO BEAM CONNECTION

DETAIL E
SCALE: 3/4" = 1'-0"

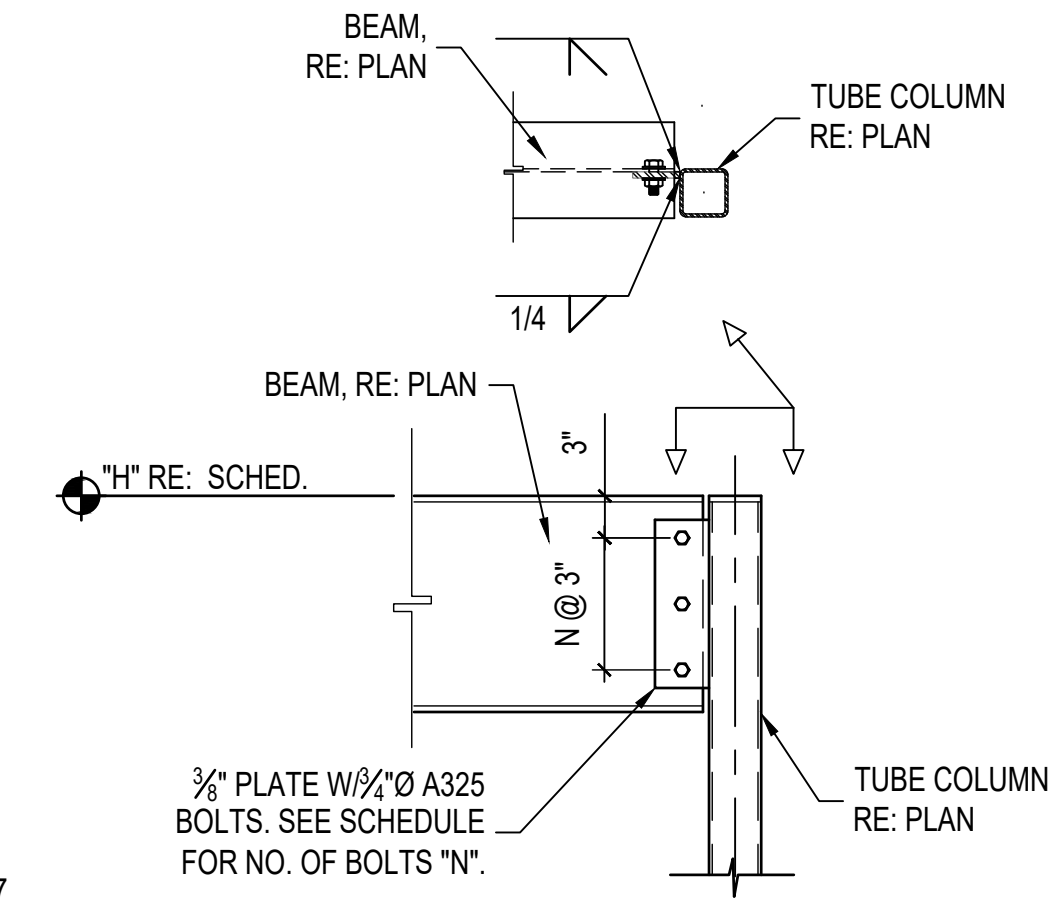

BEAM - COLUMN CONNECTION

DETAIL F
SCALE: 3/4" = 1'-0"

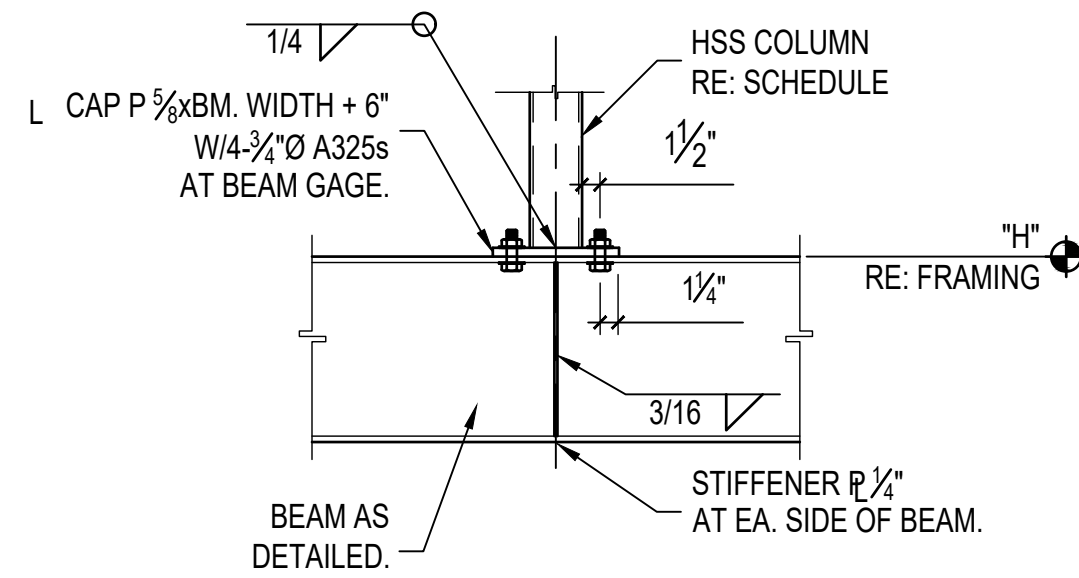


BEAM - STUB COLUMN CONNECTION

DETAIL H
SCALE: 3/4" = 1'-0"

SIZE	N
C8 & C10	2
W8	2
W10	2
W12	3
W14	4
W16	4
W18	5
W21	6
W24	7
W27	8
W30	9


CONNECTION SCHEDULE

DETAIL J
SCALE: 3/4" = 1'-0"

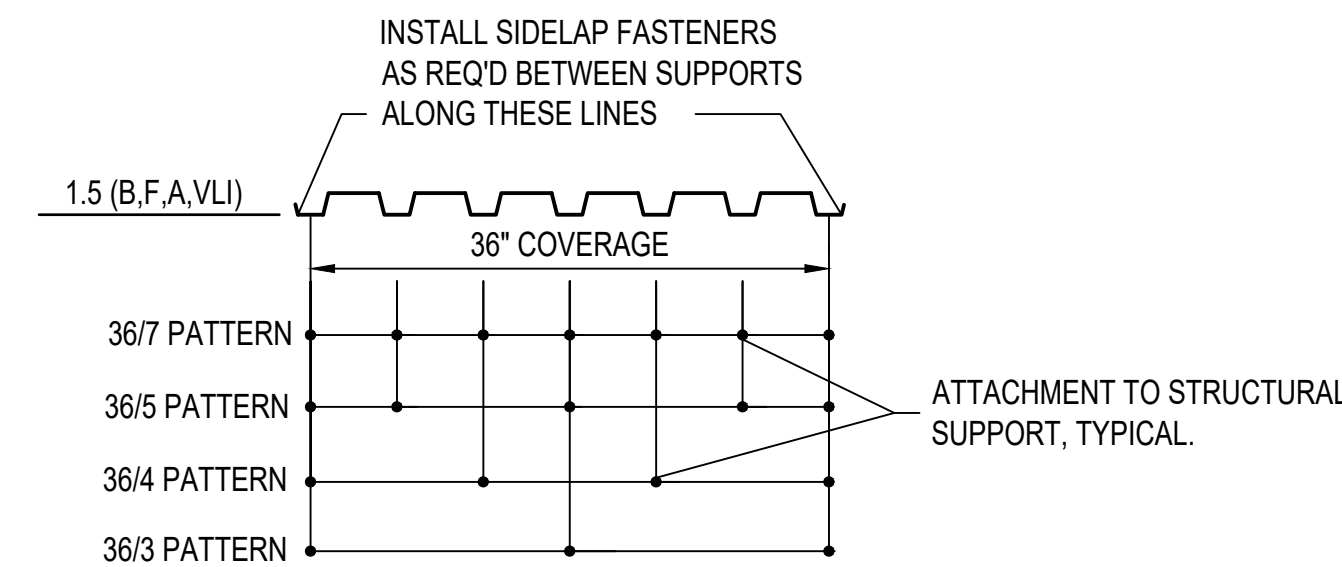


STANDARD DECK CONNECTION LAYOUT

DETAIL K
SCALE: NONE

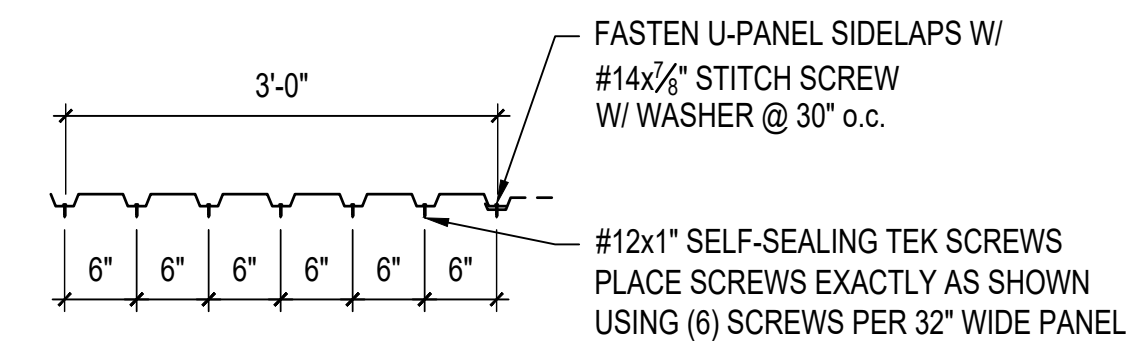


U-PANEL SIDING ATTACHMENT PATTERN

DETAIL L
SCALE: 3/4" = 1'-0"

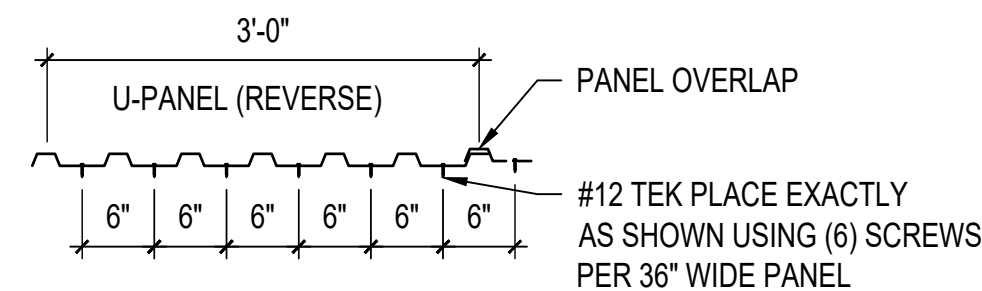


U-PANEL PARTITION ATTACHMENT PATTERN

DETAIL M
SCALE: 3/4" = 1'-0"

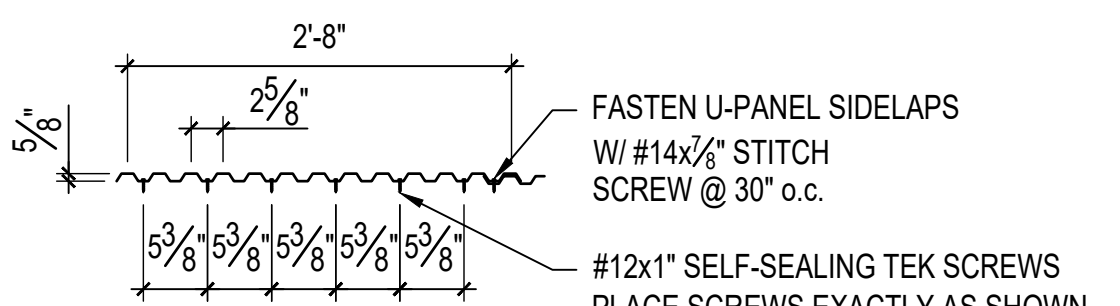


D-PANEL SIDING ATTACHMENT PATTERN

DETAIL N
SCALE: 3/4" = 1'-0"

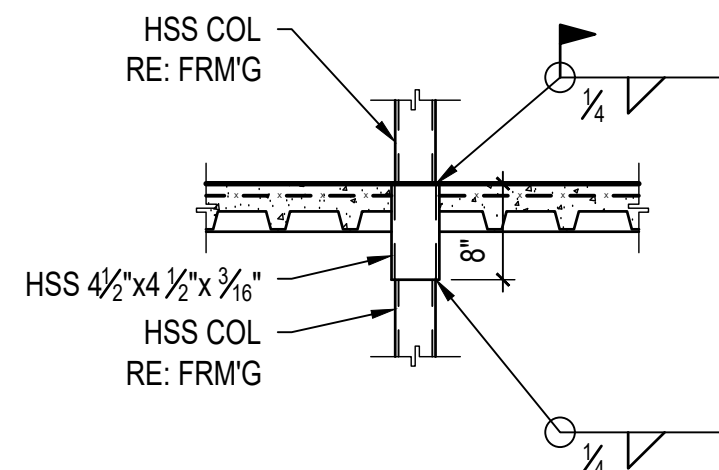


HSS COLUMN SLEEVE CONNECTION

DETAIL P
SCALE: 3/4" = 1'-0"

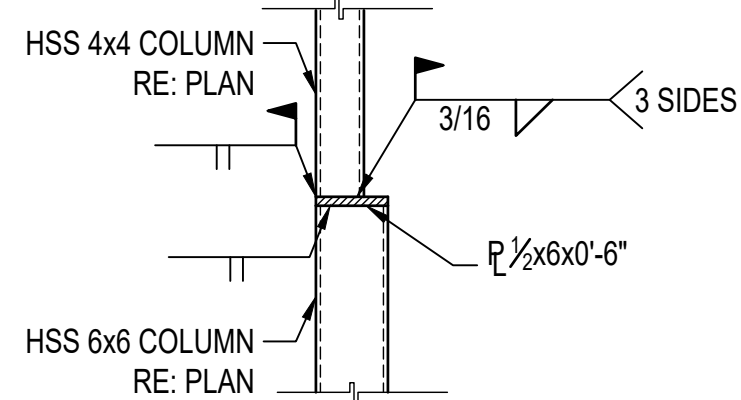

HSS COLUMN SPLICE


DETAIL Q
SCALE: 3/4" = 1'-0"

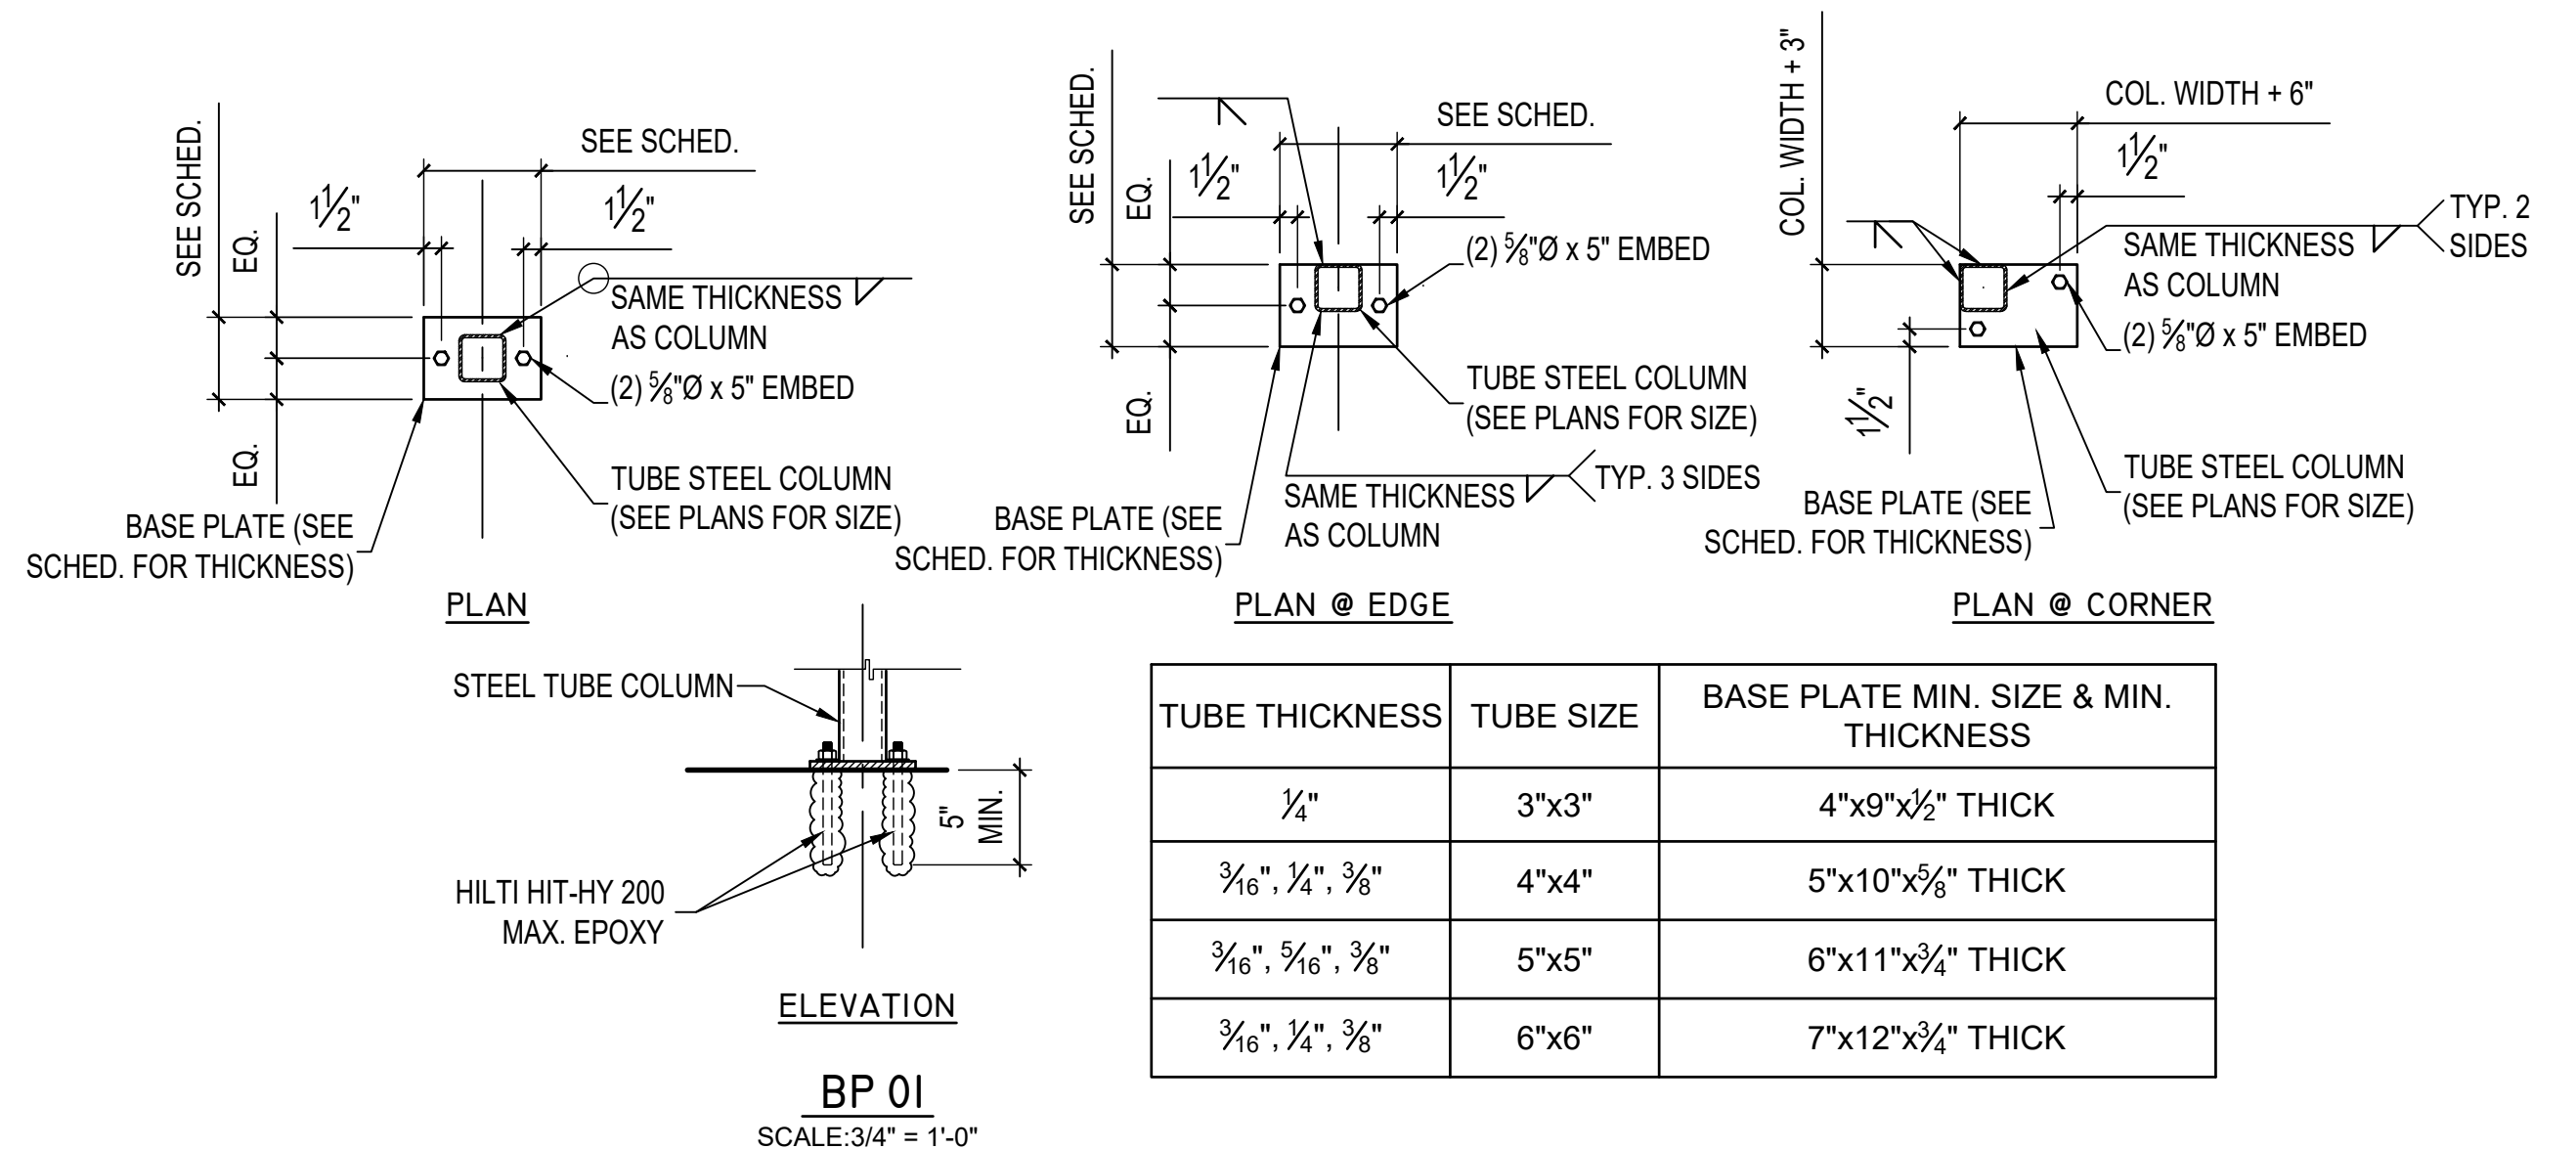

BP 01
SCALE: 3/4" = 1'-0"

TUBE THICKNESS	TUBE SIZE	BASE PLATE MIN. SIZE & MIN. THICKNESS
1/4"	3"x3"	4"x9"x1/2" THICK
3/16", 1/4", 5/16"	4"x4"	5"x10"x3/8" THICK
3/16", 5/16", 3/8"	5"x5"	6"x11"x3/4" THICK
3/8", 1/4", 3/8"	6"x6"	7"x12"x3/4" THICK

NOT USED

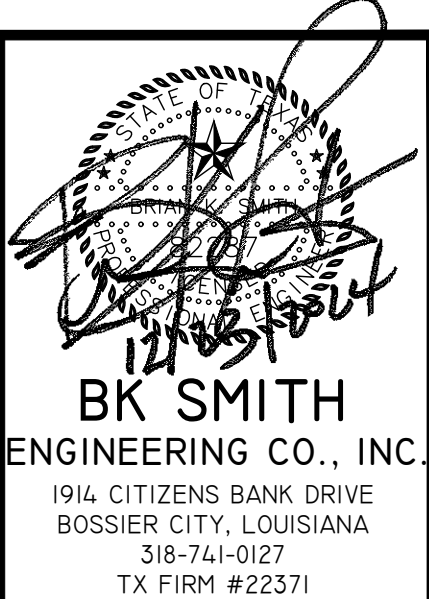

ISSUE	DATE
No.	DATE DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group

ARCHITECTURE

9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co


SHEET TITLE
FRAMING AND
CONNECTION DETAILS

SHEET NUMBER

S7


OF SHEETS

ISSUED FOR PERMIT

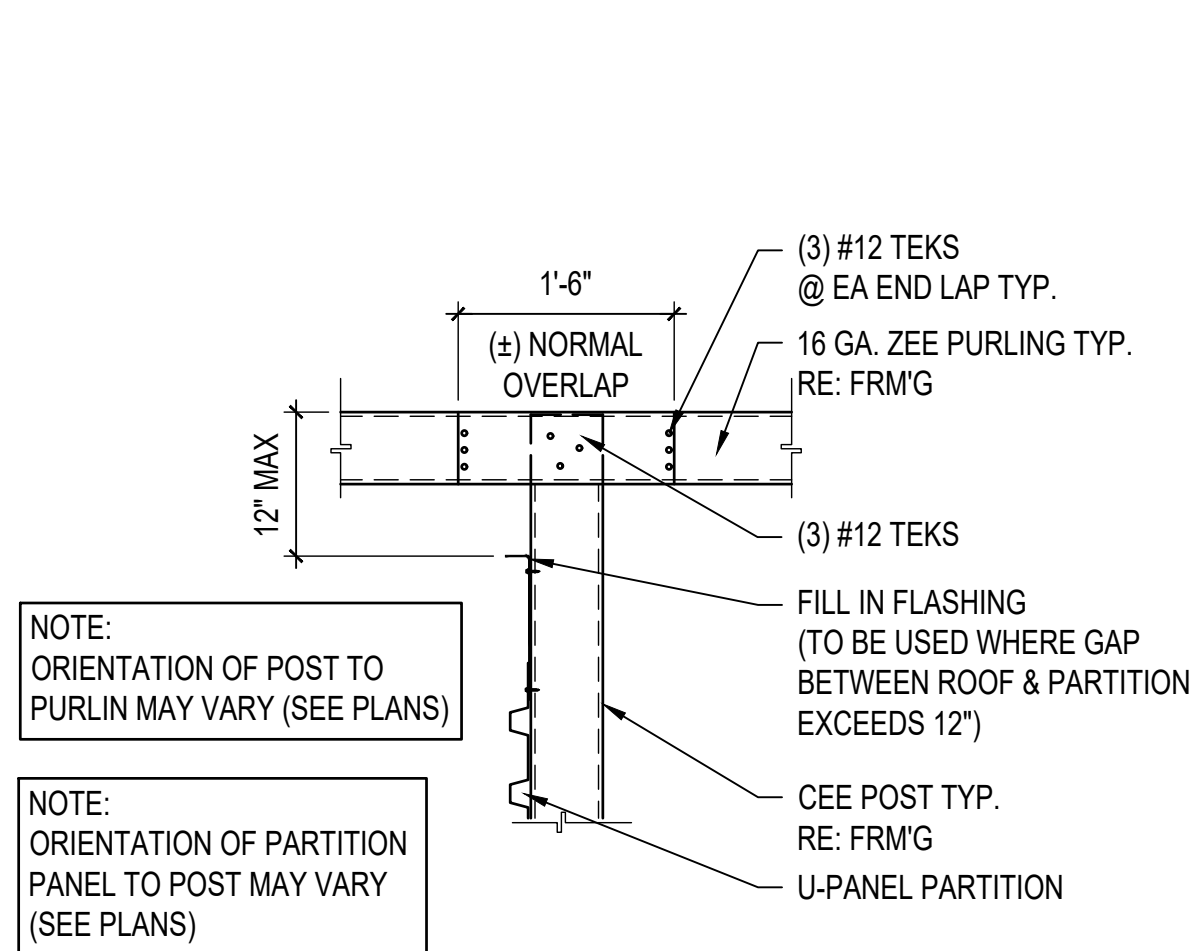


TYP ROOF PURLIN LAP

DETAIL A
SCALE: 3/4" = 1'-0"

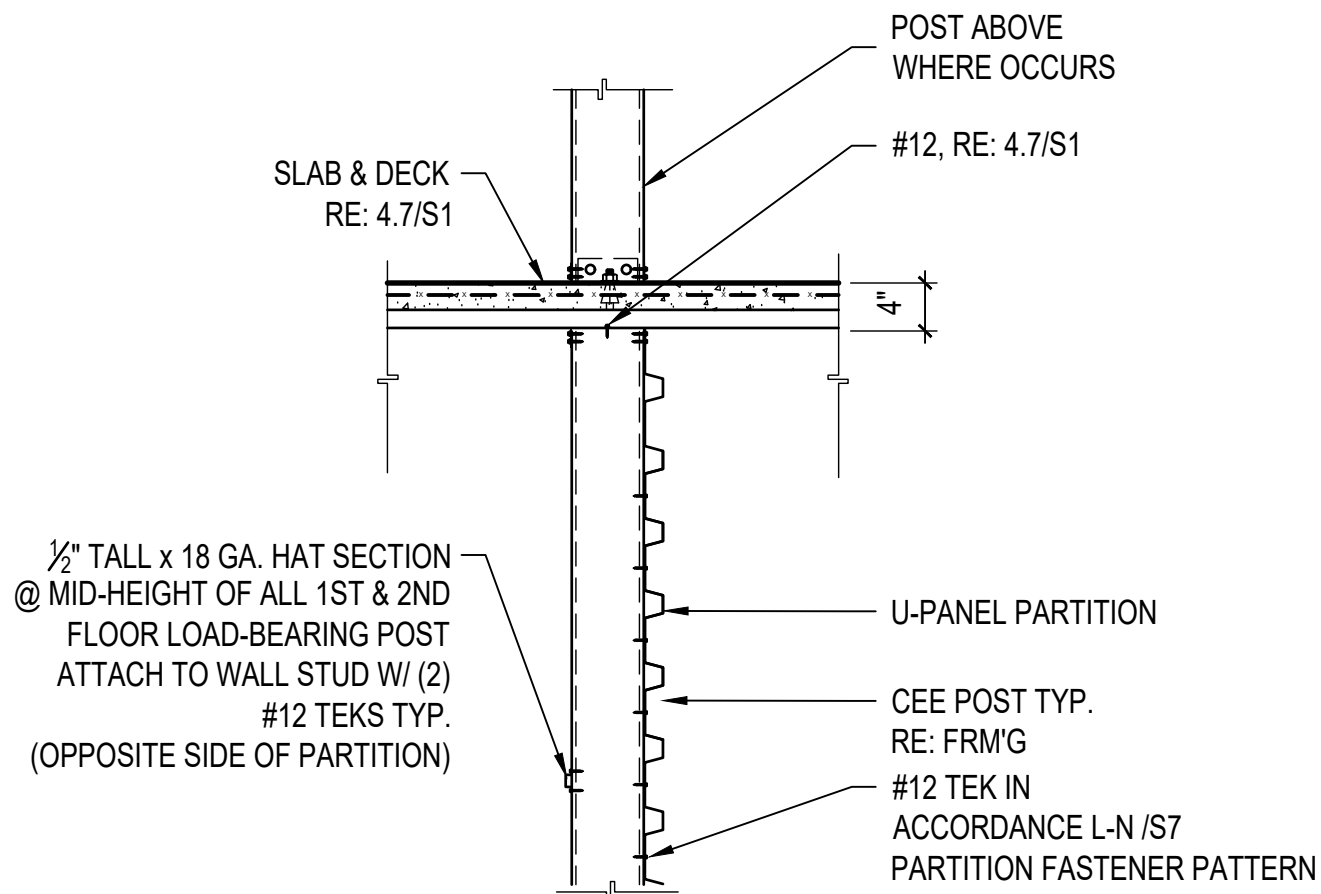


FLOOR BEARING WALL

DETAIL B
SCALE: 3/4" = 1'-0"

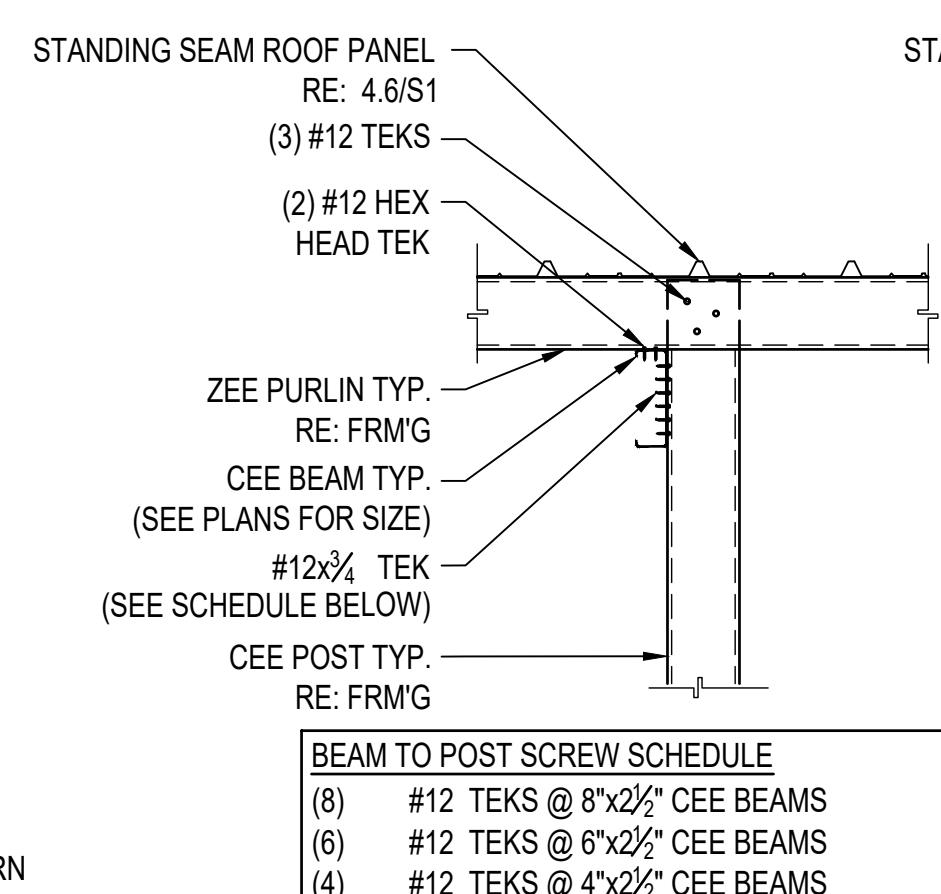


ROOF PURLIN/POST CONNECTION

DETAIL C
SCALE: 3/4" = 1'-0"

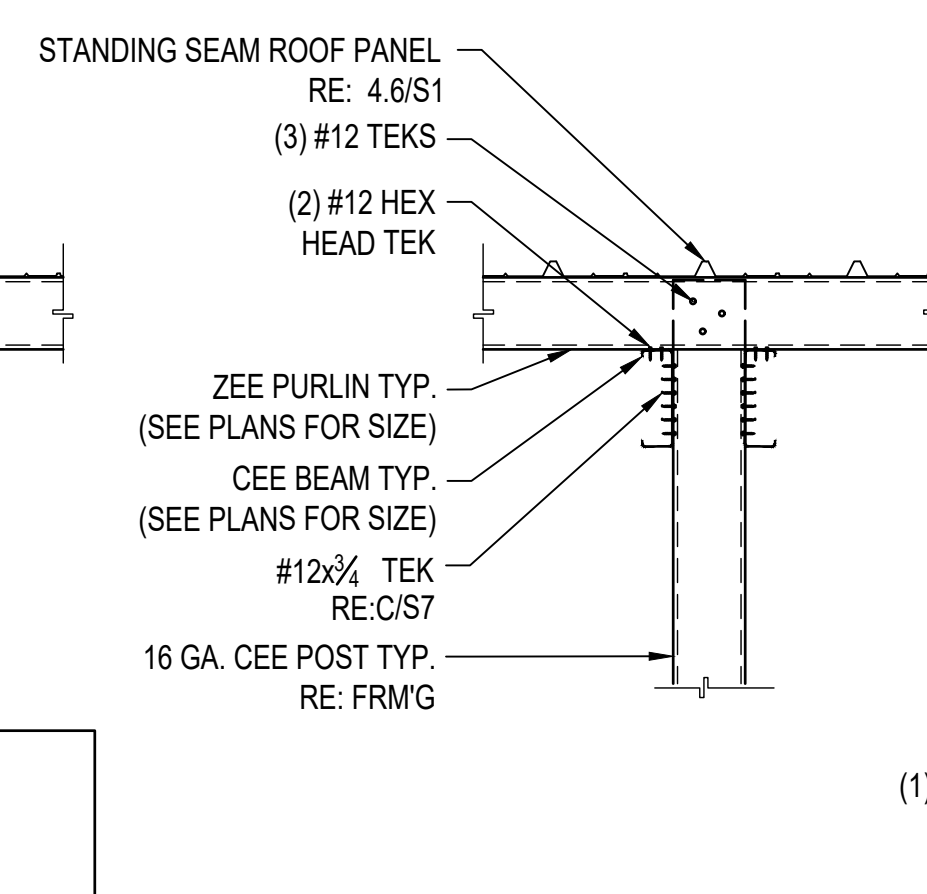


DOUBLE ROOF PURLIN/POST CONNECTION

DETAIL D
SCALE: 3/4" = 1'-0"

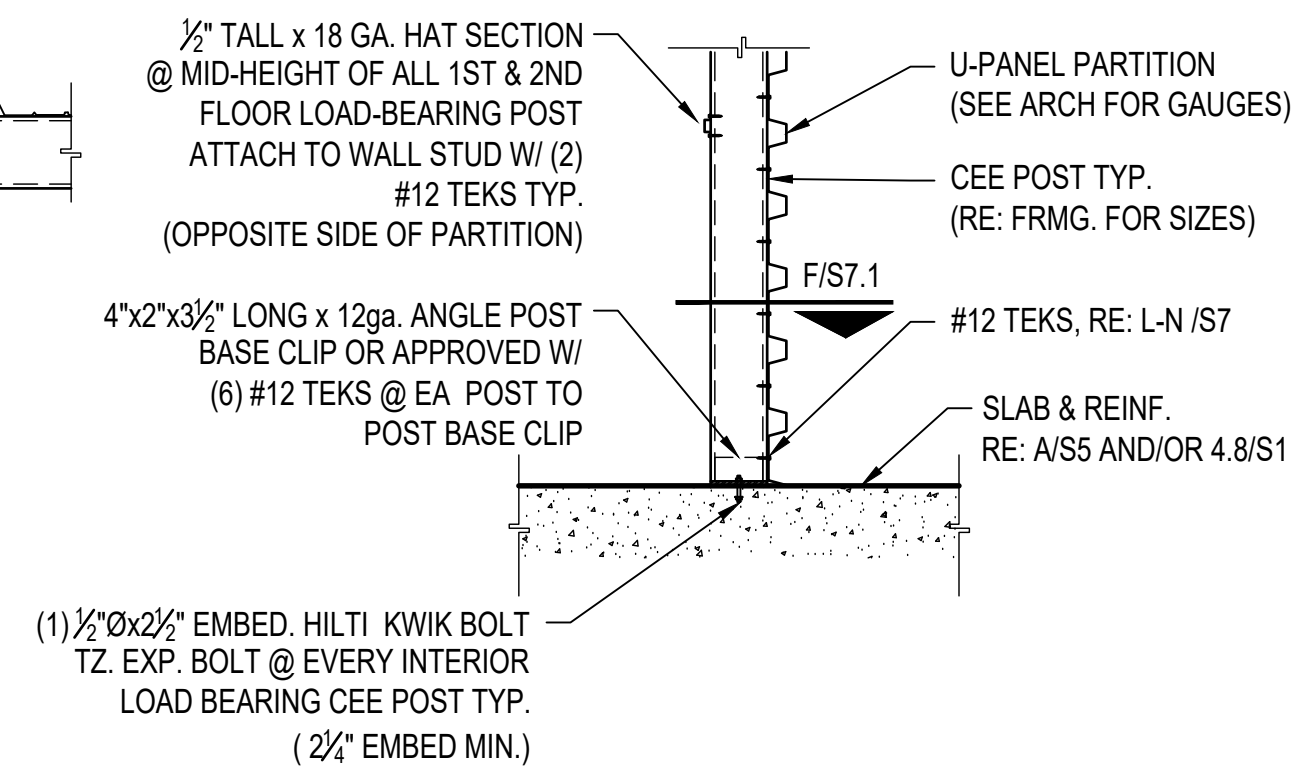


TYP. POST ATTACHMENT TO FLOOR SLAB

DETAIL E
SCALE: 3/4" = 1'-0"

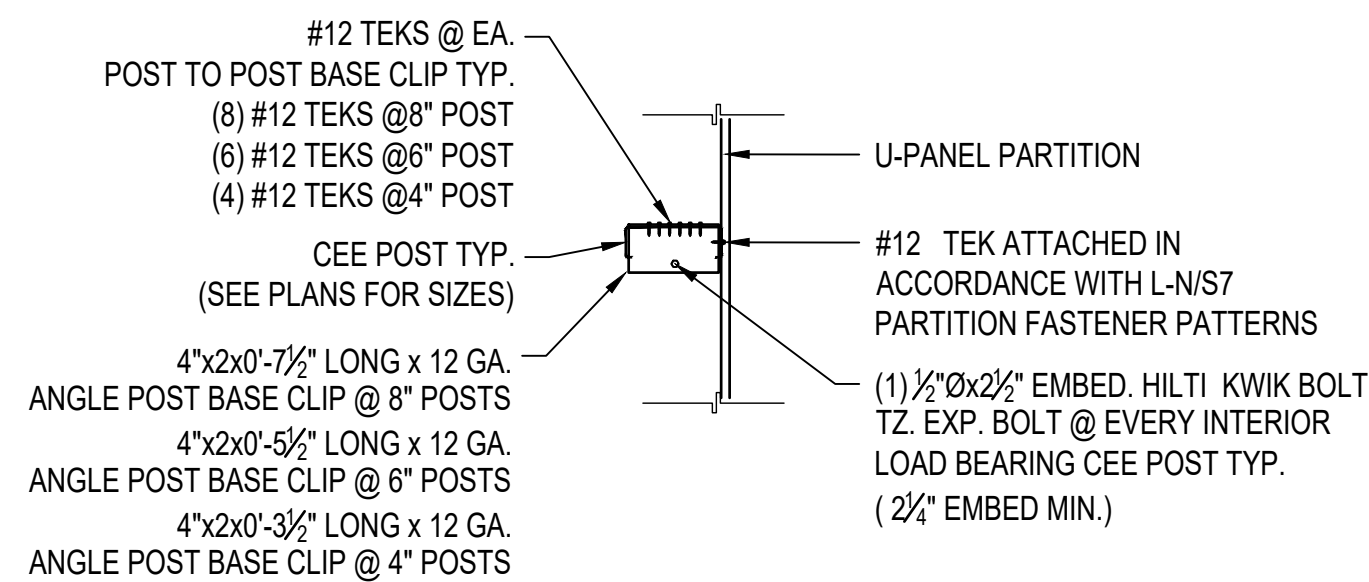


POST ATTACHMENT

DETAIL F
SCALE: 3/4" = 1'-0"

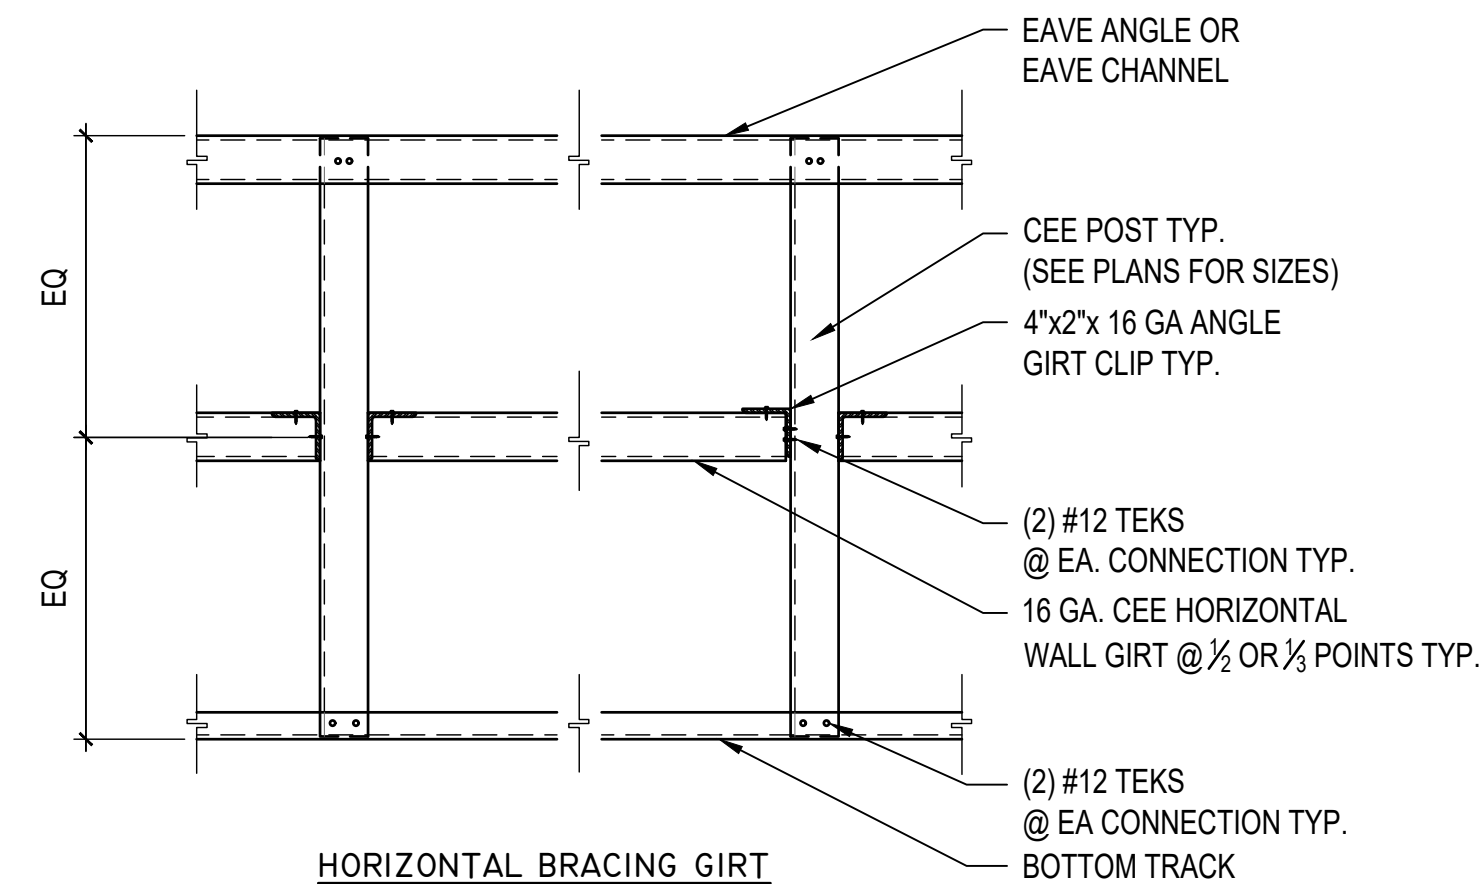


HORIZONTAL BRACING GIRT

DETAIL G
SCALE: 3/4" = 1'-0"

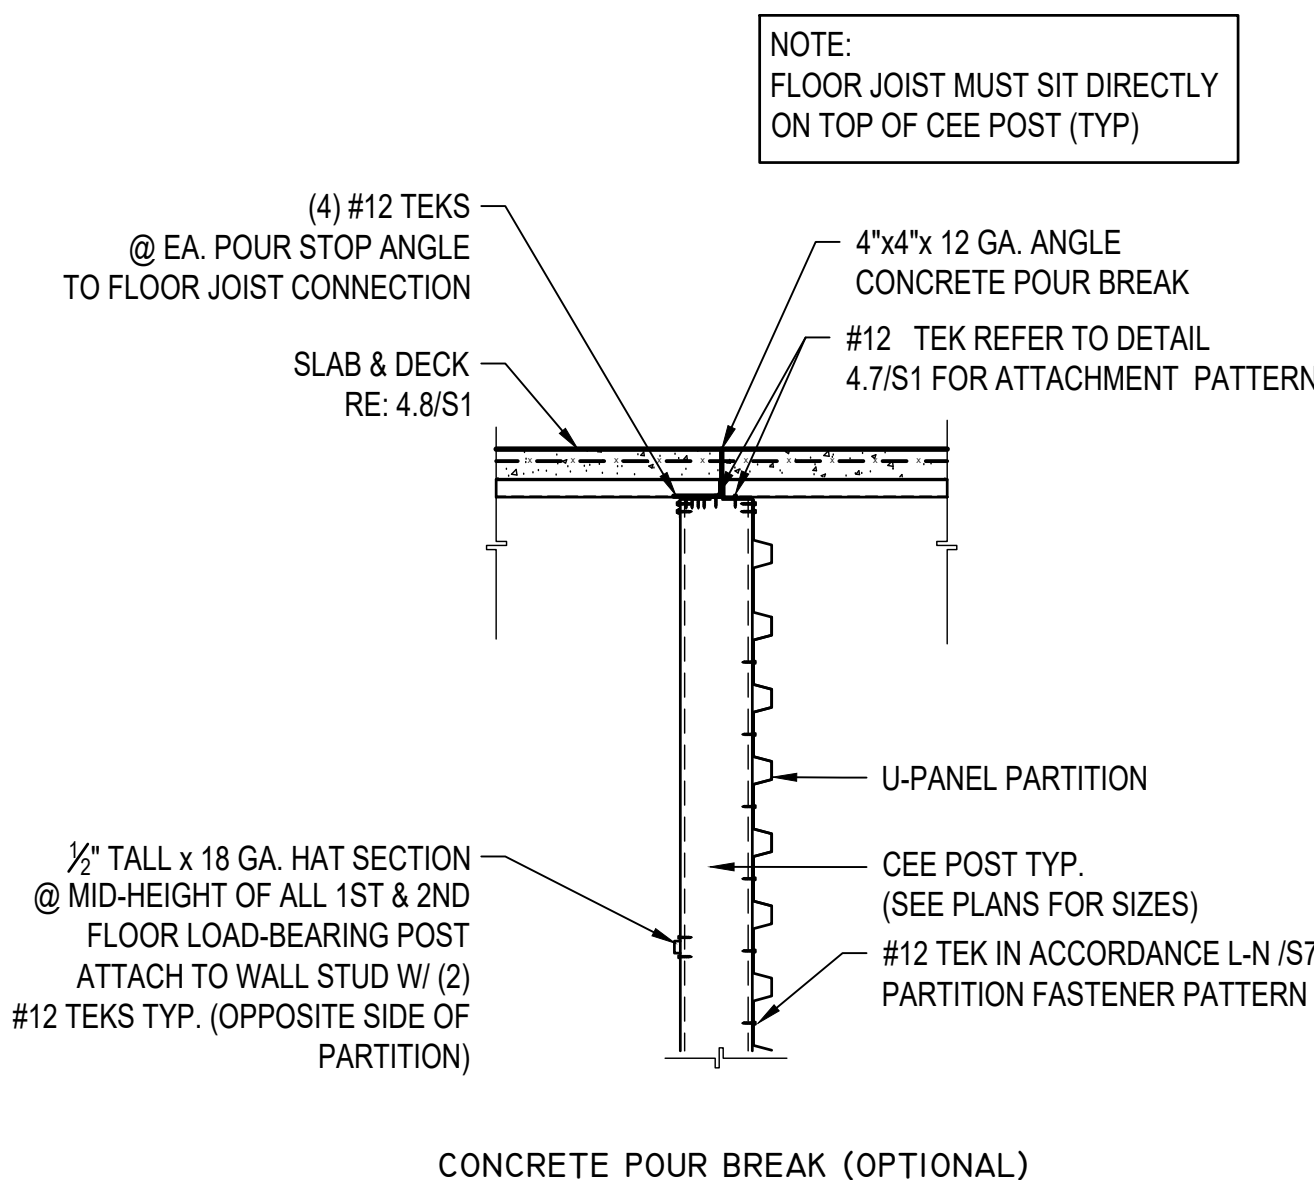


CONCRETE POUR BREAK (OPTIONAL)

DETAIL H
SCALE: 3/4" = 1'-0"

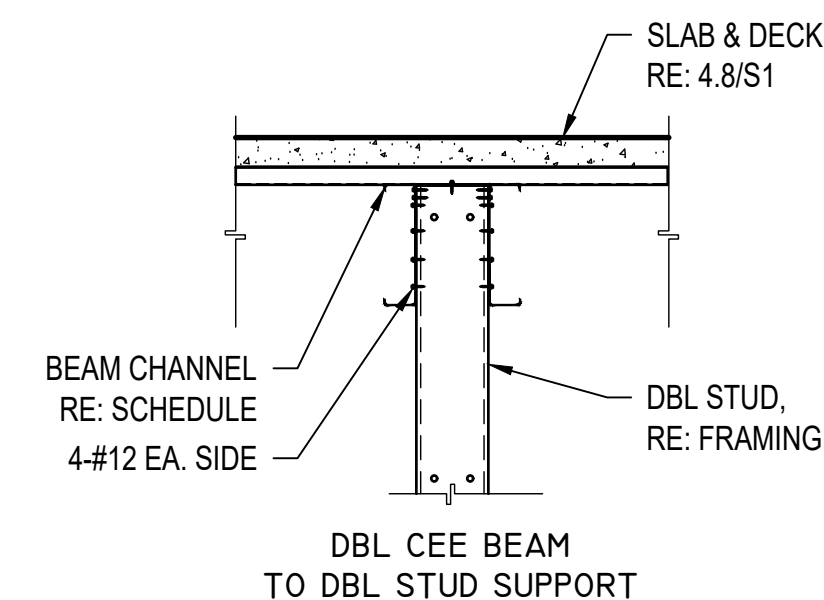


DBL CEE BEAM TO DBL STUD SUPPORT


DETAIL J
SCALE: 3/4" = 1'-0"

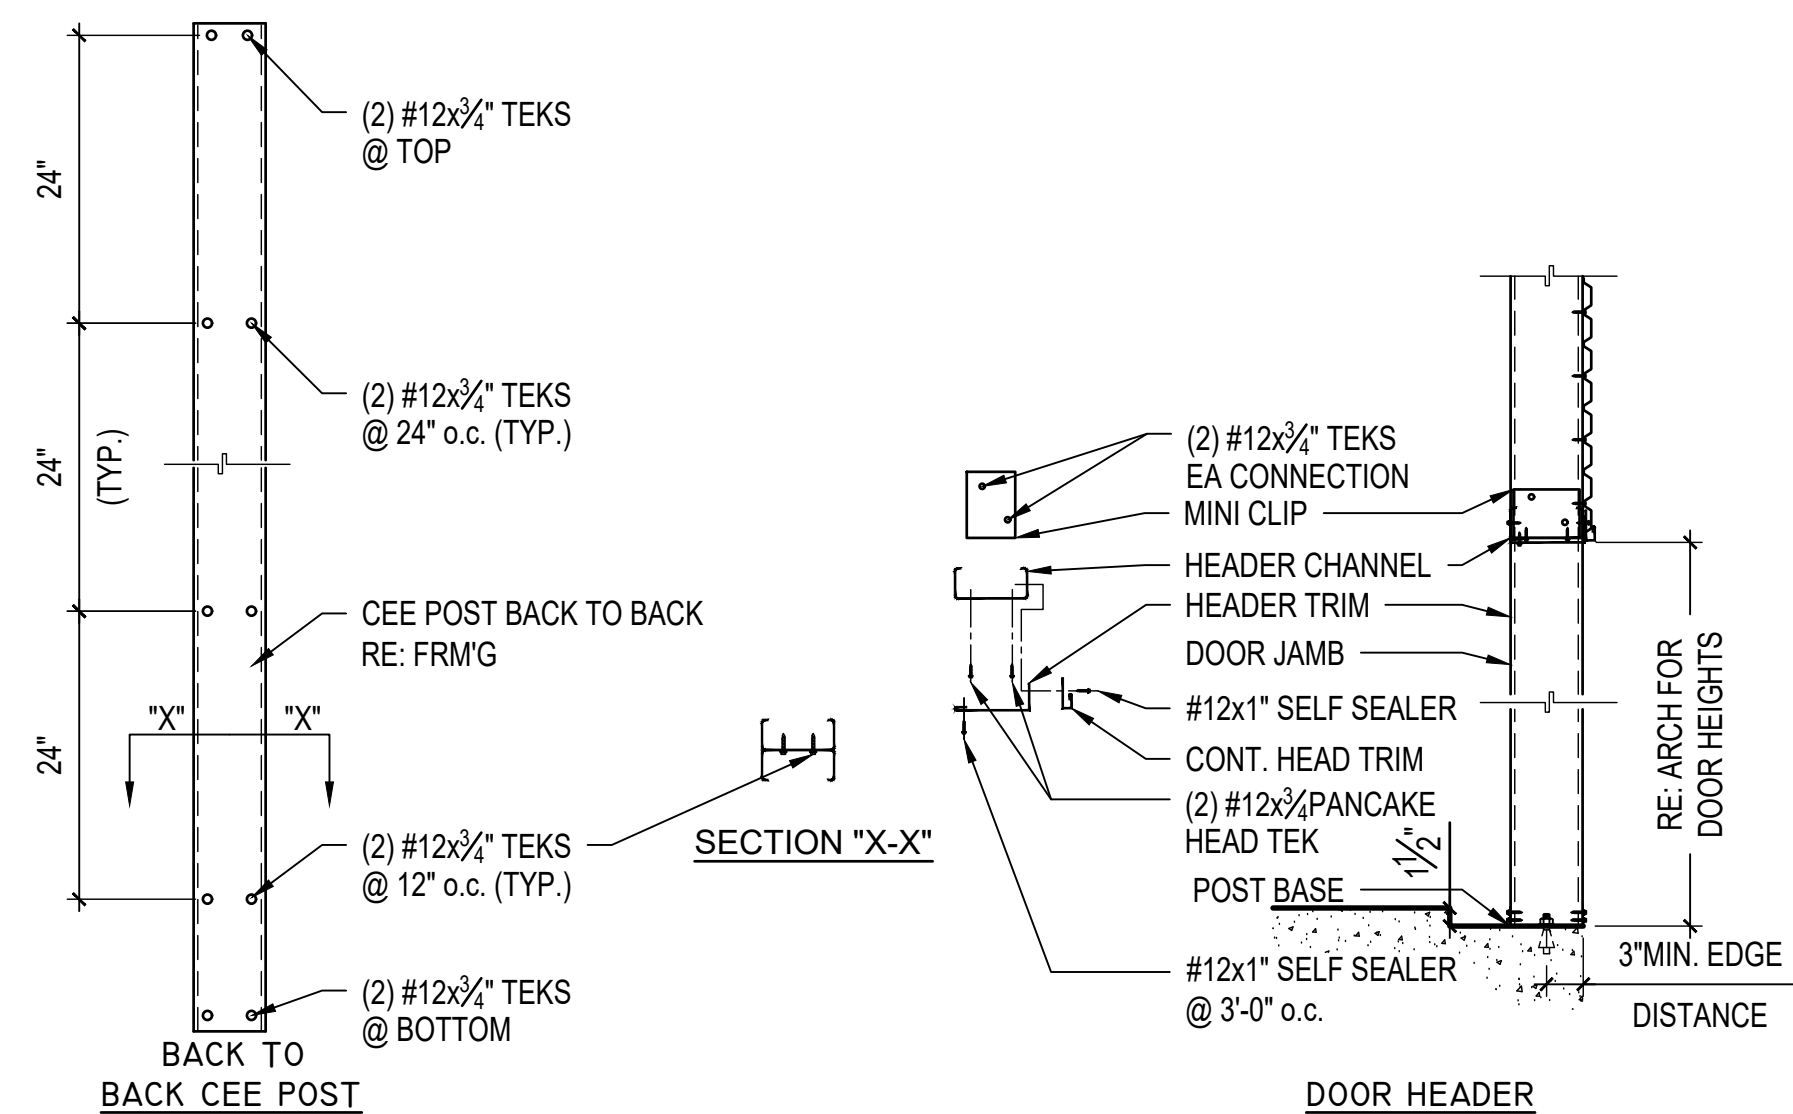


DETAIL K
SCALE: 3/4" = 1'-0"

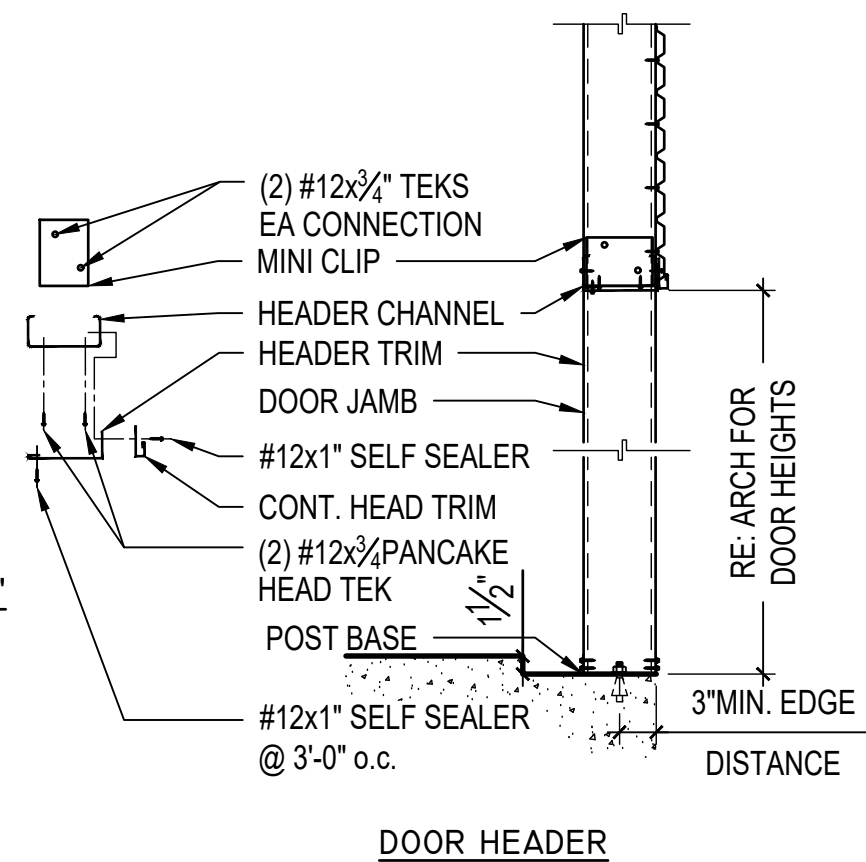


DETAIL L
SCALE: 3/4" = 1'-0"

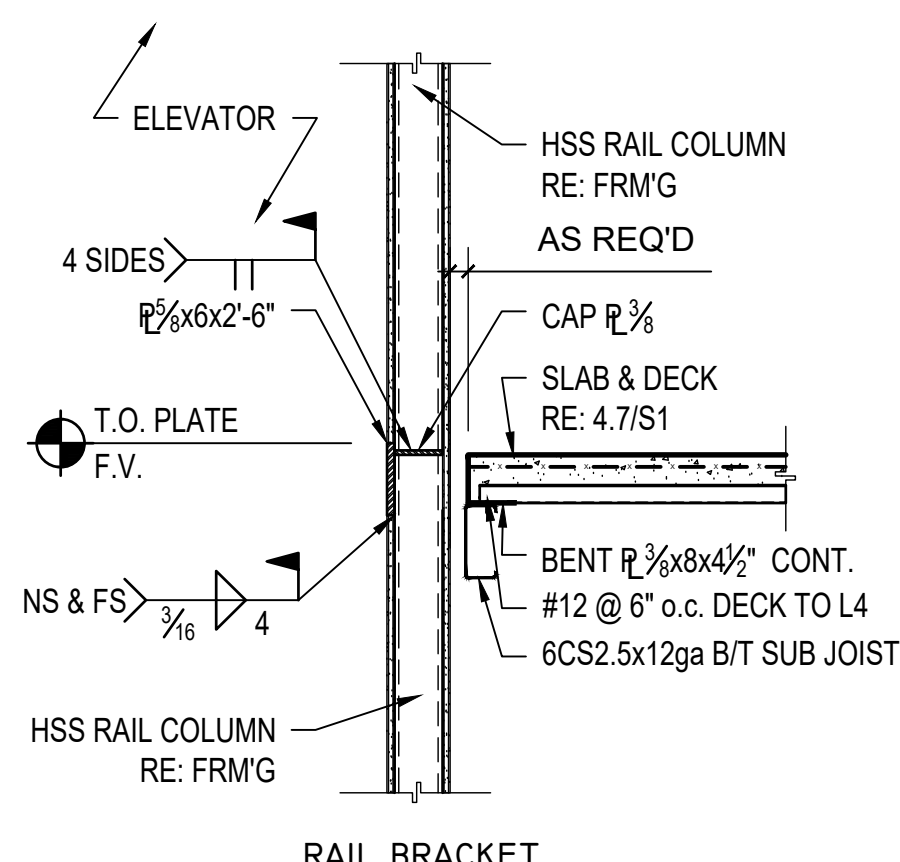


DETAIL M
SCALE: 3/4" = 1'-0"

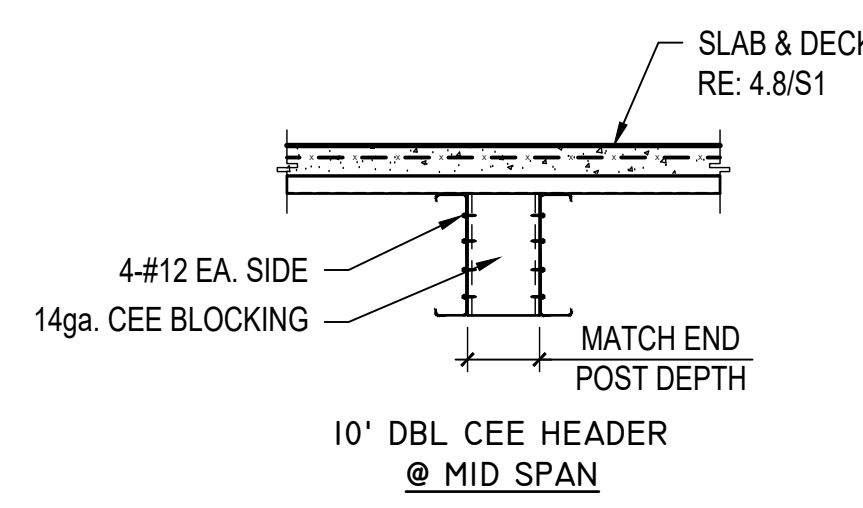

DETAIL N
SCALE: 3/4" = 1'-0"

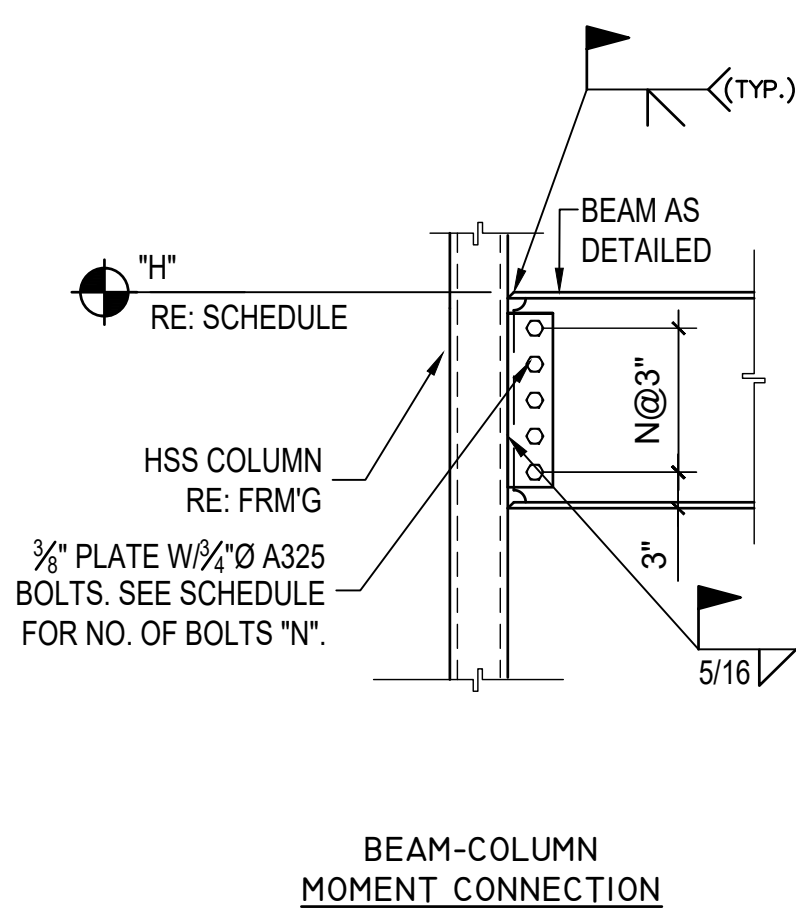

DETAIL P
SCALE: 3/4" = 1'-0"

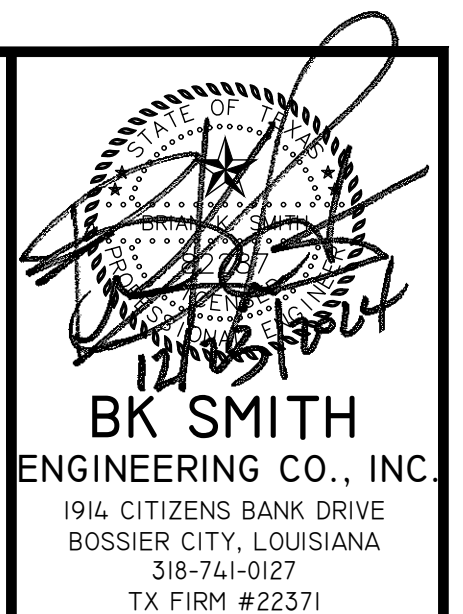

ISSUE	DATE
No.	DATE
	DESCRIPTION

MAGNOLIA VILLAGE INVESTMENTS LP
MAGNOLIA VILLAGE STORAGE
38650 SPUR 149
MAGNOLIA, TEXAS 77354

Kaufman
Design
Group

ARCHITECTURE

9415 E. HARRY ST.
SUITE 405
WICHITA, KS 67207
(316) 618-0448
sally@kgdinc.co

SHEET TITLE
FRAMING AND
CONNECTION DETAILS

SHEET NUMBER

S7.1
OF SHEETS

ISSUED FOR PERMIT